



TMR1341XD

High-Sensitivity Pneumatic Cylinder Switch Sensor

General Description

TMR1341XD is a digital omnipolar magnetic switch that integrates Magneto-resistance and CMOS technology to provide a magnetically triggered digital switch with high sensitivity, high speed, and low power consumption. It is designed for pneumatic cylinder position sensing in industrial applications. It contains a push-pull full-bridge MR sensor and CMOS signal processing circuitry within the same package, including an on-chip voltage generator and MR voltage amplifier and comparator for precise magnetic sensing, plus a Schmitt trigger to provide switching hysteresis for noise rejection, and CMOS push-pull output. An internal band gap regulator is used to provide a temperature compensated supply voltage for internal circuits, permitting a wide range of supply voltages. The TMR1341XD operates in low voltage and draws only 40µA resulting in low power operation. It has fast response, accurate switching points, excellent thermal stability, and immunity to stray field interference. It is available in the DFN2x2x0.55 -3L package.

Features and Benefits

- Low Power Consumption at 40uA
- Power-cycled Latching Operation
- Fast Internal Switching Frequency at 1kHz
- Omnipolar Operation with North or South Pole
- Low Switching Points for High Sensitivity
- Compatible with a Wide Range of Supply Voltages
- Excellent Thermal Stability
- High Tolerance to External Magnetic Field Interference
- Compact package size in DFN2x2x0.55 -3L




TMR1341XD


Applications

- Pneumatic Cylinder Position Switches
- Proximity Switches
- Position Detection

Block Diagram

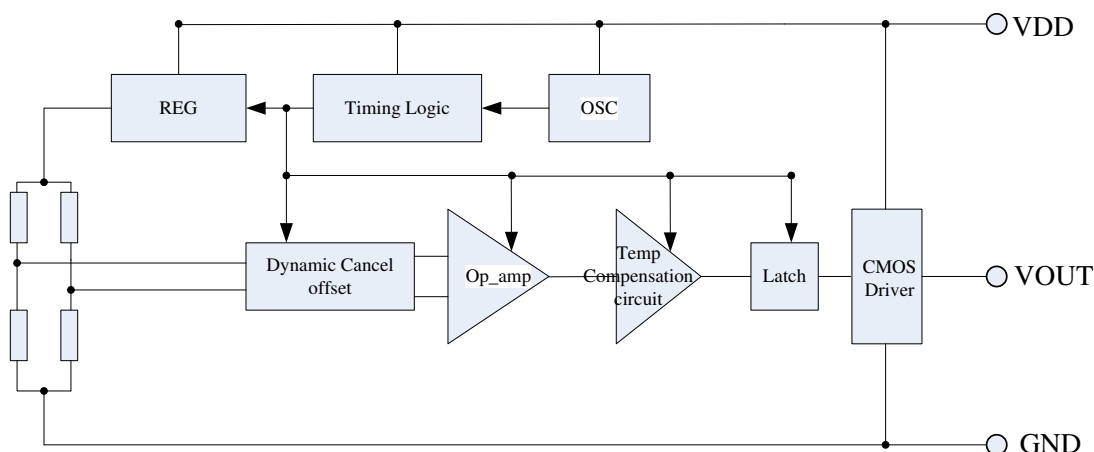

Pin Configuration

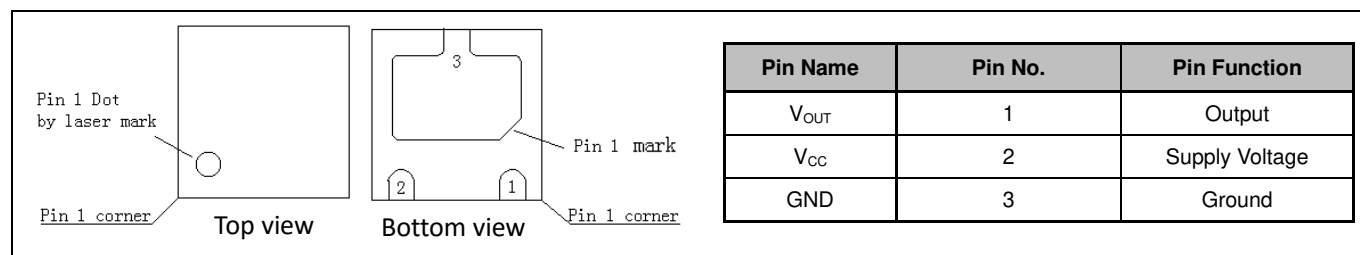

Absolute Maximum Ratings

Parameter	Symbol	Limit	Unit
Supply Voltage	V _{CC}	7	V
Reverse Supply Voltage	V _{RCC}	0.3	V
Output Current	I _{OUTSINK}	20	mA
Magnetic Flux Density	B	5000	G
ESD level(HBM)	V _{ESD}	4	kV
Operating Ambient Temperature	T _A	-40 ~ 125	°C
Storage Temperature	T _{stg}	-50 ~ 150	°C

Electrical Characteristics (T_A=25°C)

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Supply Voltage	V _{CC}	Operating	1.6	1.8	5	V
Output High Voltage	V _{OH}		V _{CC} -0.2		V _{CC}	V
Output Low Voltage	V _{OL}	Output=Low, V _{CC} =3V, I _{sink} =10mA	0		0.2	V
Supply Current (Average)	I _{CC}			40		µA
Supply Current (Sleep)	I _{CC-sleep}			30		µA
Supply Current (Active)	I _{CC-active}			250		µA
Switching Frequency	F			1000		Hz

Note: a 100nF capacitor is connected between V_{CC} and GND during all tests in the above table.


Magnetic Characteristics (T_A=25°C)

Parameters	Symbol	Min	Typ.	Max	Units
Operate Point	B _{OPS}		15		G
	B _{OPN}		-15		G
Release Point	B _{RPS}		10		G
	B _{RPN}		-10		G
Hysteresis	B _H		5		G


Output Behavior vs. Magnetic Polarity

Magnetic Polarity	Test Conditions	Output
South	$B > B_{OPS}$	High (On)
	$0 < B < B_{RPS}$	Low (Off)
North	$B < B_{OPN}$	High (On)
	$0 > B > B_{RPN}$	Low (Off)

Note: when power is turned on under zero magnetic field, the output is “Low”.

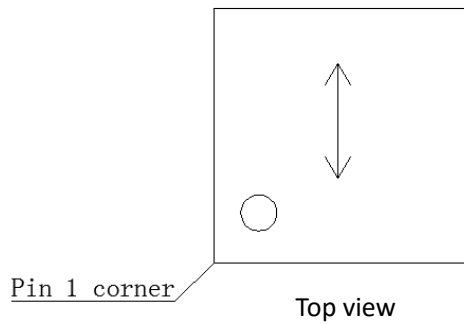

Sensing Direction of Magnetic Field

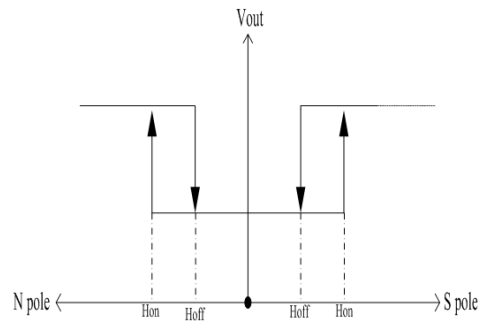


Magnetic Flux

Application Information

The output of the TMR1341XD switches high (turns on) when a magnetic field parallel to the sensor exceeds the operate point threshold $|B_{OPS}|$ or $|B_{OPN}|$. When the magnetic field is reduced below the release point $|B_{RPS}|$ or $|B_{RPN}|$, the device output goes low (turns off). The difference between the magnetic operate point and release point is the hysteresis B_H of the device.

It is strongly recommended that an external bypass capacitor be connected in close proximity to the device between the supply and ground to reduce noise. The typical value of the external capacitor is $0.1\mu F$.

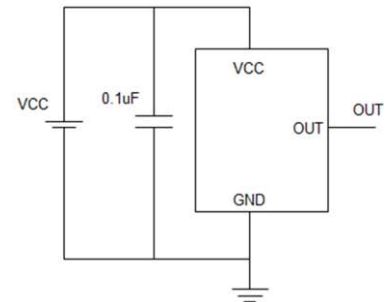

Package Information

DFN2x2x0.55-3L package drawing

PIN 1 DOT BY MARKING

TOP VIEW


PIN #1 IDENTIFICATION CHAMFER 0.25MM

BOTTOM VIEW

SIDE VIEW

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min	Nom	Max	Min	Nom	Max
A	0.50	0.55	0.60	0.020	0.022	0.024
A1	0.00	-	0.05	0.000	-	0.002
A3	0.15 REF			0.006 REF		
D	1.95	2.00	2.05	0.077	0.079	0.081
E	1.95	2.00	2.05	0.077	0.079	0.081
b	0.25	0.30	0.35	0.010	0.012	0.014
L	0.30	0.35	0.40	0.012	0.014	0.016
D2	1.35	1.50	1.60	0.053	0.059	0.063
E2	0.85	1.00	1.10	0.033	0.039	0.043
e	1.30 BSC			0.051 BSC		

MR Sensor Position

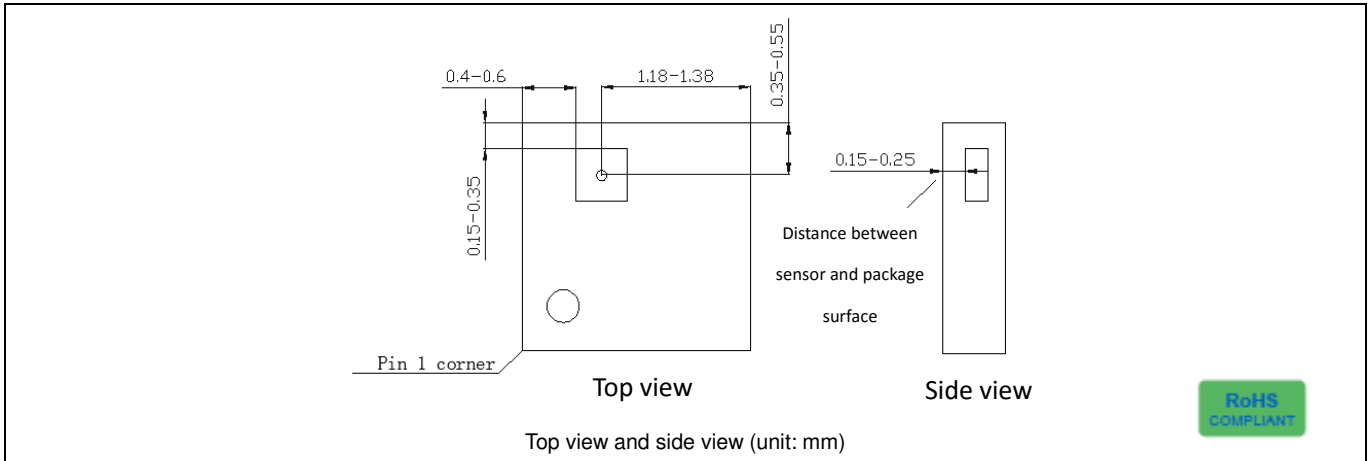

MultiDimension Technology Co., Ltd.

Address: No.7 Guangdong Road, Zhangjiagang Free Trade Zone, Jiangsu, 215634, China

Web: www.dowaytech.com/en

Email: info@dowaytech.com

The information provided herein by MultiDimension Technology Co., Ltd. (hereinafter MultiDimension) is believed to be accurate and reliable. Publication neither conveys nor implies any license under patent or other industrial or intellectual property rights. MultiDimension reserves the right to make changes to product specifications for the purpose of improving product quality, reliability, and functionality. MultiDimension does not assume any liability arising out of the application and use of its products. MultiDimension's customers using or selling this product for use in appliances, devices, or systems where malfunction can reasonably be expected to result in personal injury do so at their own risk and agree to fully indemnify MultiDimension for any damages resulting from such applications.