

SPECIFICATIONS CLA50Y2C

OUTLINES DIMENSIONS


Description

- *Round Type
- *T1-3/4 (5mm) Diameter
- *Lens Color: Water Clear
- *With Flange

Features

*Emitting Color: Yellow *High Luminous Intensity

*Technology: InGaAlP

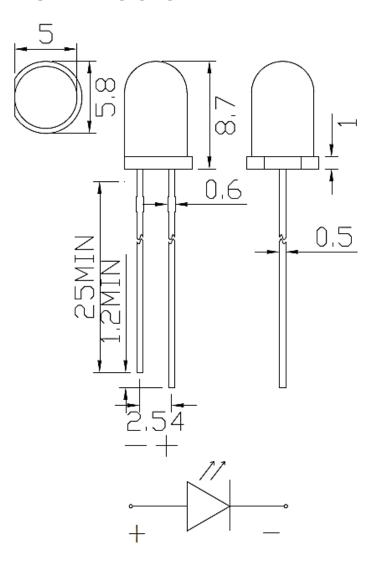

Notes:

- 1. All Dimensions are in millimeters (inches).
- 2. Tolerance is \pm 0.25mm (0.01") unless otherwise noted.
- 3. Specifications are subject to change without notice.

| Part Number | Chip Material | Color of Emission | Lens Type | Viewing Angle |
|-------------|---------------|-------------------|-------------|---------------|
| CLA50Y2C | InGaAlP | Yellow | Water Clear | 20° |



ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com



ABSOLUTE MAXIMUM RATINGS

(TA=25°C)

| Parameter | Symbol | Max Rating | Unit | |
|--|--------|------------|------|--|
| Power Dissipation | Pb | 66 | mW | |
| Pulse Current Forward Current | lFP | 60 | mA | |
| Continuous Forward Current | lF | 30 | mA | |
| Reverse Voltage | VR | 5 | V | |
| Operating Temperature Range | Topr | -25~+85 | °C | |
| Storage Temperature Range | Тѕтс | -30~+85 | °C | |
| IFP = Pulse Width ≤ 10 ms, Duty Ratio ≤1/10. Soldering Condition: 260 °C/ 5sec | | | | |

OPTICAL-ELECTRICAL CHARACTERISTICS

(TA=25°C)

| Doromotor | Symbol | Test Condition | Value | | | Lloit |
|-------------------------|--------|-----------------------|-------|------|-----|-------|
| Parameter | | | Min | Тур | Max | Unit |
| Luminous Intensity | lv | I _F = 20mA | 2000 | 3000 | - | mcd |
| Forward Voltage | VF | I⊧ = 20mA | - | 2.1 | 2.4 | V |
| Reverse Leakage Current | lR | V _R = 5V | - | - | 10 | μΑ |
| Viewing Angle | 201/2 | I⊧ = 20mA | - | 20 | - | deg |
| Dominant Wavelength | λD | I⊧ = 20mA | 588 | - | 593 | nm |


^{*}Tolerance of viewing angle: -10 / +5 deg.





ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com



OPTICAL CHARACTERISTIC CURVES







Relative Luminous Intensity vs. **Ambient Temperature** Luminous Intensity Ratio

20 40

Ambient Temperature (°C)

60



Main Wavelength Luminous Intensity Ratio 600 650 Dominant Wavelength (nm)

Relative Luminous Intensity vs.

Radiation Diagram 30

ChromeLED Corp. reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.chromeled.com



SOLDERING CONDITIONS – LAMP TYPE LED

- * Solder the LED no closer than 3mm from the base of the epoxy bulb. Soldering beyond the base of the tie bar is recommended.
- * Recommended soldering conditions

| <u> </u> | | | |
|-------------------------|--|--|--|
| Dip Soldering | | | |
| Pre-Heat | 100 °C Max | | |
| Pre-Heat Time | 60 Second Max | | |
| Solder Bath Temperature | 260 °C Max | | |
| Dippng Time | 5 Second Max | | |
| Dipping Position | No lower than 3mm from the base of the epoxy | | |

| Hand Soldering | | | | |
|--|--|--|--|--|
| | 3mm Series | Others | | |
| Temperature Soldering Time Position | 300 °C Max 3 Second Max No closer than 3mm from the base of the epoxy | 350 °C Max 3 Second Max No closer than 3mm from the base of the epoxy | | |

- * Do not apply any stress to the lead. Particularly when heated.
- * The LED must not be repositioned after soldering.
- * After soldering the LEDs, the epoxy bulb should be protected from mechanical shock or vibration until the LEDs return to room temperature.
- * Direct soldering onto a PC board should be avoided. Mechanical stress to the resin may be caused by the PC board warping or from the clinching and cutting of the leadframes. When it is absolutely necessary, the LEDs may be mounted in this fashion, but, the user will assume responsibility for any problems. Direct soldering should only be done after testing has confirmed that no damage, such as wire bond failure or resin deterioration, will occur. LEDs should not be soldered directly to double sided PC boards because the heat will deteriorate the epoxy resin.
- * When it is necessary to clamp the LEDs to prevent soldering failure, it is important to minimize the mechanical stress on the LEDs.
- * Cut the LED leadframes at room temperature. Cutting the leadframes at high temperature may cause LED failure.

