

# SAW filters for infrastructure systems

Series/Type: B3807

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product		Deadline Last Orders	Last Shipments
B39331B3807U310		2012-01-13	2012-12-31	2013-03-30

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.



SAW Components	B3807
Low-Loss Filter	326,4 MHz

**Data Sheet** 


#### **Features**

- Low-loss IF filter for W-CDMA base station
- Usable bandwidth 15 MHz
- Ceramic SMD package

#### **Terminals**

Gold plated

# Ceramic package QCC8C

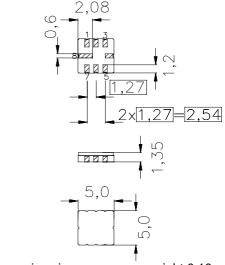


Dimensions in mm, approx. weight 0,10 g

## Pin configuration

7	Input
6	Input Ground
3	Output
2	Output Ground

1, 4, 5, 8 Ground



Туре	Ordering code	Marking and Package according to	Packing according to		
B3807	B39331-B3807-U310	C61157-A7-A56	F61074-V8070-Z000		

Electrostatic Sensitive Device (ESD)

## **Maximum ratings**

Operable temperature range	T	-40/ +85	°C
Storage temperature range	$T_{ m stg}$	-40/ +85	°C
DC voltage	$V_{\rm DC}$	0	V
Source power	$P_{\rm s}$	15	dBm



SAW Components B3807

Low-Loss Filter 326,4 MHz

**Data Sheet** 

Characteristics

Operating temperature:  $T = -10 ... +80 \degree C$ 

Terminating source impedance:  $Z_S$ =50  $\Omega$  and matching network Terminating load impedance:  $Z_S$ =50  $\Omega$  and matching network

		min.	typ.	max.	
Nominal frequency	f <sub>N</sub>	_	326,4	_	MHz
Minimum insertion attenuation		_	2,0	4,0	dB
Amplitude ripple (p-p)					
f <sub>N</sub> -2,5 MHzf <sub>N</sub> +2,5 MHz	z	_	0,3	0,5	dB
f <sub>N</sub> -7,5 MHzf <sub>N</sub> +7,5 MH:	z	_	1,0	3,0	dB
Pass bandwidth	B <sub>1.0dB</sub>				
$\alpha_{rel} \le 1,0 \text{ dB}$	1,002	_	15	_	MHz
	B <sub>10dB</sub>				
$lpha_{\text{rel}} \leq \ 10 \ \text{dB}$		_	20	_	MHz
Relative attenuation (relative to $\alpha_{min}$ )	$\alpha_{\rm rel}$				
10,0 MHz f <sub>N</sub> - 18,0 MHz		40	50	_	dB
f <sub>N</sub> -38,395 MHz f <sub>N</sub> -38,405 MHz	<u>:</u>	43	50	_	dB
f <sub>N</sub> –19,195 MHz f <sub>N</sub> –19,205 MHz	<u>:</u>	43	50	_	dB
f <sub>N</sub> - 18,0 MHz f <sub>N</sub> - 12,5 MHz		13	15	_	dB
f <sub>N</sub> + 12,5 MHz f <sub>N</sub> + 30,0 MHz		11	13	_	dB
f <sub>N</sub> + 30,0 MHz f <sub>N</sub> + 450,0 MHz		25	30	_	dB
Group delay ripple (p-p)	Δτ				
f <sub>N</sub> - 7,5 MHzf <sub>N</sub> - 2,5 MHz	<u>,</u>	_	90	110	ns
f <sub>N</sub> - 2,5 MHzf <sub>N</sub> +2,5 MHz		_	15	25	ns
f <sub>N</sub> +2,5 MHzf <sub>N</sub> +7,5 MHz		_	50	65	ns
Return Loss					
f <sub>N</sub> -2,5 MHzf <sub>N</sub> +2,5 MHz		10	11	_	dB
f <sub>N</sub> -7,0 MHzf <sub>N</sub> +7,0 MHz		8	10	_	dB
f <sub>N</sub> -7,5 MHzf <sub>N</sub> +7,5 MHz		5	8	_	dB
Impedance at f <sub>N</sub> (without matching) <sup>1</sup>					
Input: $Z_{IN} = R_{IN}    C_{IN}$		_	72    0,4	_	Ω    pF
Output: Z <sub>OUT</sub> = R <sub>OUT</sub>    C <sub>OUT</sub>		_	73    0,2	_	Ω    pF
Temperature coefficient of frequency	TC <sub>f</sub>		<b>-70</b>	_	ppm/K

<sup>&</sup>lt;sup>1</sup>(port extensions directly at filter)




SAW Components B3807

Low-Loss Filter 326,4 MHz

**Data Sheet** 

# Matching network to 50 $\boldsymbol{\Omega}$

(Element values depend upon PCB layout)

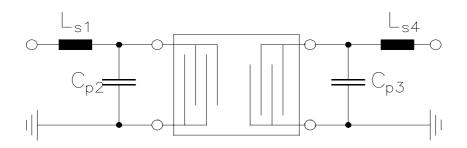

$$L_{s1} = 22 \text{ nH}$$
  
 $C_{p2} = 2.7 \text{ pF}$ 


$$C_{p3} = 2.7 \text{ pF}$$
  
 $L_{s4} = 22 \text{ nH}$ 




SAW Components B3807
Low-Loss Filter 326,4 MHz

**Data Sheet** 

## Normalized frequency response

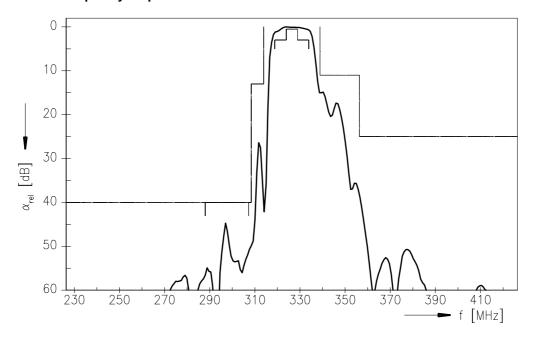

## Normalized frequency response (pass band)

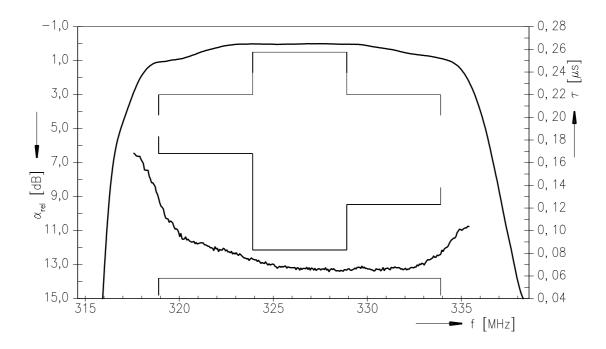



SAW Components B3807
Low-Loss Filter 326,4 MHz

**Data Sheet** 

#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC IS P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.