


## Micropower (60 $\mu$ A), wide bandwidth (2.4 MHz) CMOS op amps

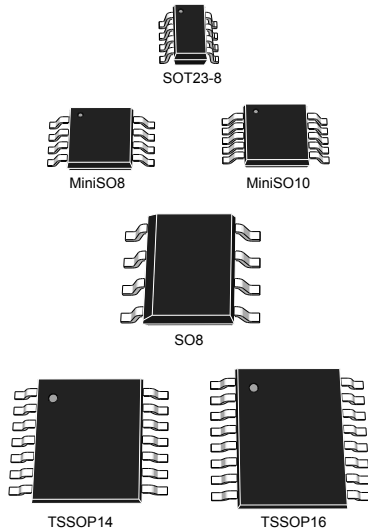

### Features

- Rail-to-rail input and output
- Low-power consumption: 60  $\mu$ A typ at 5 V
- Low supply voltage: 1.5 V - 5.5 V
- Gain bandwidth product: 2.4 MHz typ, stable for gain equal or above -3 or 4
- Low-power shutdown mode: 5 nA typ
- Low offset voltage: 800  $\mu$ V max (A version)
- Low input bias current: 1 pA typ
- EMI hardened operational amplifiers
- High tolerance to ESD: 4 kV HBM
- Extended temperature range: -40 °C to 125 °C

### Applications

- Battery-powered applications
- Portable devices
- Signal conditioning
- Active filtering
- Medical instrumentation

#### Maturity status link

[TSV6392](#), [TSV6393](#), [TSV6394](#), [TSV6395](#),  
[TSV6392A](#), [TSV6393A](#), [TSV6394A](#),  
[TSV6395A](#)

#### Device summary

| Reference | Dual version             |                          |
|-----------|--------------------------|--------------------------|
|           | Without standby          | With standby             |
| TSV639x   | <a href="#">TSV6392</a>  | <a href="#">TSV6393</a>  |
| TSV639xA  | <a href="#">TSV6392A</a> | <a href="#">TSV6393A</a> |

| Reference | Quad version             |                          |
|-----------|--------------------------|--------------------------|
|           | Without standby          | With standby             |
| TSV639x   | <a href="#">TSV6394</a>  | <a href="#">TSV6395</a>  |
| TSV639xA  | <a href="#">TSV6394A</a> | <a href="#">TSV6395A</a> |

### Description


The TSV639x series of dual and quad operational amplifiers (op amps) offers low voltage operation and rail-to-rail input and output.

For applications configured with gain, the TSV639x series offers an excellent speed/power consumption ratio, 2.4 MHz gain bandwidth product while consuming only 60  $\mu$ A at 5 V. The devices also feature an ultra-low input bias current and have a shutdown mode ([TSV6393](#), [TSV6395](#)).

These features make the TSV639x family ideal for sensor interfaces, battery supplied and portable applications, as well as active filtering.

# 1 Package pin connections

Figure 1. Pin connections for each package (top view)

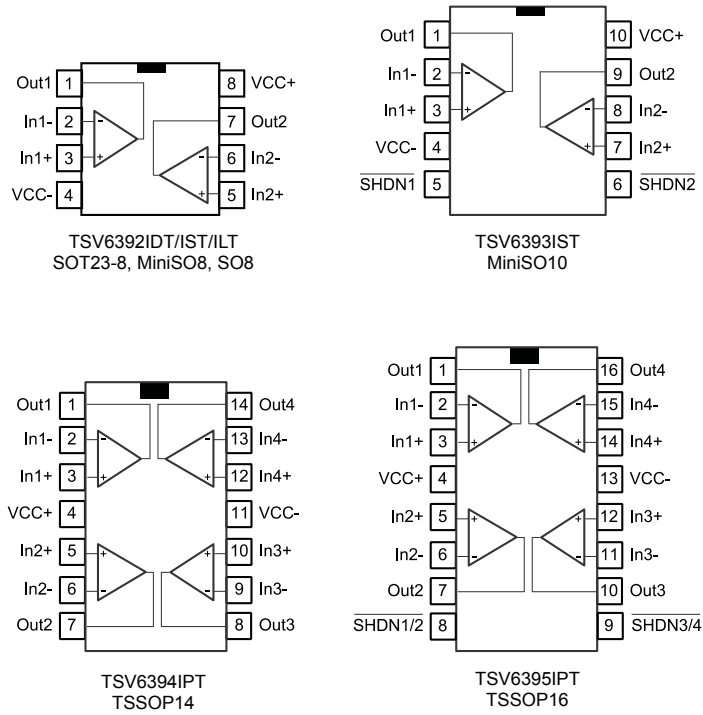

## 2 Absolute maximum ratings and operating conditions

**Table 1. Absolute maximum ratings (AMR)**

| Symbol            | Parameter   | Value  | Unit |      |
|-------------------|---|--|------|------|
| V <sub>CC</sub>   | Supply voltage <sup>(1)</sup>                             | 6  | V    |      |
| V <sub>id</sub>   | Differential input voltage <sup>(2)</sup>                 | ±V <sub>CC</sub>   |      |      |
| V <sub>in</sub>   | Input voltage <sup>(3)</sup>                              | (V <sub>CC</sub> <sup>-</sup> ) - 0.2 to (V <sub>CC</sub> <sup>+</sup> ) + 0.2 |      |      |
| I <sub>in</sub>   | Input current <sup>(4)</sup>                              | 10   | mA   |      |
| SHDN              | Shutdown voltage <sup>(3)</sup>                           | (V <sub>CC</sub> <sup>-</sup> ) - 0.2 to (V <sub>CC</sub> <sup>+</sup> ) + 0.2 | V    |      |
| T <sub>stg</sub>  | Storage temperature                                       | -65 to 150   | °C   |      |
| T <sub>j</sub>    | Maximum junction temperature                              | 150  |      |      |
| R <sub>thja</sub> | Thermal resistance junction to ambient <sup>(5) (6)</sup> | SOT23-8  | 105  | °C/W |
|                   |   | MiniSO8  | 190  |      |
|                   |   | MiniSO10   | 113  |      |
|                   |   | SO8  | 125  |      |
|                   |   | TSSOP14  | 100  |      |
|                   |   | TSSOP16  | 95   |      |
| ESD               | HBM: human body model <sup>(7)</sup>                      | 4  | kV   |      |
|                   | MM: machine model <sup>(8)</sup>                          | 300  | V    |      |
|                   | CDM: charged device model <sup>(9)</sup>                  | 1.5  | kV   |      |
|                   | Latch-up immunity   | 200  | mA   |      |

1. All voltage values, except the differential voltage are with respect to the network ground terminal.
2. Differential voltages are the non-inverting input terminal with respect to the inverting input terminal.
3. V<sub>CC</sub> - V<sub>in</sub> must not exceed 6 V, V<sub>in</sub> must not exceed 6 V.
4. The input current must be limited by a resistor in-series with the inputs.
5. R<sub>th</sub> are typical values.
6. Short-circuits can cause excessive heating and destructive dissipation.
7. Human body model: 100 pF discharged through a 1.5 kΩ resistor between two pins of the device, done for all couples of pin combinations with other pins floating.
8. Machine model: a 200 pF capacitor is charged to the specified voltage, then discharged directly between two pins of the device with no external series resistor (internal resistor < 5 Ω), done for all couples of pin combinations with other pins floating.
9. Charged device model: all pins plus package are charged together to the specified voltage and then discharged directly to the ground.

**Table 2. Operating conditions**

| Symbol            | Parameter                            | Value  | Unit |
|-------------------|--------------------------------------|--|------|
| V <sub>CC</sub>   | Supply voltage                       | 1.5 to 5.5   | V    |
| V <sub>icm</sub>  | Common-mode input voltage range      | (V <sub>CC</sub> <sup>-</sup> ) - 0.1 to (V <sub>CC</sub> <sup>+</sup> ) + 0.1 |      |
| T <sub>oper</sub> | Operating free-air temperature range | -40 to 125   | °C   |

### 3 Electrical characteristics

**Table 3. Electrical characteristics at  $V_{CC+} = 1.8\text{ V}$  with  $V_{CC-} = 0\text{ V}$ ,  $V_{icm} = V_{CC}/2$ ,  $T_{amb} = 25\text{ °C}$ , and  $R_L$  connected to  $V_{CC}/2$  (unless otherwise specified)**

| Symbol                | Parameter   | Conditions   | Min. | Typ. | Max.              | Unit                    |
|-----------------------|---|--|------|------|-------------------|-------------------------|
| <b>DC performance</b> |   |  |      |      |                   |                         |
| $V_{io}$              | Offset voltage  | TSV639x  |      |      | 3                 | mV                      |
|                       |   | TSV639xA   |      |      | 0.8               |                         |
|                       |   | TSV6393AIST (MiniSO10)   |      |      | 1                 |                         |
|                       |   | $T_{min} < T_{op} < T_{max}$ , TSV639x   |      |      | 4.5               |                         |
|                       |   | $T_{min} < T_{op} < T_{max}$ , TSV639xA  |      |      | 2                 |                         |
|                       |   | $T_{min} < T_{op} < T_{max}$ , TSV6393AIST   |      |      | 2.2               |                         |
| $DV_{io}$             | Input offset voltage drift  |  |      | 2    |                   | $\mu\text{V}/\text{°C}$ |
| $I_{io}$              | Input offset current, $V_{out} = V_{CC}/2$                            |  |      | 1    | 10 <sup>(1)</sup> | pA                      |
|                       |   | $T_{min} < T_{op} < T_{max}$   |      | 1    | 100               |                         |
| $I_{ib}$              | Input bias current, $V_{out} = V_{CC}/2$                              |  |      | 1    | 10 <sup>(1)</sup> | pA                      |
|                       |   | $T_{min} < T_{op} < T_{max}$   |      | 1    | 100               |                         |
| CMR                   | Common mode rejection ratio<br>$20 \log(\Delta V_{ic}/\Delta V_{io})$ | $0\text{ V}$ to $1.8\text{ V}$ , $V_{out} = 0.9\text{ V}$                                      | 53   | 74   |                   | dB                      |
|                       |   | $T_{min} < T_{op} < T_{max}$   | 51   |      |                   |                         |
| $A_{vd}$              | Large signal voltage gain   | $R_L = 10\text{ k}\Omega$ , $V_{out} = 0.5\text{ V}$ to $1.3\text{ V}$                         | 85   | 95   |                   | dB                      |
|                       |   | $T_{min} < T_{op} < T_{max}$   | 80   |      |                   |                         |
| $V_{OH}$              | High-level output voltage,<br>$V_{OH} = V_{CC} - V_{out}$             | $R_L = 10\text{ k}\Omega$  |      | 5    | 35                | mV                      |
|                       |   | $R_L = 10\text{ k}\Omega$ , $T_{min} < T_{op} < T_{max}$                                       |      |      | 50                |                         |
| $V_{OL}$              | Low-level output voltage  | $R_L = 10\text{ k}\Omega$  |      | 4    | 35                | mV                      |
|                       |   | $R_L = 10\text{ k}\Omega$ , $T_{min} < T_{op} < T_{max}$                                       |      |      | 50                |                         |
| $I_{out}$             | $I_{sink}$  | $V_o = 1.8\text{ V}$   | 6    | 12   |                   | mA                      |
|                       |   | $T_{min} < T_{op} < T_{max}$   | 4    |      |                   |                         |
|                       | $I_{source}$  | $V_o = 0\text{ V}$   | 6    | 10   |                   |                         |
|                       |   | $T_{min} < T_{op} < T_{max}$   | 4    |      |                   |                         |
| $I_{CC}$              | Supply current (per operator)   | No load, $V_{out} = V_{CC}/2$  | 40   | 50   | 60                | $\mu\text{A}$           |
|                       |   | $T_{min} < T_{op} < T_{max}$   |      |      | 62                |                         |
| <b>AC performance</b> |   |  |      |      |                   |                         |
| GBP                   | Gain bandwidth product  | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$  |      | 2    |                   | MHz                     |
| Gain                  | Minimum gain for stability  | Phase margin = $60^\circ$ , $R_f = 10\text{ k}\Omega$ ,  |      | 4    |                   | V/V                     |
|                       |   | $R_L = 10\text{ k}\Omega$ , $C_L = 20\text{ pF}$   |      | -3   |                   |                         |
| SR                    | Slew rate   | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $V_{out} = 0.5\text{ V}$ to $1.3\text{ V}$ |      | 0.7  |                   | V/ $\mu\text{s}$        |
| $e_n$                 | Equivalent input noise voltage  | $f = 1\text{ kHz}$   |      | 60   |                   | nV/ $\sqrt{\text{Hz}}$  |
|                       |   | $f = 10\text{ kHz}$  |      | 33   |                   |                         |

1. Guaranteed by design.

**Table 4. Shutdown characteristics  $V_{CC} = 1.8\text{ V}$** 

| Symbol                | Parameter                                       | Conditions  | Min. | Typ. | Max. | Unit |
|-----------------------|---|---|------|------|------|------|
| <b>DC performance</b> |   |   |      |      |      |      |
| $I_{CC}$              | Supply current in shutdown mode (all operators) | $SHDN = V_{CC}^-$   |      | 2.5  | 50   | nA   |
|                       |   | $T_{min} < T_{op} < 85\text{ }^\circ\text{C}$   |      |      | 200  |      |
|                       |   | $T_{min} < T_{op} < 125\text{ }^\circ\text{C}$  |      |      |      | 1.5  |
| $t_{on}$              | Amplifier turn-on time                          | $R_L = 2\text{ k}\Omega$ , $V_{out} = (V_{CC}^-)$ to $(V_{CC}^-) + 0.2\text{ V}$                |      | 200  |      | ns   |
| $t_{off}$             | Amplifier turn-off time                         | $R_L = 2\text{ k}\Omega$ , $V_{out} = (V_{CC}^+) - 0.5\text{ V}$ to $(V_{CC}^+) - 0.7\text{ V}$ |      | 20   |      |      |
| $V_{IH}$              | SHDN logic high                                 |   | 1.35 |      |      | V    |
| $V_{IL}$              | SHDN logic low                                  |   |      |      | 0.6  |      |
| $I_{IH}$              | SHDN current high                               | $SHDN = V_{CC}^+$   |      | 10   |      | pA   |
| $I_{IL}$              | SHDN current low                                | $SHDN = V_{CC}^-$   |      | 10   |      |      |
| $I_{OLeak}$           | Output leakage in shutdown mode                 | $SHDN = V_{CC}^-$   |      | 50   |      |      |
|                       |   | $T_{min} < T_{op} < 125\text{ }^\circ\text{C}$  |      | 1    |      | nA   |

**Table 5. Electrical characteristics at  $V_{CC+} = 3.3\text{ V}$ ,  $V_{CC-} = 0\text{ V}$ ,  $V_{icm} = V_{CC}/2$ ,  $T_{amb} = 25\text{ °C}$ ,  $R_L$  connected to  $V_{CC}/2$  (unless otherwise specified)**

| Symbol                | Parameter  | Conditions  | Min. | Typ. | Max.              | Unit                    |
|-----------------------|--|---|------|------|-------------------|-------------------------|
| <b>DC performance</b> |  |   |      |      |                   |                         |
| $V_{io}$              | Offset voltage   | TSV639x   |      |      | 3                 | mV                      |
|                       |  | TSV639xA  |      |      | 0.8               |                         |
|                       |  | TSV6393AIST (MiniSO10)  |      |      | 1                 |                         |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV639x  |      |      | 4.5               |                         |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV639xA   |      |      | 2                 |                         |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV6393AIST  |      |      | 2.2               |                         |
| $DV_{io}$             | Input offset voltage drift   |   |      | 2    |                   | $\mu\text{V}/\text{°C}$ |
| $I_{io}$              | Input offset current   |   |      | 1    | 10 <sup>(1)</sup> | pA                      |
|                       |  | $T_{min} < T_{op} < T_{max}$  |      | 1    | 100               |                         |
| $I_{ib}$              | Input bias current   |   |      | 1    | 10 <sup>(1)</sup> | pA                      |
|                       |  | $T_{min} < T_{op} < T_{max}$  |      | 1    | 100               |                         |
| CMR                   | Common mode rejection ratio<br>$20 \log (\Delta V_{ic}/\Delta V_{io})$ | $0\text{ V to }3.3\text{ V}$ , $V_{out} = 1.65\text{ V}$  | 57   | 79   |                   | dB                      |
|                       |  | $T_{min} < T_{op} < T_{max}$  | 53   |      |                   |                         |
| $A_{vd}$              | Large signal voltage gain  | $R_L = 10\text{ k}\Omega$ , $V_{out} = 0.5\text{ V to }2.8\text{ V}$  | 88   | 98   |                   | dB                      |
|                       |  | $T_{min} < T_{op} < T_{max}$  | 83   |      |                   |                         |
| $V_{OH}$              | High-level output voltage,<br>$V_{OH} = V_{CC} - V_{out}$              | $R_L = 10\text{ k}\Omega$   |      | 6    | 35                | mV                      |
|                       |  | $R_L = 10\text{ k}\Omega$ , $T_{mi.} < T_{op} < T_{max}$  |      |      | 50                |                         |
| $V_{OL}$              | Low-level output voltage   | $R_L = 10\text{ k}\Omega$   |      | 7    | 35                | mV                      |
|                       |  | $R_L = 10\text{ k}\Omega$ , $T_{min} < T_{op} < T_{max}$  |      |      | 50                |                         |
| $I_{out}$             | $I_{sink}$   | $V_o = 3.3\text{ V}$  | 23   | 45   |                   | mA                      |
|                       |  | $T_{min} < T_{op} < T_{max}$  | 20   |      |                   |                         |
|                       | $I_{source}$   | $V_o = 0\text{ V}$  | 23   | 38   |                   |                         |
|                       |  | $T_{min} < T_{op} < T_{max}$  | 20   |      |                   |                         |
| $I_{CC}$              | Supply current (per operator)  | No load, $V_{out} = 1.75\text{ V}$  | 43   | 55   | 64                | $\mu\text{A}$           |
|                       |  | $T_{min} < T_{op} < T_{max}$  |      |      | 66                |                         |
| <b>AC performance</b> |  |   |      |      |                   |                         |
| GBP                   | Gain bandwidth product   | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$   |      | 2.2  |                   | MHz                     |
| Gain                  | Minimum gain for stability   | Phase margin = $60^\circ$ , $R_f = 10\text{ k}\Omega$ ,<br>$R_L = 10\text{ k}\Omega$ , $C_L = 20\text{ pF}$ |      | 4    |                   | V/V                     |
|                       |  |   |      | -3   |                   |                         |
| SR                    | Slew rate  | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$ , $V_{out} = 0.5\text{ V to }2.8\text{ V}$                |      | 0.9  |                   | V/ $\mu\text{s}$        |

1. Guaranteed by design.

**Table 6. Electrical characteristics at  $V_{CC+} = 5\text{ V}$  with  $V_{CC-} = 0\text{ V}$ ,  $V_{icm} = V_{CC}/2$ ,  $T_{amb} = 25\text{ }^{\circ}\text{C}$ , and  $R_L$  connected to  $V_{CC}/2$  (unless otherwise specified)**

| Symbol                | Parameter  | Conditions   | Min. | Typ. | Max.              | Unit                           |
|-----------------------|--|--|------|------|-------------------|--------------------------------|
| <b>DC performance</b> |  |  |      |      |                   |                                |
| $V_{io}$              | Offset voltages  | TSV639x  |      |      | 3                 | mV                             |
|                       |  | TSV639xA   |      |      | 0.8               |                                |
|                       |  | TSV6393AIST (MiniSO10)   |      |      | 1                 |                                |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV639x                               |      |      | 4.5               |                                |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV639xA                              |      |      | 2                 |                                |
|                       |  | $T_{min} < T_{op} < T_{max}$ , TSV6393AIST                           |      |      | 2.2               |                                |
| $DV_{io}$             | Input offset voltage drift   |  |      | 2    |                   | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_{io}$              | Input offset current, $V_{out} = V_{CC}/2$                               |  |      | 1    | 10 <sup>(1)</sup> | pA                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   |      | 1    | 100               |                                |
| $I_{ib}$              | Input bias current, $V_{out} = V_{CC}/2$                                 |  |      | 1    | 10 <sup>(1)</sup> | pA                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   |      | 1    | 100               |                                |
| CMR                   | Common mode rejection ratio<br>$20 \log(\Delta V_{ic}/\Delta V_{io})$    | 0 V to 5 V, $V_{out} = 2.5\text{ V}$                                 | 60   | 80   |                   | dB                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   | 55   |      |                   |                                |
| SVR                   | Supply voltage rejection ratio<br>$20 \log(\Delta V_{CC}/\Delta V_{io})$ | $V_{CC} = 1.8\text{ to }5\text{ V}$                                  | 75   | 93   |                   | dB                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   | 73   |      |                   |                                |
| $A_{vd}$              | Large signal voltage gain  | $R_L = 10\text{ k}\Omega$ , $V_{out} = 0.5\text{ V to }4.5\text{ V}$ | 89   | 98   |                   | dB                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   | 84   |      |                   |                                |
| EMIRR                 | EMI rejection ratio, EMIRR =<br>$-20 \log(V_{RFpeak}/\Delta V_{io})$     | $V_{RF} = 100\text{ mV}_{rms}$ , $f = 400\text{ MHz}$                |      | 61   |                   | dB                             |
|                       |  | $V_{RF} = 100\text{ mV}_{rms}$ , $f = 900\text{ MHz}$                |      | 85   |                   |                                |
|                       |  | $V_{RF} = 100\text{ mV}_{rms}$ , $f = 1800\text{ MHz}$               |      | 92   |                   |                                |
|                       |  | $V_{RF} = 100\text{ mV}_{rms}$ , $f = 2400\text{ MHz}$               |      | 83   |                   |                                |
| $V_{OH}$              | High-level output voltage,<br>$V_{OH} = V_{CC} - V_{out}$                | $R_L = 10\text{ k}\Omega$  |      | 7    | 35                | mV                             |
|                       |  | $R_L = 10\text{ k}\Omega$ , $T_{min} < T_{op} < T_{max}$             |      |      | 50                |                                |
| $V_{OL}$              | Low-level output voltage   | $R_L = 10\text{ k}\Omega$  |      | 6    | 35                | mV                             |
|                       |  | $R_L = 10\text{ k}\Omega$ , $T_{min} < T_{op} < T_{max}$             |      |      | 50                |                                |
| $I_{out}$             | $I_{sink}$   | $V_o = 5\text{ V}$   | 40   | 65   |                   | mA                             |
|                       |  | $T_{min} < T_{op} < T_{max}$   | 35   |      |                   |                                |
|                       | $I_{source}$   | $V_o = 0\text{ V}$   | 40   | 72   |                   |                                |
|                       |  | $T_{min} < T_{op} < T_{max}$   | 35   |      |                   |                                |
| $I_{CC}$              | Supply current (per operator)  | No load, $V_{out} = V_{CC}/2$  | 50   | 60   | 69                | $\mu\text{A}$                  |
|                       |  | $T_{min} < T_{op} < T_{max}$   |      |      | 72                |                                |
| <b>AC performance</b> |  |  |      |      |                   |                                |
| GBP                   | Gain bandwidth product   | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                    |      | 2.4  |                   | MHz                            |
| Gain                  | Minimum gain for stability   | Phase margin = $60^{\circ}$ , $R_f = 10\text{ k}\Omega$ ,            |      | 4    |                   | V/V                            |
|                       |  | $R_L = 10\text{ k}\Omega$ , $C_L = 20\text{ pF}$                     |      | -3   |                   |                                |
| SR                    | Slew rate  | $R_L = 10\text{ k}\Omega$ , $C_L = 100\text{ pF}$                    |      | 1.1  |                   | V/ $\mu\text{s}$               |

| Symbol | Parameter                         | Conditions  | Min. | Typ.  | Max. | Unit                         |
|--------|-----------------------------------|---|------|-------|------|------------------------------|
| $e_n$  | Equivalent input noise voltage    | $f = 1 \text{ kHz}$   |      | 60    |      | $\text{nV}/\sqrt{\text{Hz}}$ |
|        |                                   | $f = 10 \text{ kHz}$  |      | 33    |      |                              |
| THD+N  | Total harmonic distortion + noise | $V_{CC} = 5 \text{ V}$ , $f_{in} = 1 \text{ kHz}$ , $A_{CL} = -10$ ,<br>$R_L = 100 \text{ k}\Omega$ , $V_{icm} = V_{CC}/2$ ,<br>$BW = 22 \text{ kHz}$ , $V_{out} = 1 V_{rms}$ |      | 0.015 |      | %                            |

1. Guaranteed by design.


**Table 7. Shutdown characteristics at  $V_{CC} = 5 \text{ V}$**

| Symbol         | Parameter                                       | Conditions  | Min. | Typ. | Max. | Unit |
|----------------|---|---|------|------|------|------|
| DC performance |   |   |      |      |      |      |
| $I_{CC}$       | Supply current in shutdown mode (all operators) | $\overline{\text{SHDN}} = V_{CC^-}$   |      | 5    | 50   | nA   |
|                |   | $T_{min} < T_{op} < 85 \text{ }^\circ\text{C}$  |      |      | 200  |      |
|                |   | $T_{min} < T_{op} < 125 \text{ }^\circ\text{C}$   |      |      |      | 1.5  |
| $t_{on}$       | Amplifier turn-on time                          | $R_L = 2 \text{ k}\Omega$ , $V_{out} = (V_{CC^-}) \text{ V to } (V_{CC^-}) + 0.2 \text{ V}$       |      | 200  |      | ns   |
| $t_{off}$      | Amplifier turn-off time                         | $R_L = 2 \text{ k}\Omega$ , $V_{out} = (V_{CC^+}) - 0.5 \text{ V to } (V_{CC^+}) - 0.7 \text{ V}$ |      | 20   |      |      |
| $V_{IH}$       | $\overline{\text{SHDN}}$ logic high             |   | 2    |      |      | V    |
| $V_{IL}$       | $\overline{\text{SHDN}}$ logic low              |   |      |      | 0.8  | V    |
| $I_{IH}$       | $\overline{\text{SHDN}}$ current high           | $\overline{\text{SHDN}} = V_{CC^+}$   |      | 10   |      | pA   |
| $I_{IL}$       | $\overline{\text{SHDN}}$ current low            | $\overline{\text{SHDN}} = V_{CC^-}$   |      | 10   |      |      |
| $I_{OLeak}$    | Output leakage in shutdown mode                 | $\overline{\text{SHDN}} = V_{CC^-}$   |      | 50   |      |      |
|                |   | $T_{min} < T_{op} < 125 \text{ }^\circ\text{C}$   |      | 1    |      | nA   |




## 4 Electrical characteristic curves


**Figure 2. Supply current vs. supply voltage at  $V_{icm} = V_{CC}/2$**

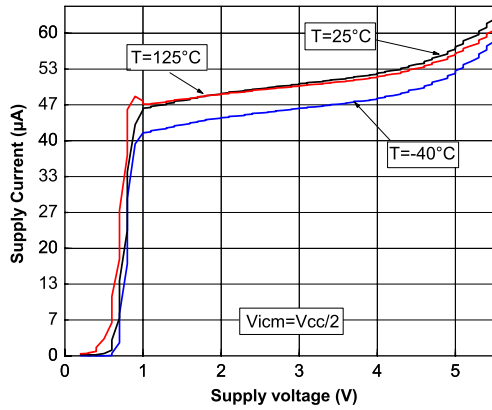


**Figure 3. Output current vs. output voltage at  $V_{CC} = 1.5 V$**

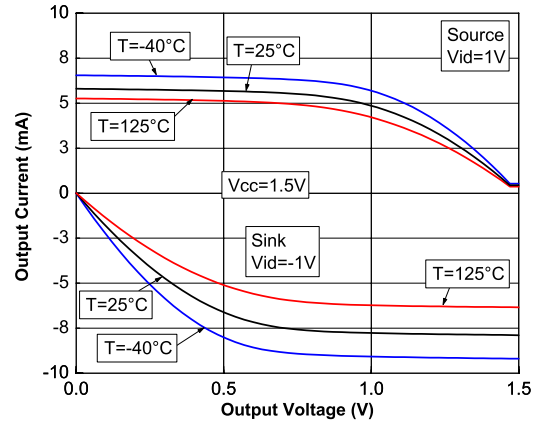


**Figure 4. Output current vs. output voltage at  $V_{CC} = 5 V$**

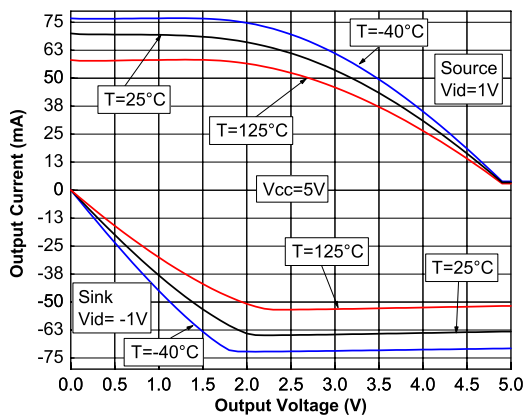

**Figure 5. Closed loop response for gain = -10, at  $V_{CC} = 1.5 V$  and  $V_{CC} = 5 V$**

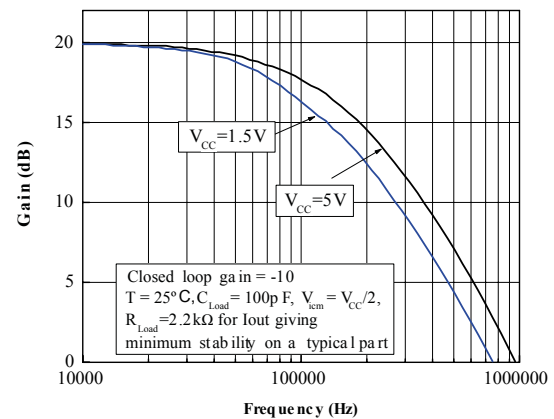

**Figure 6. Closed loop response for gain = -3 at  $V_{CC} = 1.5 V$**

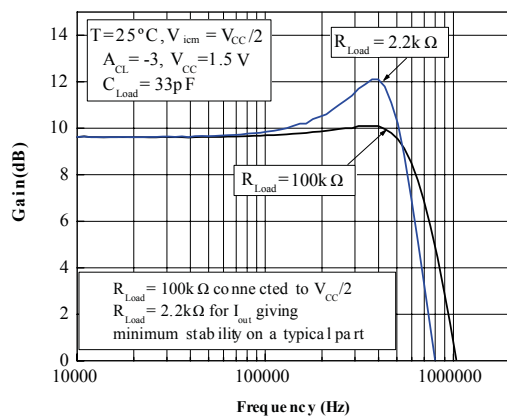

**Figure 7. Closed loop response for gain = -3 at  $V_{CC} = 5 V$**

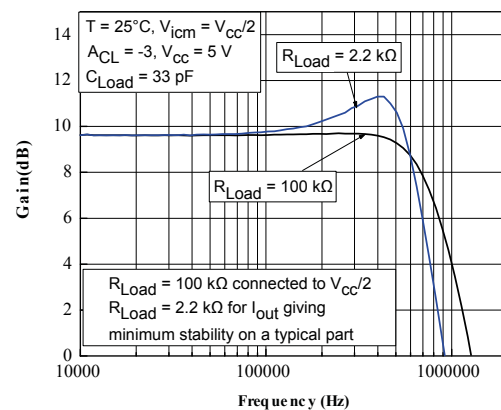


Figure 8. Positive slew rate vs. supply voltage in closed loop

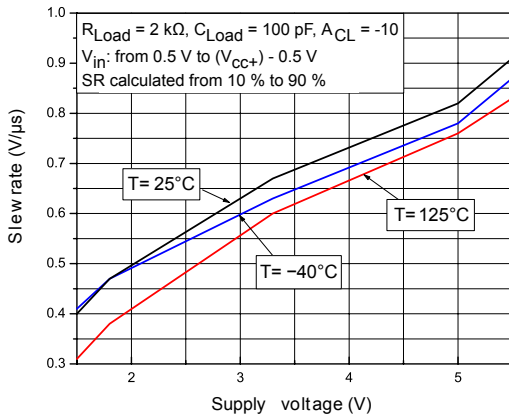


Figure 9. Negative slew rate vs. supply voltage in closed loop

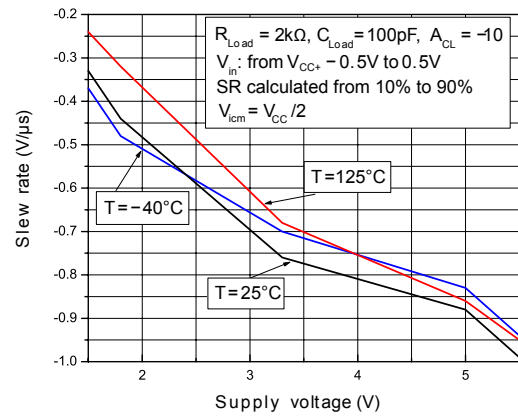


Figure 10. Slew rate vs. supply voltage in open loop

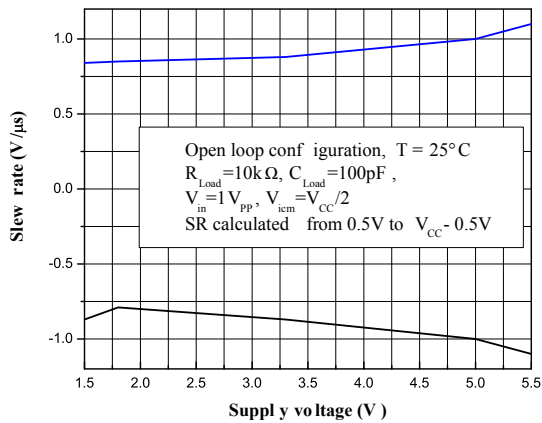


Figure 11. Slew rate timing in open loop

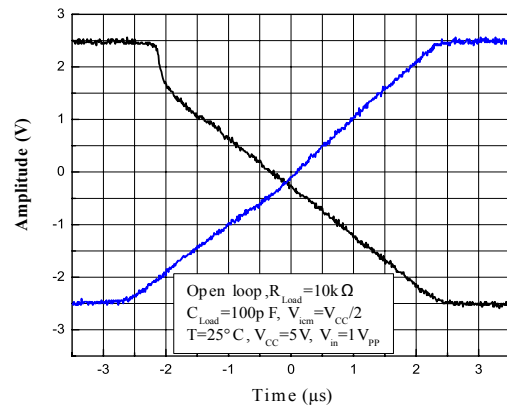


Figure 12. Slew rate timing in closed loop

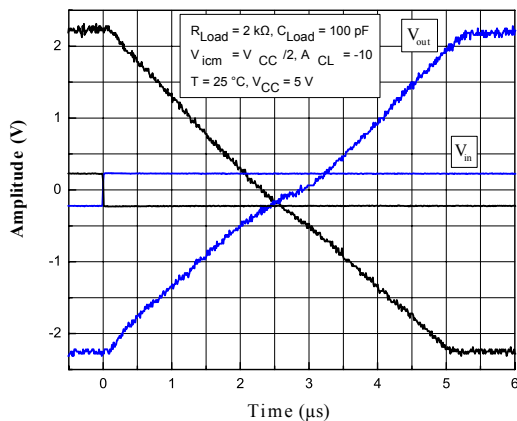


Figure 13. Noise vs. frequency

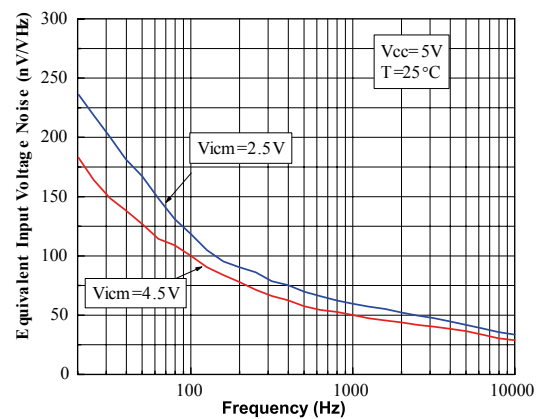


Figure 14. Distortion and noise vs. output voltage at  $V_{CC} = 1.8\text{ V}$

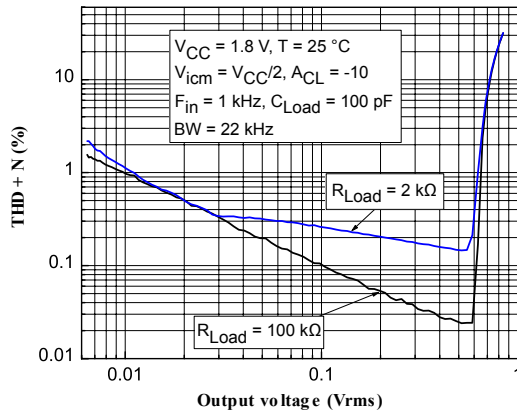


Figure 15. Distortion and noise vs. frequency at  $V_{CC} = 1.8\text{ V}$

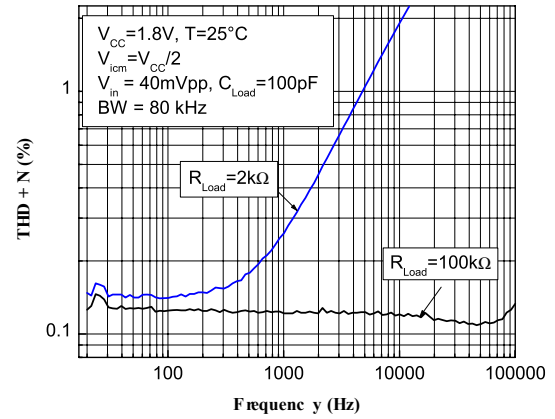


Figure 16. Distortion and noise vs. output voltage at  $V_{CC} = 5\text{ V}$

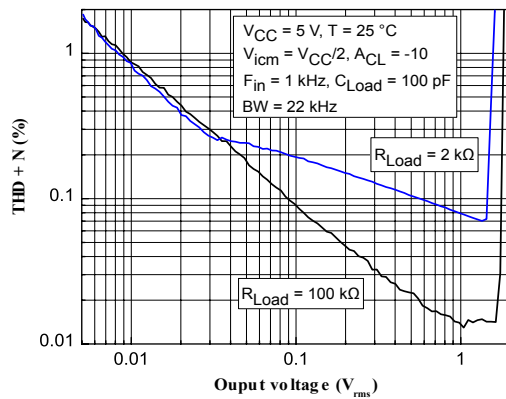


Figure 17. Distortion and noise vs. frequency at  $V_{CC} = 5\text{ V}$


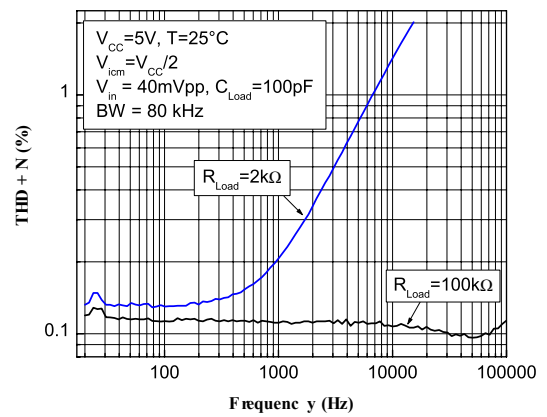


Figure 18. EMIRR vs. frequency at  $V_{CC} = 5\text{ V}, T = 25^\circ\text{C}$

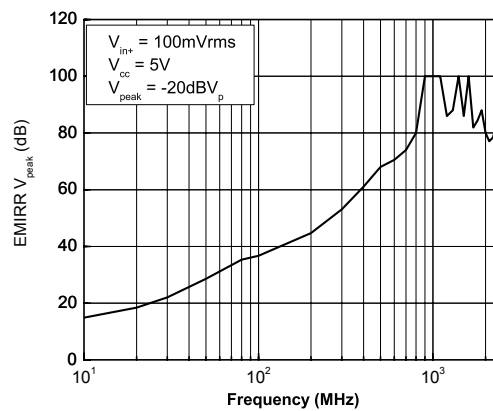

## 5 Application information

### 5.1 Operating voltages

The TSV639x can operate from 1.5 to 5.5 V. Their parameters are fully specified for 1.8, 3.3 and 5 V power supplies. However, the parameters are very stable in the full  $V_{CC}$  range and several characterization curves show the TSV639x characteristics at 1.5 V. Additionally, the main specifications are guaranteed in extended temperature ranges from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

### 5.2 Rail-to-rail input

The TSV639x are built with two complementary PMOS and NMOS input differential pairs. The devices have a rail-to-rail input, and the input common mode range is extended from  $(V_{CC-}) - 0.1\text{ V}$  to  $(V_{CC+}) + 0.1\text{ V}$ . The transition between the two pairs appears at  $(V_{CC+}) - 0.7\text{ V}$ . In the transition region, the performance of CMR, SVR,  $V_{io}$  (Figure 19 and Figure 20) and THD is slightly degraded.

Figure 19. Input offset voltage vs input common-mode at  $V_{CC} = 1.5\text{ V}$


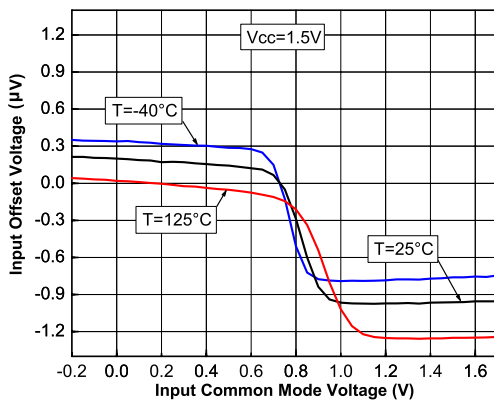


Figure 20. Input offset voltage vs input common-mode at  $V_{CC} = 5\text{ V}$

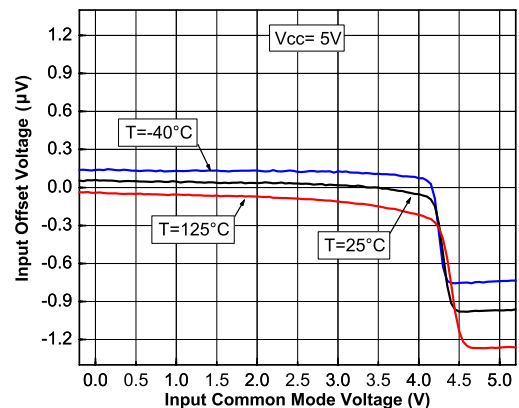

The devices are guaranteed without phase reversal.

### 5.3 Rail-to-rail output

The operational amplifiers' output levels can go close to the rails: 35 mV maximum above and below the rail when connected to a 10 k $\Omega$  resistive load to  $V_{CC}/2$ .

### 5.4 Shutdown function (TSV6393 - TSV6395)

The operational amplifiers are enabled when the SHDN pin is pulled high. To disable the amplifiers, the SHDN must be pulled down to  $V_{CC-}$ . When in shutdown mode, the amplifiers' output is in a high impedance state. The SHDN pin must never be left floating but tied to  $V_{CC+}$  or  $V_{CC-}$ .

The turn-on and turn-off times are calculated for an output variation of 200 mV (Figure 21 and Figure 22 show the test configurations).

Figure 21. Test configuration for turn-on time (Vout pulled down)

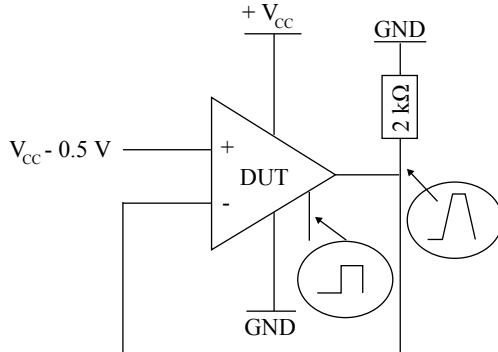


Figure 22. Test configuration for turn-off time (Vout pulled down)

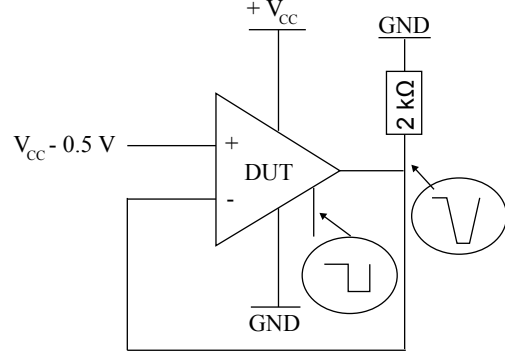


Figure 23. Turn-on time,  $V_{CC} = 5\text{ V}$ , Vout pulled down,  $T = 25^\circ\text{C}$


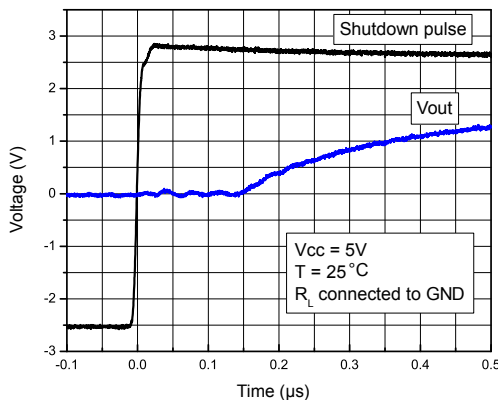


Figure 24. Turn-off time,  $V_{CC} = 5\text{ V}$ , Vout pulled down,  $T = 25^\circ\text{C}$

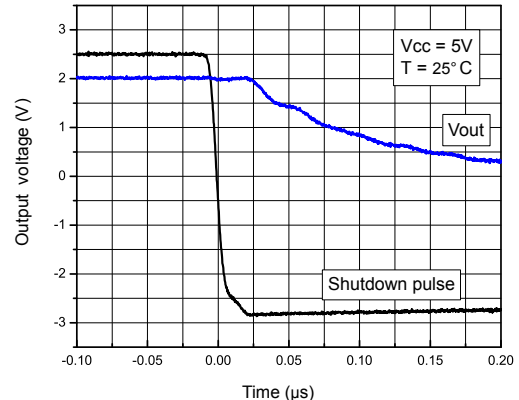

## 5.5 Optimization of DC and AC parameters

These devices use an innovative approach to reduce the spread of the main DC and AC parameters. An internal adjustment achieves a very narrow spread of the current consumption (60  $\mu\text{A}$  typical, min/max at  $\pm 17\%$ ). Parameters linked to the current consumption value, such as GBP, SR and  $A_{vd}$ , benefit from this narrow dispersion.

## 5.6 Driving resistive and capacitive loads

These products are micropower, low-voltage operational amplifiers optimized to drive rather large resistive loads, above 2 k $\Omega$ . For lower resistive loads, the THD level may significantly increase.

The amplifiers have a relatively low internal compensation capacitor, making them very fast while consuming very little. They are ideal when used in a non-inverting configuration or in an inverting configuration in the following conditions.

- $I_{\text{Gain}} \geq 3$  in an inverting configuration ( $C_L = 20\text{ pF}$ ,  $R_L = 100\text{ k}\Omega$ ) or  $I_{\text{gain}} \geq 10$  ( $C_L = 100\text{ pF}$ ,  $R_L = 100\text{ k}\Omega$ )
- $\text{Gain} \geq 4$  in a non-inverting configuration ( $C_L = 20\text{ pF}$ ,  $R_L = 100\text{ k}\Omega$ ) or  $\text{gain} \geq 11$  ( $C_L = 100\text{ pF}$ ,  $R_L = 100\text{ k}\Omega$ )

As these operational amplifiers are not unity gain stable, for a low closed-loop gain, it is recommended to use the TSV63x (60  $\mu\text{A}$ , 880 kHz) which is unity gain stable.

**Table 8. Related products**

| Part #         | I <sub>cc</sub> (μA) at 5 V | GBP (MHz) | SR (V/μs) | Minimum gain for stability<br>(C <sub>Load</sub> = 100 pF) |
|----------------|-----------------------------|-----------|-----------|--|
| TSV62-2-3-4-5  | 29                          | 0.42      | 0.14      | 1  |
| TSV629-2-3-4-5 | 29                          | 1.3       | 0.5       | 11   |
| TSV63-2-3-4-5  | 60                          | 0.88      | 0.34      | 1  |
| TSV639-2-3-4-5 | 60                          | 2.4       | 1.1       | 11   |

## 5.7 PCB layouts

For correct operation, it is advised to add 10 nF decoupling capacitors as close as possible to the power supply pins.

## 5.8 Macromodel

Two accurate macromodels (with or without shutdown feature) of the TSV639x are available on STMicroelectronics web site at [www.st.com](http://www.st.com). This model is a trade-off between accuracy and complexity (that is, time simulation) of the TSV639x operational amplifiers. It emulates the nominal performances of a typical device within the specified operating conditions mentioned in the datasheet. It also helps to validate a design approach and to select the right operational amplifier, but it does not replace on-board measurements.

## 6 Package information

---

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

## 6.1 SOT23-8 package information

Figure 25. SOT23-8 package outline

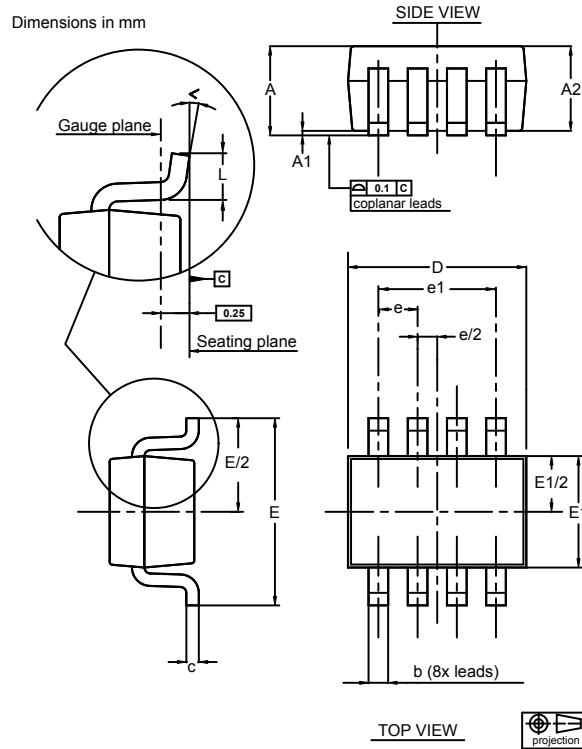



Table 9. SOT23-8 mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.45 |        |       | 0.057 |
| A1   |             |      | 0.15 |        |       | 0.006 |
| A2   | 0.90        |      | 1.30 | 0.035  |       | 0.051 |
| b    | 0.22        |      | 0.38 | 0.009  |       | 0.015 |
| c    | 0.08        |      | 0.22 | 0.003  |       | 0.009 |
| D    | 2.80        |      | 3.00 | 0.110  |       | 0.118 |
| E    | 2.60        |      | 3.00 | 0.102  |       | 0.118 |
| E1   | 1.50        |      | 1.75 | 0.059  |       | 0.069 |
| e    |             | 0.65 |      |        | 0.026 |       |
| e1   |             | 1.95 |      |        | 0.077 |       |
| L    | 0.30        |      | 0.60 | 0.012  |       | 0.024 |
| <    | 0°          |      | 8°   | 0°     |       | 8°    |



## 6.2 MiniSO8 package information

**Figure 26. MiniSO8 package outline**

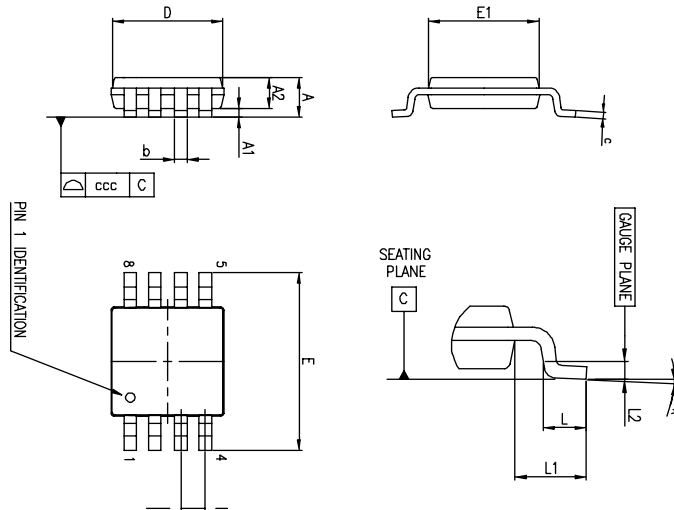

**Table 10. MiniSO8 package mechanical data**

| Ref. | Dimensions  |      |      |        |       |        |
|------|-------------|------|------|--------|-------|--------|
|      | Millimeters |      |      | Inches |       |        |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.   |
| A    |             |      | 1.1  |        |       | 0.043  |
| A1   | 0           |      | 0.15 | 0      |       | 0.0006 |
| A2   | 0.75        | 0.85 | 0.95 | 0.030  | 0.033 | 0.037  |
| b    | 0.22        |      | 0.40 | 0.009  |       | 0.016  |
| c    | 0.08        |      | 0.23 | 0.003  |       | 0.009  |
| D    | 2.80        | 3.00 | 3.20 | 0.11   | 0.118 | 0.126  |
| E    | 4.65        | 4.90 | 5.15 | 0.183  | 0.193 | 0.203  |
| E1   | 2.80        | 3.00 | 3.10 | 0.11   | 0.118 | 0.122  |
| e    |             | 0.65 |      |        | 0.026 |        |
| L    | 0.40        | 0.60 | 0.80 | 0.016  | 0.024 | 0.031  |
| L1   |             | 0.95 |      |        | 0.037 |        |
| L2   |             | 0.25 |      |        | 0.010 |        |
| k    | 0°          |      | 8°   | 0°     |       | 8°     |
| ccc  |             |      | 0.10 |        |       | 0.004  |

### 6.3 MiniSO10 package information

Figure 27. MiniSO10 package outline

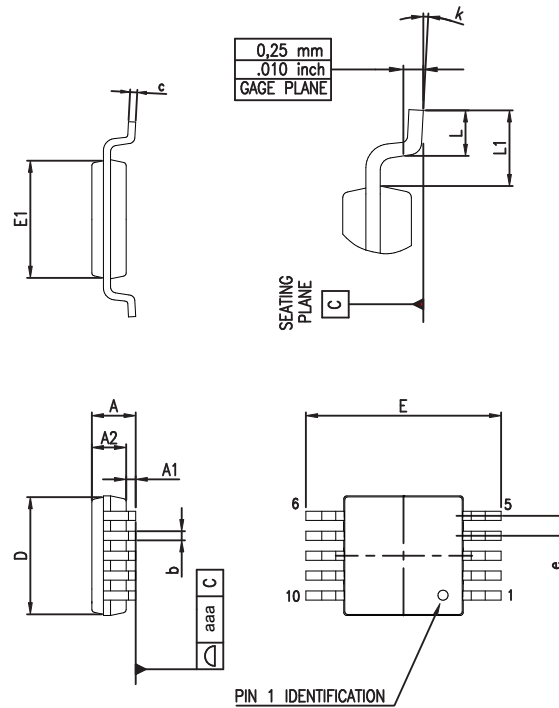


Table 11. MiniSO10 mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.10 |        |       | 0.043 |
| A1   | 0.05        | 0.10 | 0.15 | 0.002  | 0.004 | 0.006 |
| A2   | 0.78        | 0.86 | 0.94 | 0.031  | 0.034 | 0.037 |
| b    | 0.15        | 0.23 | 0.30 | 0.006  | 0.009 | 0.012 |
| c    | 0.13        | 0.18 | 0.23 | 0.005  | 0.007 | 0.009 |
| D    | 2.90        | 3.00 | 3.10 | 0.114  | 0.118 | 0.122 |
| E    | 4.75        | 4.90 | 5.05 | 0.187  | 0.193 | 0.199 |
| E1   | 2.90        | 3.00 | 3.10 | 0.114  | 0.118 | 0.122 |
| e    |             | 0.50 |      |        | 0.020 |       |
| L    | 0.40        | 0.55 | 0.70 | 0.016  | 0.022 | 0.028 |
| L1   |             | 0.95 |      |        | 0.037 |       |
| k    | 0°          | 3°   | 6°   | 0°     | 3°    | 6°    |
| aaa  |             |      | 0.10 |        |       | 0.004 |

## 6.4 SO8 package information

Figure 28. SO8 package outline

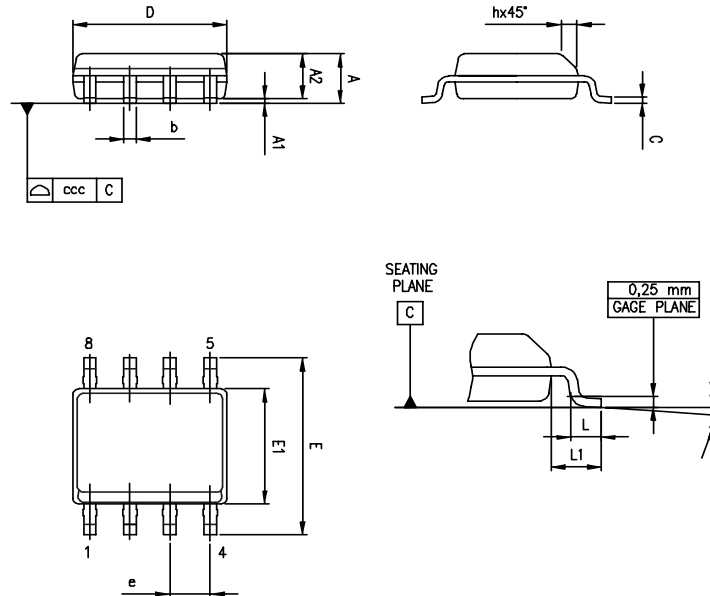


Table 12. SO8 package mechanical data

| Ref. | Dimensions  |      |      |        |       |       |
|------|-------------|------|------|--------|-------|-------|
|      | Millimeters |      |      | Inches |       |       |
|      | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A    |             |      | 1.75 |        |       | 0.069 |
| A1   | 0.10        |      | 0.25 | 0.004  |       | 0.010 |
| A2   | 1.25        |      |      | 0.049  |       |       |
| b    | 0.28        |      | 0.48 | 0.011  |       | 0.019 |
| c    | 0.17        |      | 0.23 | 0.007  |       | 0.010 |
| D    | 4.80        | 4.90 | 5.00 | 0.189  | 0.193 | 0.197 |
| E    | 5.80        | 6.00 | 6.20 | 0.228  | 0.236 | 0.244 |
| E1   | 3.80        | 3.90 | 4.00 | 0.150  | 0.154 | 0.157 |
| e    |             | 1.27 |      |        | 0.050 |       |
| h    | 0.25        |      | 0.50 | 0.010  |       | 0.020 |
| L    | 0.40        |      | 1.27 | 0.016  |       | 0.050 |
| L1   |             | 1.04 |      |        | 0.040 |       |
| k    | 0°          |      | 8°   | 0°     |       | 8°    |
| ccc  |             |      | 0.10 |        |       | 0.004 |

## 6.5 TSSOP-14 package information

Figure 29. TSSOP-14 package outline


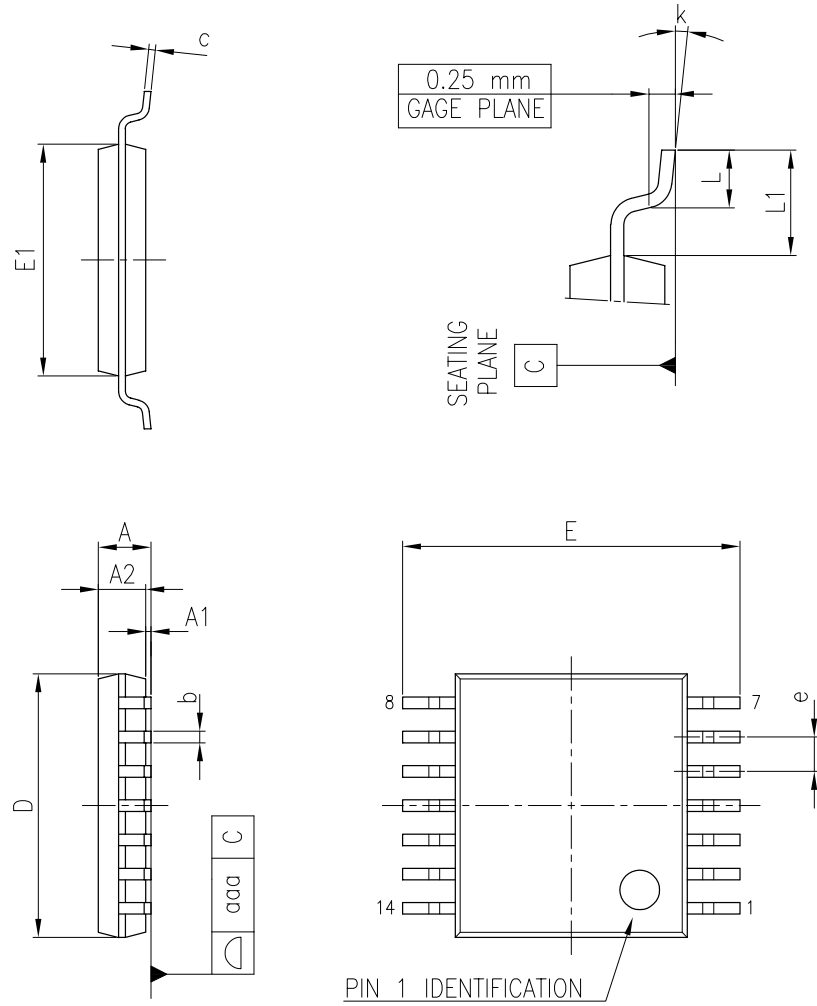


Table 13. TSSOP-14 package mechanical data

| Dim. | Dimension   |      |      |          |       |       |
|------|-------------|------|------|----------|-------|-------|
|      | Millimeters |      |      | Inches   |       |       |
|      | Min.        | Typ. | Max. | Min.     | Typ.  | Max.  |
| A    |             |      | 1.20 |          |       | 0.047 |
| A1   | 0.05        |      | 0.15 | 0.002    |       | 0.006 |
| A2   | 0.80        | 1.00 | 1.05 | 0.031    | 0.039 | 0.041 |
| b    | 0.19        |      | 0.30 | 0.007    |       | 0.012 |
| c    | 0.09        |      | 0.20 | 0.004    |       | 0.008 |
| D    | 4.90        | 5.00 | 5.10 | 0.193    | 0.197 | 0.201 |
| E    | 6.20        | 6.40 | 6.60 | 0.244    | 0.252 | 0.260 |
| E1   | 4.30        | 4.40 | 4.50 | 0.169    | 0.173 | 0.177 |
| e    | 0.65 BSC    |      |      | 0.25 BSC |       |       |
| L    | 0.45        | 0.60 | 0.75 | 0.018    | 0.024 | 0.030 |
| L1   |             | 1.00 |      |          | 0.039 |       |
| k    | 8° (max)    |      |      |          |       |       |
| aaa  |             |      | 0.10 |          |       | 0.004 |

Figure 30. TSSOP-14 recommended footprint

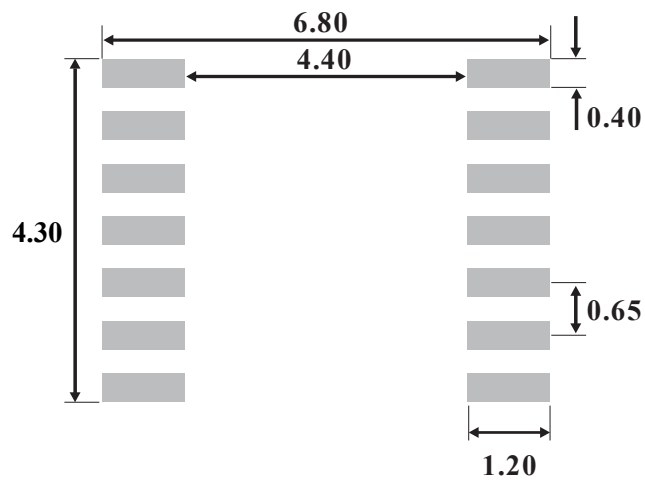

## 6.6 TSSOP16 package information

Figure 31. TSSOP16 package outline

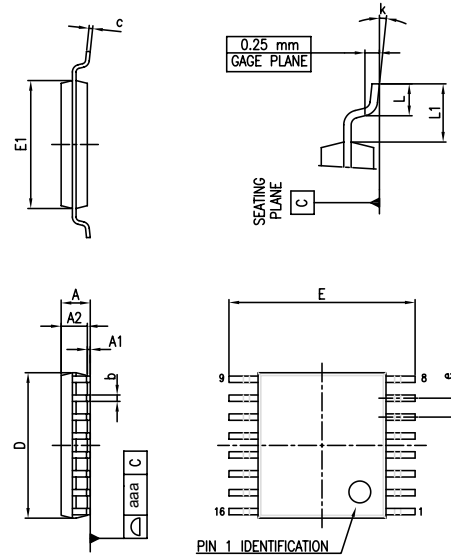


Table 14. TSSOP16 mechanical data

| Ref | Dimensions  |      |      |        |       |       |
|-----|-------------|------|------|--------|-------|-------|
|     | Millimeters |      |      | Inches |       |       |
|     | Min         | Typ  | Max  | Min    | Typ   | Max   |
| A   |             |      | 1.20 |        |       | 0.047 |
| A1  | 0.05        |      | 0.15 | 0.002  |       | 0.006 |
| A2  | 0.80        | 1.00 | 1.05 | 0.031  | 0.039 | 0.041 |
| b   | 0.19        |      | 0.30 | 0.007  |       | 0.012 |
| c   | 0.09        |      | 0.20 | 0.004  |       | 0.008 |
| D   | 4.90        | 5.00 | 5.10 | 0.193  | 0.197 | 0.201 |
| E   | 6.20        | 6.40 | 6.60 | 0.244  | 0.252 | 0.260 |
| E1  | 4.30        | 4.40 | 4.50 | 0.169  | 0.173 | 0.177 |
| e   |             | 0.65 |      |        | 0.026 |       |
| k   | 0°          |      | 8°   | 0°     |       | 8°    |
| L   | 0.45        | 0.60 | 0.75 | 0.018  | 0.024 | 0.030 |
| L1  |             | 1.00 |      |        | 0.039 |       |
| aaa |             |      | 0.10 |        |       | 0.004 |

## 7 Ordering information

**Table 15. Order codes**

| Order code  | Temperature range | Package  | Packing       | Marking |
|-------------|-------------------|----------|---------------|---------|
| TSV6392IDT  | -40 °C to 125 °C  | SO8      | Tape and reel | V6392I  |
| TSV6392AIDT |                   |          |               | V632AI  |
| TSV6392IST  |                   | MiniSO8  |               | K111    |
| TSV6392AIST |                   |          |               | K146    |
| TSV6392ILT  |                   | SOT23-8  |               | K111    |
| TSV6393IST  |                   | MiniSO10 |               | K110    |
| TSV6393AIST |                   |          |               | K145    |
| TSV6394IPT  |                   | TSSOP14  |               | V6394I  |
| TSV6394AIPT |                   |          |               | V6394AI |
| TSV6395IPT  |                   | TSSOP16  |               | V6395I  |
| TSV6395AIPT |                   |          |               | V6395AI |

## Revision history

**Table 16. Document revision history**

| Date        | Revision | Changes  |
|-------------|----------|--|
| 18-Jan-2010 | 1        | Initial release  |
| 29-Feb-2016 | 2        | Updated layout<br>Table 4, Table 6, and Table 7: for VOH, added $VOH = VCC - V_{out}$ to the parameter column; moved the values in the "min" column to the "max" column.<br>Table 10: "SOT23-8 mechanical data": added angle information to "Inches" columns.<br>Table 16: "Order codes": removed obsolete order codes TSV6392ID and TSV6392AID. |
| 01-Jun-2023 | 3        | Updated TSV6393IST marking in <a href="#">Table 15</a> .   |



**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2023 STMicroelectronics – All rights reserved