

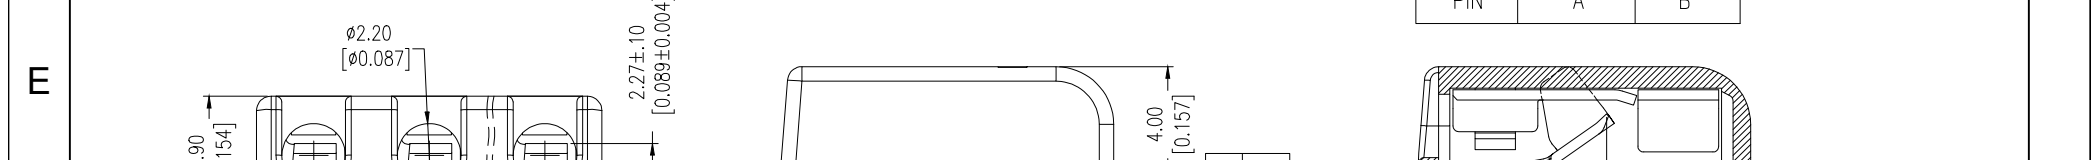
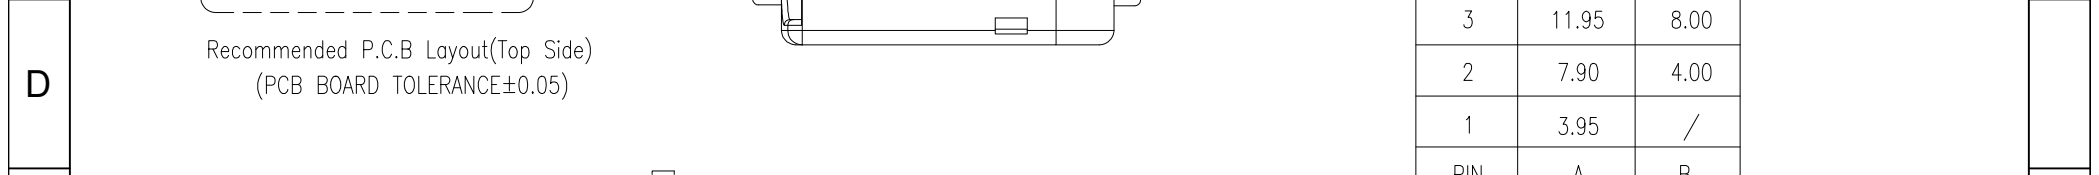
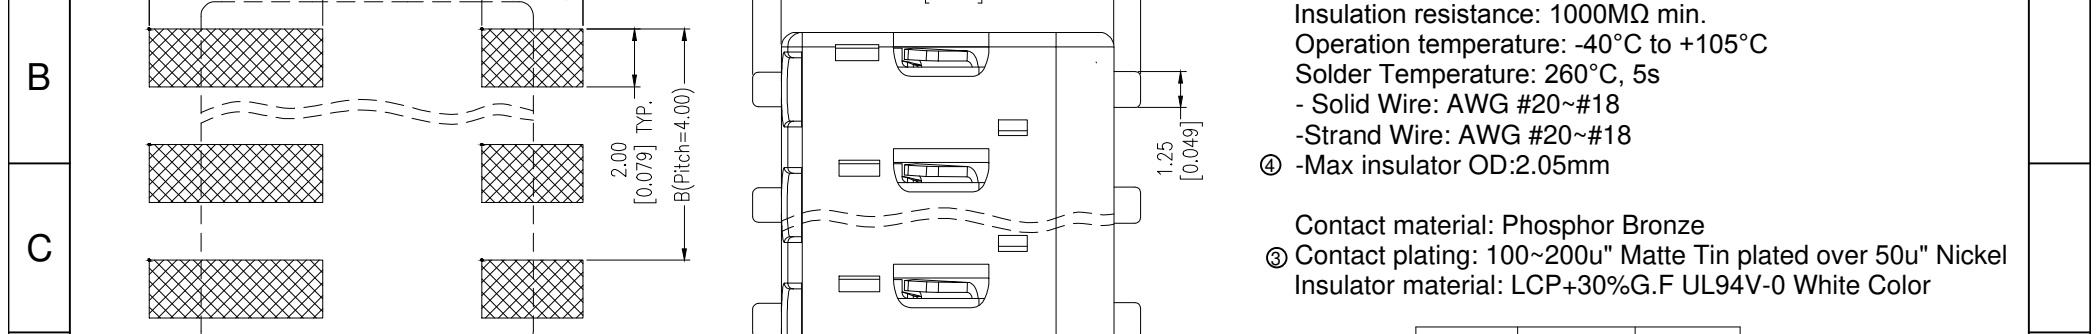


	1	2	3	4	5	6	7	
--	---	---	---	---	---	---	---	--

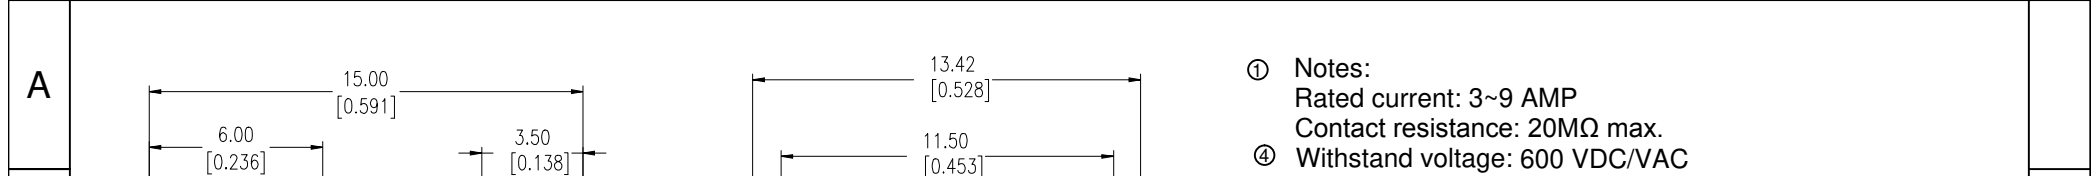


- ① Notes:  
 Rated current: 3~9 AMP  
 Contact resistance: 20MΩ max.  
 ④ Withstand voltage: 600 VDC/VAC  
 Insulation resistance: 1000MΩ min.  
 Operation temperature: -40°C to +105°C  
 Solder Temperature: 260°C, 5s  
 - Solid Wire: AWG #20~#18  
 - Strand Wire: AWG #20~#18  
 ④ -Max insulator OD:2.05mm
- Contact material: Phosphor Bronze  
 ③ Contact plating: 100~200u" Matte Tin plated over 50u" Nickel  
 Insulator material: LCP+30%G.F UL94V-0 White Color

3	11.95	8.00
2	7.90	4.00
1	3.95	/
PIN	A	B

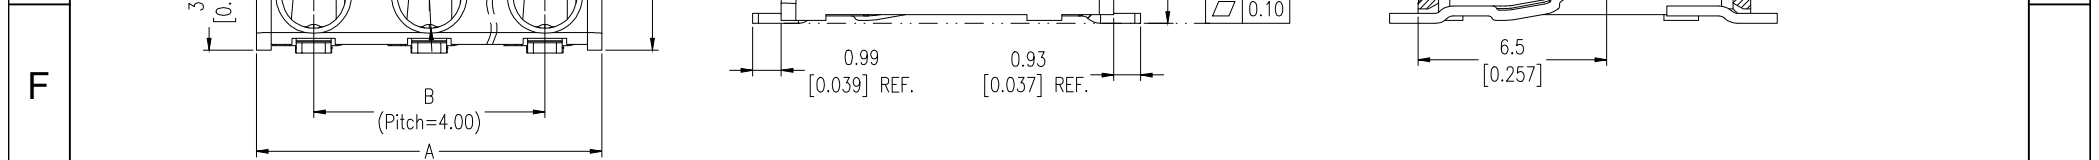

**RoHS compliant**  
Unit: mm



Scale	Free					Date	Name	Customer-No.
TOLERANCE		④	Update	21.06.2019	Winnie	Drawn	28.01.2016	Ray
.X	±0.40	④	Add the color of insulator	11.04.2018	Winnie	Approved	21.06.2019	Winnie
.XX	±0.25	③	Add the UL File No.	27.07.2017	Winnie			
.XXX	±0.15	②	Add the UL File No.	27.07.2017	Winnie			
DIM	TOL	①	Update note	17.08.2016	Ray			
Angle	±1.5°	①	Update note	17.08.2016	Ray			
		①	Drawn	28.01.2016	Ray			
		①	Id.	Modification	Date	Name		



Drawing-No.	ASS 7121 CO	rev04
Replace		Sheet

	1	2	3	4	5	6	7	SV4060
--	---	---	---	---	---	---	---	--------