

**Description: 1005 5GNR-n77 Band Pass Filter**
**PART NUMBER: BPF1005LRPKR3750L**
**Features:**

- Compact size : 1.0x0.5x0.38mm
- RoHS compliant

**Applications:**

- WWAN
- 5GNR-n77

**ELECTRICAL SPECIFICATIONS**

Item	Frequency Range(MHz)	Min.	Typ.	Max.
Insertion Loss (dB)	3300~4200	-	1.60	1.80
Insertion Loss (dB) at -40~85°C	3300~4200	-	-	2.30
Return Loss (dB)	3300~4200	15	21.0	-
Attenuation (dB)	600~1610	40	42.6	-
	1710~1785	38	48.0	-
	1780~1860	48	54.0	-
	1805~2200	30	39.5	-
	2300~2620	25	36.1	-
	2620~2690	20	33.8	-
	5150~5850	20	22.5	-
	5850~6600	20	22.7	-
	6600~7600	25	27.1	-
	7600~8400	20	36.6	-
	9900~12600	10	26.8	-
13200~18000	10 (Ref.)	15.0	-	

Operating Temperature Range : -40~85°C

Power Capacity : 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

 Pulse Worldwide Headquarters  
 15255 Innovation Drive #100  
 San Diego, CA 92128  
 USA  
 Tel:1-858-674-8100

 Pulse/Larsen Antennas  
 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
 Vancouver, WA 98683  
 USA  
 Tel: 1-360-944-7551

 Europe Headquarters  
 Pulse GmbH & Do, KG  
 Zeppelinstrasse 15  
 Herrenberg, Germany  
 Tel: 49 7032 7806 0


 Pulse (Suzhou) Wireless Products Co, Inc.  
 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase  
 Suzhou New District  
 Jiangsu Province, Suzhou 215009 PR China  
 Tel: 86 512 6807 9998


Description: 1005 5G NR-n77 Band Pass Filter

PART NUMBER: BPF1005LRPKR3750L

MECHANICAL DIMENSION

Outline

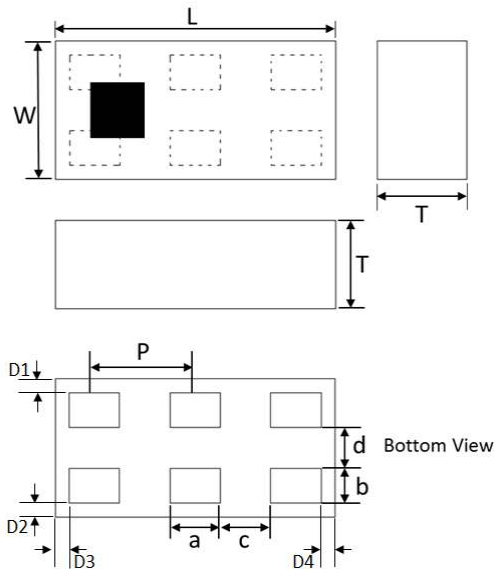


Termination

Terminal name	Function
P1	NC
P2	GND
P3	NC
P4	Output
P5	GND
P6	Input



Mechanical

	Dimension
L (mm)	1.00±0.05
W (mm)	0.50±0.05
T (mm)	0.38(Max.)
a (mm)	0.18±0.05
b (mm)	0.125±0.05
c (mm)	0.18±0.05
d (mm)	0.15±0.05
e (mm)	0.36±0.05
D1-D2 (mm)	0±0.04
D3-D4 (mm)	0±0.04

Top View

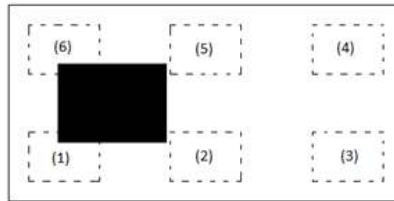

Reference design of EVB

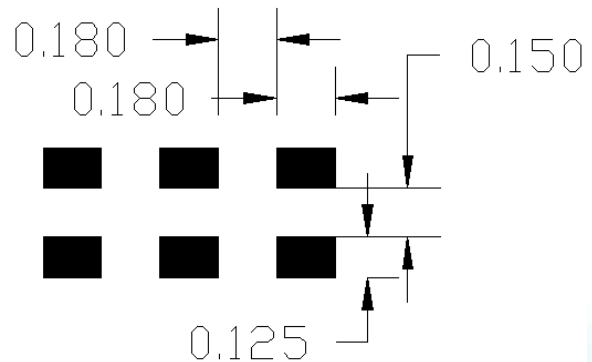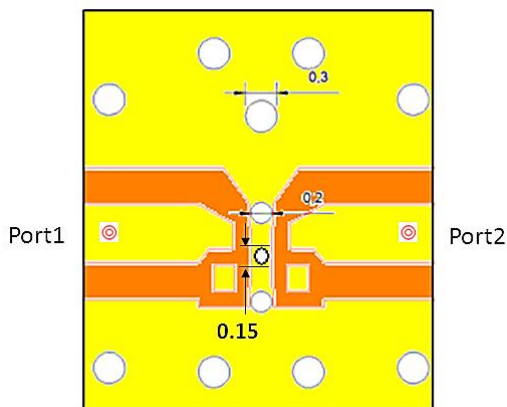

Unit : mm

⊙ Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.


In the effort to improve our products, we reserve the right to make changes judged to be necessary.  
CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description:** 1005 5GNR-n77 Band Pass Filter


**PART NUMBER:** BPF1005LRPKR3750L

**MEASURING DIAGRAM**

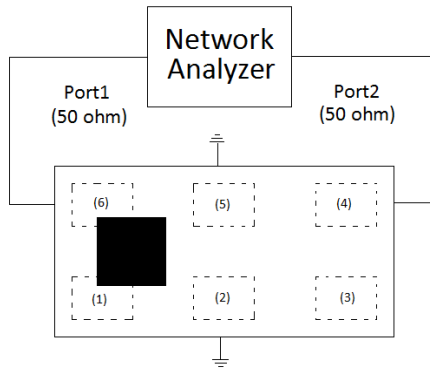

Test Instrument :  
Agilent E5071C Network Analyzer or equivalent.

**ELECTRICAL PERFORMANCES**

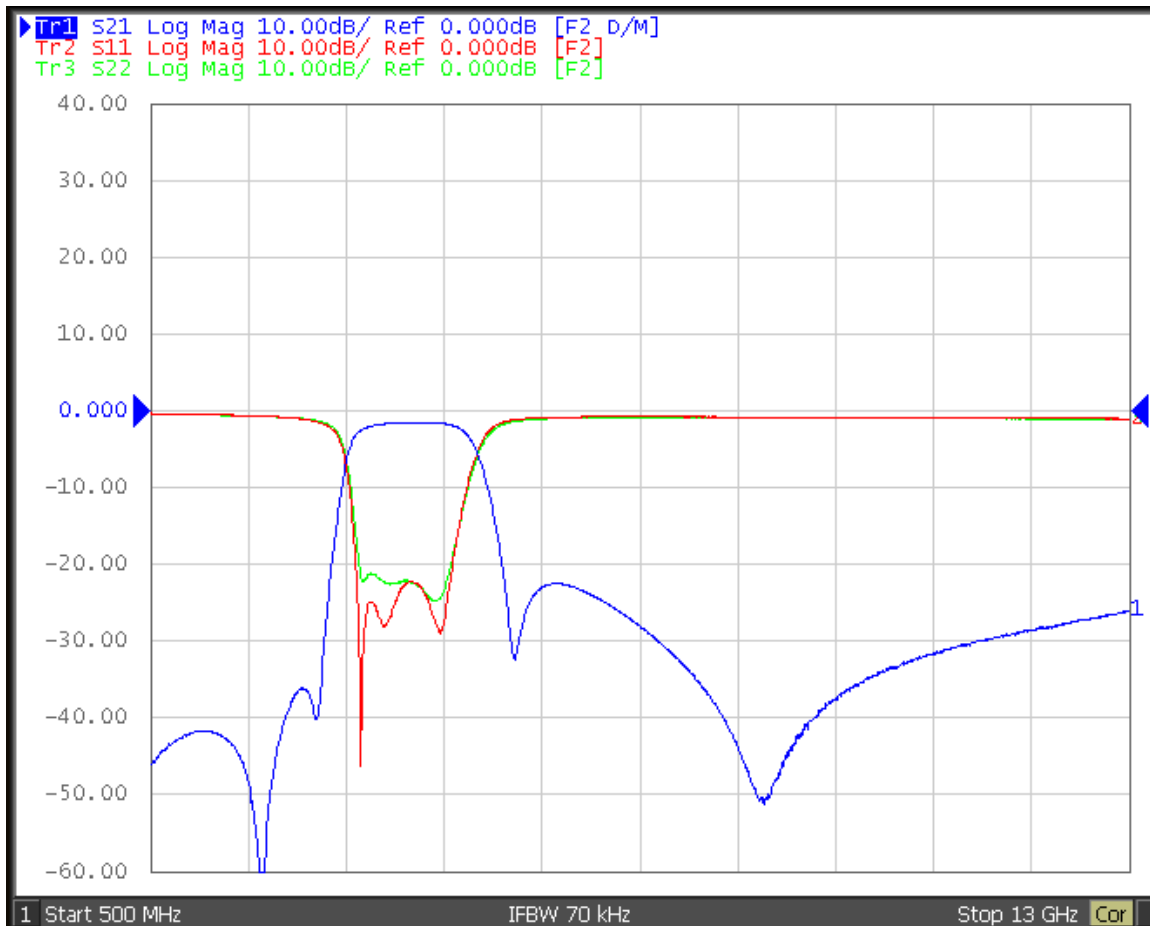

In the effort to improve our products, we reserve the right to make changes judged to be necessary.  
CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description:** 1005 5G NR-n77 Band Pass Filter**PART NUMBER:** BPF1005LRPKR3750L**REVISION HISTORY**

Revision	Date	Description
Version 1	Jul. 14, 2022	- New issue
Version 2	Aug. 11, 2022	- Update electrical requirements.