







- Plastic housing with class II design
- · Built-in active PFC function
- · Class 2 power unit
- Standby power consumption < 0.5W
- · IP67 rating for indoor or outdoor installations
- Function: 3 in 1 dimming (dim-to-off)
- Typical lifetime >50000hours
- 5 years warranty

Applications

- LED panel lighting
- · LED downlight

SELV IP67 C CANUS (for 12V,24V only) C TUBELL C CBCE CH

- · LED decorative lighting
- · LED tunnel lighting
- Moving sign
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location

■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

NPF-60D series is a 60W AC/DC LED driver featuring the constant current mode output. NPF-60D operates from 90~305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for -40°C~+85°C case temperature under free air convection. The entire series is rated with IP67 ingress protection level and is suitable to work for a variety of applications at dry, damp or wet locations. NPF-60D is equipped with the 3 in 1 dimming function so as to provide the design flexibility for LED lighting system.

Model Encoding




SPECIFICATION

MODEL		NPF-60D-12	NPF-60D-15	NPF-60D-20	NPF-60D-24	NPF-60D-30	NPF-60D-36	NPF-60D-42	NPF-60D-48	NPF-60D-54	
	RATED CURRENT	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A	
OUTPUT	RATED POWER	60W	60W	60W	60W	60W	60.12W	60.06W	60W	60.48W	
	CONSTANT CURRENT REGION	7.2 ~ 12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	CURRENT RIPPLE	5.0% max. @rated current									
	CURRENT TOLERANCE	±5.0%									
	SET UP TIME Note.3	500ms/115VAC, 230VAC									
INPUT	VOLTAGE RANGE Note.2	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)									
	FREQUENCY RANGE	47 ~ 63Hz									
	POWER FACTOR (Typ.)	$\label{eq:problem} PF \ge 0.97/115 \text{VAC}, PF \ge 0.95/230 \text{VAC}, PF \ge 0.92/277 \text{VAC} \\ \text{@full load} \\ \text{(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)} $									
	TOTAL HARMONIC DISTORTION	THD< 20%(@load≧60%/115VC, 230VAC; @load≧75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)									
	EFFICIENCY(Typ.)	86%	87%	88%	89%	90%	90%	90%	90%	90%	
	AC CURRENT (Typ.)	0.8A / 115V	AC 0.4	A / 230VAC	0.32A / 27	77VAC					
	INRUSH CURRENT(Typ.)	COLD START 50A(twidth=270µs measured at 50% Ipeak) at 230VAC; Per NEMA 410									
	MAX. NO. of PSUs on 16A CIRCUIT BREAKER	9 units (circuit breaker of type B) / 16 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	<0.25mA / 277VAC									
	STANDBY POWER CONSUMPTION	<0.5W									
PROTECTION	OVER CURRENT	95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed									
	OHORY CHACCIT	15 ~ 17V	17.5 ~ 21V		28 ~ 34V	34 ~ 40V	41 ~ 46V	46 ~ 54V	54 ~ 60V	59 ~ 66V	
	OVER VOLTAGE					1	1				
	OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover Shut down o/p voltage, re-power on to recover									
ENVIRONMENT	WORKING TEMP.	Tcase=-40 ~ +85°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
		Tcase=+85°C									
	MAX. CASE TEMP.	20 ~ 95% RH non-condensing									
	WORKING HUMIDITY STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.03%/C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750(type"HL"), UL879(for 12V,24V only), CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1,									
	SAFETY STANDARDS	BS EN/EN61347-2-13, BS EN/EN62384 independent, EAC TP TC 004,GB19510.1,GB19510.14, IP67 approved; Design refer to BS EN/EN60335-1									
SAFETY &		I/P-O/P:3.75KVAC									
EMC	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≥ 60%); BS EN/EN61000-3-3;									
	EMC EMISSION EMC IMMUNITY	GB17743 and GB17625.1,EAC TP TC 020 Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11; BS EN/EN61547, light industry level(surge immunity Line-Line 2KV);									
	LING IMMONITI	EAC TP TC		VO 1000 + 2,0,	+,0,0,0,11, D	0 11/11/010-	F7, light indus	ary level(surge	, illilliallity Ell	IC-LING ZIVV	
OTHERS	MTBF	3082.1K hrs	min. Telo	ordia SR-332	(Bellcore);	287.9K hrs r	min. MIL-H	DBK-217F (2	25°C)		
	DIMENSION	150*53*35mm (L*W*H)									
	PACKING	0.49Kg;30pcs/15.7Kg/1.0CUFT									
NOTE	2. De-rating may be needed u 3. Length of set up time is med 4. The standby power consum 5. The driver is considered as complete installation, the fir 6. This series meets the typica 7. Please refer to the warranty 8. The ambient temperature de 9. For any application note and	neters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. g may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. Independent of the set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. Independent of the set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. Independent of the set up time.									


■ BLOCK DIAGRAM

PFC fosc: 50~120KHz PWM fosc: 60~130KHz

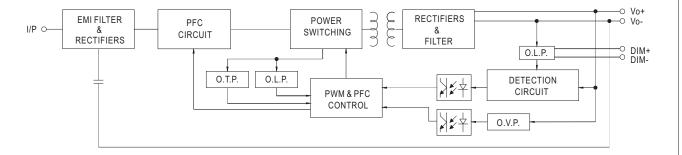

■ DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

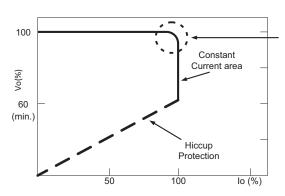


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.


MEAN WELL

■ DIMMING OPERATION




※ 3 in 1 dimming function

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: 100µA (typ.)
- O Applying additive 0 ~ 10VDC

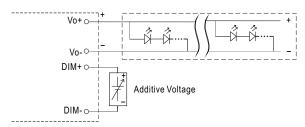


"DO NOT connect "DIM- to Vo-"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

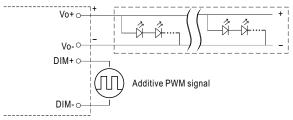



"DO NOT connect "DIM- to Vo-"


Applying additive resistance:

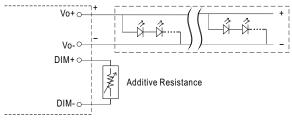

"DO NOT connect "DIM- to Vo-"







Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.

2. The output current could drop down to 0% when dimming input is about 0kΩ or 0Vdc, or 10V PWM signal with 0% duty cycle.



