


3-1/2 digits 1999 Counts Digital LCR Multimeter

Item: MT-5211

- 3-1/2 digits 1999 counts
- Dual slope A/D conversion
- Large backlit LCD display

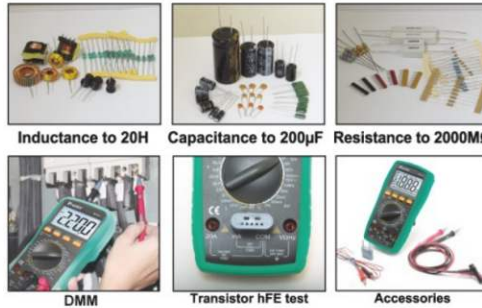

LCR Meter Functions

- Inductance to 20H
- Capacitance to 200µF
- Resistance to 2000MΩ

Extra functions Continuity with beeper, Diode test, Data hold, Auto power off, Low battery indication, Overload indication, Back-light, Transistor Tester.

DC Voltage (V)	200mV/2V/20V/200V±(0.5%+3d) 1000V±(1.0%+5d)
AC Voltage (V)	200mV±(1.2%+3d) 2V/20V/200V±(0.8%+5d) 750V±(1.2%+5d)
DC Current (A)	2mA/20mA±(0.8%+3d) 200mA±(1.2%+4d) 20A±(2.0%+5d)
AC Current (A)	2mA/20mA±(1.0%+5d) 200mA±(2.0%+5d) 20A±(3.0%+10d)
Resistance (Ω)	200±(0.8%+5d) 2K/20K/200K/2MΩ±(0.8%+3d) 20MΩ±(1.0%+15d) 2000MΩ±(5.0%(reading-10)+20d)
Capacitance (µF)	20nF/200nF/2µF±(2.5%+20d) 20µF/200µF±(5.0%+5d)
Inductance (L)	2mH/20mH/200mH/2H/20H±(2.5%+20d)
Temperature (T)	<400°±(1.0%+4d) ≥400°±(1.5%+15d)
Frequency (Hz)	2k/20k/200k/2000K/10M Hz±(1.0%+10d)
Power source	9V 6F22 battery
Dimensions	7.4x3.8x1.4"

Order Today! SalesSupport@EclipseTools.com

Eclipse Enterprises, Inc. ● Tel: 804.561.2610 ● Fax: 804.561.2642

13302 Chula Road, Amelia Court House, VA 23002 ● EclipseTools.com