

Tag-it™ HF-I PLUS TRANSPONDER INLAYS CD

Check for Samples: [RI-117-112A-03](#)

FEATURES

- ISO/IEC 15693-2, -3; ISO/IEC 18000-3 Compliant
- 13.56-MHz Operating Frequency
- 2048-Bit User Memory in 64-Bit x 32-Bit Blocks
- User and Factory Lock Per Block
- Application Family Identifier (AFI)
- Data Storage Format Identifier (DSFID)
- Combined Inventory Read Block

APPLICATIONS

- Product Authentication
- Library
- Supply-Chain Management
- Asset Management
- Ticketing/Stored Value



DESCRIPTION

Texas Instruments Tag-it™ HF-I plus transponder inlays consist of 13.56-MHz high-frequency (HF) transponders that are compliant with the ISO/IEC 15693 and ISO/IEC 18000-3 global open standards. These products offer a user-accessible memory of 2048 bits, organized in 64 blocks, and an extensive command set available in six different antenna shapes, with frequency offset for integration into paper, PVC, or other substrates.

The Tag-it HF-I plus transponder inlays are manufactured with TI's patented laser tuning process to provide consistent read performance. Prior to delivery, the transponders undergo complete functional and parametric testing, in order to provide the high quality that customers have come to expect from TI.

The Tag-it HF-I plus transponder inlays are well suited for a variety of applications including, but not limited to, product authentication, library, supply-chain management, asset management, and ticketing/stored value applications.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Tag-it is a trademark of Texas Instruments.

Table 1. SPECIFICATIONS⁽¹⁾

	PART NUMBER
	RI-I17-112A-03
Supported standard	ISO/IEC 15693-2, -3; ISO/IEC 18000-3
Recommended operating frequency	13.56 MHz
Passive resonance frequency (at 25°C)	13.80 MHz ± 400 kHz (includes frequency offset to compensate further integration into paper or PVC lamination)
Typical required activation field strength to read (at 25°C)	110 dB μ A/m ⁽²⁾
Typical required activation field strength to write (at 25°C)	113 dB μ A/m ⁽²⁾
Factory programmed read-only number	64 bits
Memory (user programmable)	2k bits organized in 64-bit × 32-bit blocks
Typical programming cycles (at 25°C)	100,000
Data retention time (at 55°C)	>10 years
Simultaneous identification of tags	Up to 50 tags per second (reader/antenna dependent)
Antenna size	Outer diameter: \varnothing 32.5 mm + 0.1 mm/–0.2 mm (~1.28 in) Inner diameter: min \varnothing 18 mm (~0.7 in)
Foil width	48 mm ± 0.5 mm (1.89 in ± 0.02 in)
Foil pitch	50.8 mm +0.1 mm/–0.4 mm (2 in)
Thickness	Chip area: 0.34 mm ±0.02 Antenna area (Al both sides): 0.085 mm ±0.01 Antenna area (Al one side): 0.075 mm ±0.008
Base material	Substrate: PET (polyethylenetherephtalate); Antenna: aluminum
Smallest bending radius allowed	18 mm (~0.71 in)
Operating temperature	–25°C to 70°C
Storage temperature (single inlay)	–40°C to 85°C (warpage may occur at upper temperature range)
Storage temperature (on reel)	–40°C to 40°C
Delivery	Single-row tape wound on cardboard reel with 500-mm diameter Reel outer width: approximately 60 mm (~2.36 in) Reel inner width: approximately 50 mm (~1.97 in) Hub diameter: 76.2 mm (3 in)
Typical quantity of good units per reel	5,000

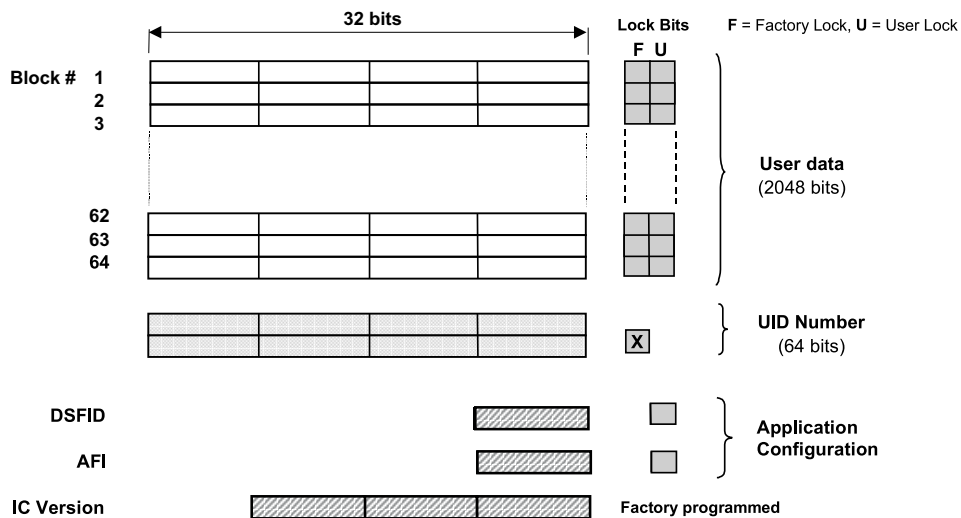
(1) For highest possible read-out coverage, operate readers at a modulation depth of 20% or higher.

(2) After integration into paper

Table 2. SUPPORTED COMMAND SET

REQUEST	REQUEST MODE ⁽¹⁾						
	REQUEST CODE	INVENTORY	ADDRESSED	NON-ADDRESSED	SELECT	AFI	OPT. FLAG
ISO 15693 Mandatory and Optional Commands							
Inventory	0x01	✓	–	–	–	✓	0
Stay Quiet	0x02	–	✓	–	–	–	0
Read_Single_Block	0x20	✓	✓	✓	✓	✓	0/1
Write_Single_Block	0x21	–	✓	✓	✓	–	1
Lock_Block	0x22	–	✓	✓	✓	–	1
Read_Multi_Blocks	0x23	✓	✓	✓	✓	✓	0/1
Select Tag	0x25	–	✓	–	–	–	0
Reset to Ready	0x26	–	✓	✓	✓	–	0
Write_AFI	0x27	–	✓	✓	✓	–	1
Lock_AFI	0x28	–	✓	✓	✓	–	1
Write_DSFD	0x29	–	✓	✓	✓	–	1
Lock_DSFD	0x2A	–	✓	✓	✓	–	1
Get_System_info	0x2B	✓	✓	✓	✓	✓	0
Get_M_BLK_Sec_St	0x2C	✓	✓	✓	✓	✓	0
TI Custom Commands							
Write_2_Blocks	0xA2	–	✓	✓	✓	–	1
Lock_2_Blocks	0xA3	–	✓	✓	✓	–	1

(1) ✓ = Implemented, – = Not applicable

MEMORY ORGANIZATION


IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DLP® Products	www.dlp.com	Communications and Telecom	www.ti.com/communications
DSP	dsp.ti.com	Computers and Peripherals	www.ti.com/computers
Clocks and Timers	www.ti.com/clocks	Consumer Electronics	www.ti.com/consumer-apps
Interface	interface.ti.com	Energy	www.ti.com/energy
Logic	logic.ti.com	Industrial	www.ti.com/industrial
Power Mgmt	power.ti.com	Medical	www.ti.com/medical
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Space, Avionics & Defense	www.ti.com/space-avionics-defense
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video and Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless-apps