



OMRON

H-T40M-P
Status Display Touchscreen

Installation and Operating Manual

H-T40M-P Installation & User Manual

Table of Contents

Section 1 - <i>Important Message</i>	page 3
Section 2 - <i>Introduction</i>	page 4
Section 3 - <i>Safety Precautions</i>	page 4
Section 4 - <i>Package Contents</i>	page 6
Section 5 - <i>Specifications</i>	page 8
Section 6 - <i>Mounting Procedure</i>	page 10
Section 7 - <i>Grounding</i>	page 11
Section 8 - <i>Power Supply & Wiring</i>	page 11
Section 9 - <i>Dip Switches</i>	page 12
Section 10 - <i>Connection to the G9SP</i>	page 12
Section 11 - <i>Operation</i>	page 13
Section 12 - <i>Navigating the Screens</i>	page 14
Section 13 - <i>Screen Properties</i>	page 19
Section 14 - <i>Warranty & Additional Information</i>	page 20

1 IMPORTANT MESSAGE

1

Please read the entire installation manual prior to installing and using this equipment. Only qualified personnel may install, operate or repair this equipment. Omron Scientific Technologies Inc. is not responsible for modified, altered or renovated equipment. Because the equipment has a wide range of applications, users must acquire the appropriate knowledge to use the equipment properly in their specific applications. Persons responsible for the application and the equipment must themselves ensure that each application is in compliance with all relevant requirements, standards and legislation in respect to configuration and safety. Only parts and accessories manufactured according to the specifications set by Omron Scientific Technologies Inc. may be used.

OMRON Scientific Technologies Inc. shall not be liable to anyone for any direct, indirect, special, incidental or consequential damages resulting from the installation, use or repair of this equipment, whether arising in tort, contract, or otherwise. Buyer's sole remedy shall be the replacement, or refund of purchase price, and the choice of the applicable remedy shall be at the sole discretion of OMRON Scientific Technologies Inc.

2 INTRODUCTION

2

H-T40M-P is a status display touchscreen with a 3.3" STN Liquid Crystal Display, and is water- and dust-resistant according to IP65/NEMA 4X (indoor use only.)

H-T40M-P is CE-marked and is highly transient-resistant while in operation.

Also, its compact design makes connections with other machinery more flexible, thus achieving the optimal performance for machines.

3 SAFETY PRECAUTIONS

3

Both the installer and the owner and/or operator of the status display touchscreen must read and understand this installation manual.

3.1. GENERAL

- Only qualified personnel may install or operate the status display touchscreen
- The status display touchscreen must be installed according to the installation instructions.
- The status display touchscreen is designed for stationary installation on a plane surface, where the following conditions are fulfilled:
 - no high explosive risks
 - no strong magnetic fields
 - no direct sunlight
 - no large, sudden temperature changes
 - for use in Pollution Degree 2 Environment
 - for use on the flat surface of Types 1 and 4X (indoor use only) enclosures
- Never allow fluids, metal filings or wiring debris to enter any openings in the status display touchscreen. This may cause fire or electrical shock.
- The status display touchscreen fulfills the requirements of EMC directive 2004/108/EC.

- Storing the status display touchscreen where the temperature is lower or higher than recommended in this manual can cause the LCD display liquid to congeal or become isotopic.
- The LCD display liquid contains a powerful irritant. In case of skin contact, wash immediately with plenty of water. In case of eye contact, hold the eye open, flush with plenty of water and get medical attention.
- The supplier is not responsible for modified, altered or reconstructed equipment.
- Use only parts and accessories manufactured according to specifications of the supplier.
- Peripheral equipment must be appropriate for the application and location.
- The figures in this manual serve an illustrative purpose. Because of the many variables associated with any particular installation, the supplier cannot assume responsibility for actual use based on the figures.
- The supplier neither guarantees that the status display touchscreen is suitable for a customer's particular application, nor assumes responsibility for a customer's product design, installation or operation.

3.2. POWER SOURCE

The status display touchscreen is equipped with a 24VDC input. Supplying power other than 24VDC +/- 15% will severely damage the status display touchscreen. Thus, check the power supply supporting the DC power regularly.

3.3. GROUNDING

Without grounding, the status display touchscreen may be severely affected by excess noise. Make sure that the grounding is done properly from the power connector at the rear side of the status display touchscreen. When power is connected, make sure that the wire is grounded.

Use a cable of at least 2mm² (AWG 14) to ground the status display touchscreen. Ground resistance must be less than 100 Ω (class 3). Note that the ground cable must not be connected to the same ground point as the power circuit.

3.4. INSTALLATION

Communication cables must be separated from power cables for operational circuits. Only use shielded cables to avoid unpredictable problems.

3.5. DURING USE

- Emergency stop and other safety functions may not be controlled from the status display touchscreen.
- Do not use too much force or sharp objects when touching the keys, display, etc.

3.6. SERVICE AND MAINTENANCE

Only qualified personnel should carry out repairs.

- The agreed warranty applies.
- Before carrying out any cleaning or maintenance operations, disconnect the equipment from the electrical supply.
- Clean the display and surrounding front cover with a soft cloth and mild detergent.
- Replacing the battery incorrectly may result in explosion. Only use batteries recommend by supplier.

3.7. DISMANTLING AND SCRAPPING

- The status display touchscreen or parts thereof shall be recycled according to local regulations.
- The following components contain substances that might be hazardous to health and the environment: lithium battery, electrolytic capacitor and display.

4 PACKAGE CONTENTS

4

The following parts are found in the box:

- (1) Status Display Touchscreen H-T40M-P
- (4) Installation fasteners
- (1) Power connector (connected to 24VDC power input)
- (1) Communication cable from HMI status display touchscreen to G9SP




Figure 4-1 Status Display Touchscreen H-T40M-P




Figure 4-2 Installation Fasteners




Figure 4-3 Power connector

5 SPECIFICATIONS

5.1. TECHNICAL SPECIFICATIONS

Parameter	H-T40M-P
Front panel W x H x D	96.0 x 96.0 x 7.0 mm
Mounting Depth	40.6 mm
Cut out dimensions	89.3 x 89.3 mm
Front panel seal	IP 65 / NEMA 4X (indoor use only)
Weight	0.21 kg
COM 1	9-pin female connector: RS232
Screen Size	3.3" diagonal
Display	Mono FSTN LCD, 16 shades of gray
Pixels	240 x240 pixels
Back light type	LED
Back light lifetime	10,000 hours
Touch screen operations	> 1,000,000
Active area of display W x H	58.5 x 58.5 mm
Brightness (cd/m ²)	110
Processor	32 - bit RISC
Status LED	PWR, COM1
Storage temperature	-10 to +60 C
Relative operating humidity	20 - 90% RH
Vibration	0.5 displacement, 10-55Hz, 2 hours X-, Y-, Z-axis
Shock resistance	10G, 11ms 3 times in each direction of X-, Y-, Z-axis
Cooling	Natural Cooling
Electrostatic discharge	IEC 61000-4-2
RF susceptibility	IEC 61000-4-3
High frequency transients	IEC 61000-4-4
CE approvals	EN 6100-6-4, EN 6100-6-2
RF emissions	CISPR 22, Class A

Table 5-1 Product Specifications

5.2. DESCRIPTION OF THE PARTS

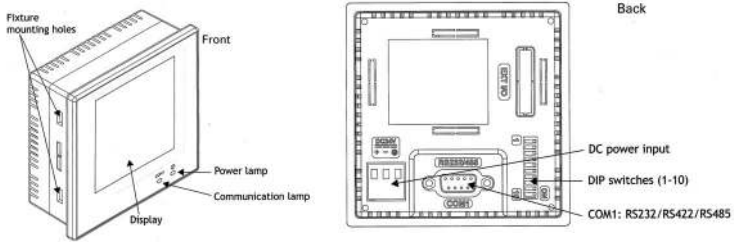


Figure 5-1 H-T40M-P Mechanical Drawing

5.3. EXTERNAL AND CUT-OUT DIMENSIONS

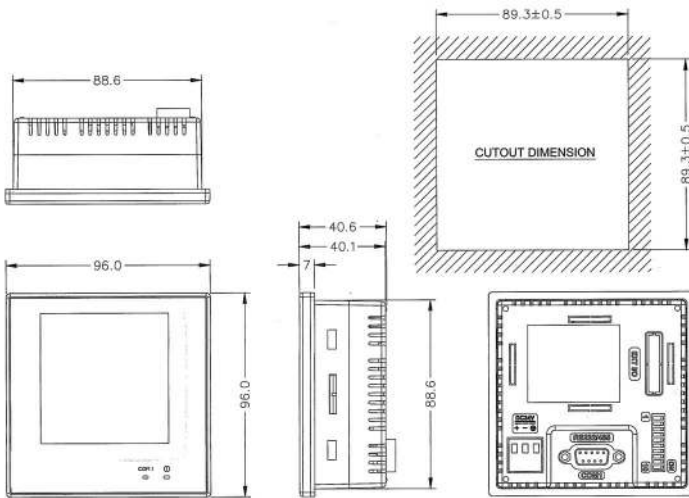


Figure 5-2 External and Cut-out Dimensions

6 MOUNTING PROCEDURE

6

1. Cut out the control front panel to match the dimensions (mm) specified in the External and Cut-out-Dimensions section.
2. Mount the status display touchscreen into the cut-out. Insert the fixtures to the holes on the unit and fasten the screws into the front of the panel. Do not tighten the screws with too much or uneven force or it may cause the deformation of the status display touchscreen.

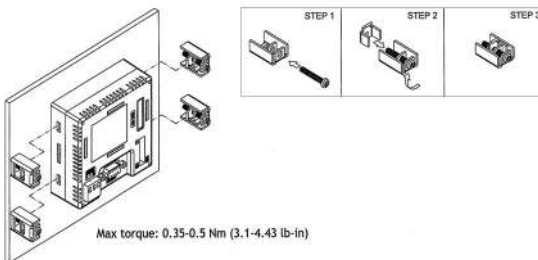


Figure 6-1 Mounting

3. The status display touchscreen is to be installed within the angle of 0 to 135° as shown below.

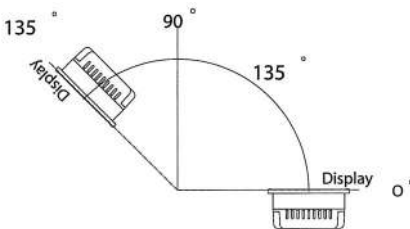


Figure 6-2 Install Angle

7 GROUNDING

7

To make sure the status display touchscreen works properly and to prevent it from radiating radio frequency noise, it must be connected to earth ground.

8 POWER SUPPLY & WIRING

8

H-T40M-P must use the power supply with 24 VDC and the power consumption is 4 W.


⚠ WARNING! To avoid an electrical shock, be sure to switch off the power before connecting the communication cable to the status display touchscreen.

Perform the following steps to wire the power connector:

- 1 **Unplug the power connector and unscrew the screws.**
- 2 **Strip approximately 7-8 mm of insulation. Insert the wire all the way into the power connector and then turn the screws tight.**
- 3 **Plug in the connector to the power input of the status display touchscreen.**

Note: The power connector is already plugged into the power input of the status display touchscreen when the package is first opened.

Use copper conductors only:



Type	Wire Gauge (AWG)	Stripped Length	Torque
Solid	28-12	7-8mm	4.5 lb-in
Stranded	30-12	7-8mm	4.5 lb-in

Figure 8-1 Connector Wiring

9 DIP SWITCHES

9

All the dipswitches are preset by the factory. Please leave the dipswitches in the default position.

SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8	SW9	SW10
ON	ON	ON	ON	ON	OFF	OFF	ON	ON	ON

Table 9-1 Default Factory Position

10 CONNECTION TO THE G9SP

10

1. Locate the included RS-232 cable with two DB9 connectors.
2. Connect the HMI side of the cable to the status display touchscreen serial DB9 COM1 port.
3. Connect the G9SP side of the included RS-232 cable to the DB9 serial option board on the G9SP.

Note: Be sure to connect the cable to the appropriate ports. If the cable is connected backwards, the unit will not perform as specified and/or damage may result.

11 OPERATION

11

Power up the G9SP and status display touchscreen. The “Communicating” indicator should be blinking on the bottom of the main page of the Status Display Touchscreen. If it is not, verify the G9SP is powered up, has a program running, and the communication cable is correctly connected. No programming in the G9SP is required to view the safety inputs or safety outputs or their corresponding error codes. To use the reset functions see Reset Function section.

12 NAVIGATING THE SCREENS

12

12.1. MAIN SCREEN - DEFAULT SCREEN

Communicating Light: This light will blink when the status display touchscreen is connected to the G9SP. If this light is not blinking, check the G9SP power and/or cable connection.

12.1.1 ZONES

The zones allow the user to quickly see if a particular zone is in a run or stop mode. Using the zone function with the G9SP requires the programming of the optional communication transmission output bits in the G9SP configurator software. The status of up to four zones can be displayed.

The optional communication transmission bits are located at the bottom left corner of the G9SP configurator software under the I/O Tag List, under the Output tab. If the G9SP optional output communication bit is high (on) the display will display “RUN”. If the bit is low (off) the display will display “STOP”.

G9SP SAFETY CONTROLLER STATUS DISPLAY			
ZONE 1	STOP	ZONE 2	STOP
ZONE 3	STOP	ZONE 4	STOP
Safety Input Status		Safety Output Status	
Reset Screen		Screen Properties	
Communicating 			

Figure 12-1 Main Screen - Default Screen

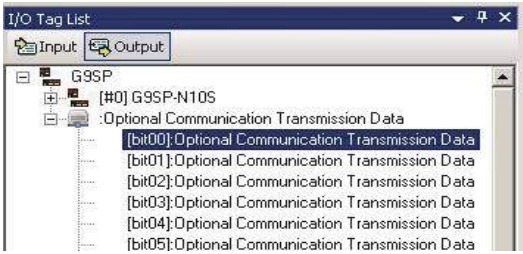


Figure 12-2 Output Tag List

G9SP Optional Output Communication Bit	Zone Status
[bit00]: Optional Communication Transmission Data	Zone 1
[bit01]: Optional Communication Transmission Data	Zone 2
[bit02]: Optional Communication Transmission Data	Zone 3
[bit03]: Optional Communication Transmission Data	Zone 4

Table 12-1 G9SP Optional Output Transmission Data

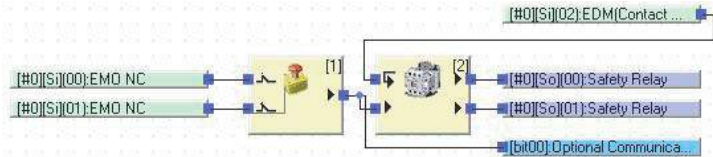


Figure 12-3 G9SP Configuration Example

12.2. SAFETY INPUT STATUS

This screen page will display the current state of the G9SP safety inputs. A dark box represents a closed condition (power is going to the input) i.e., light curtain is unblocked, e-stop is not pressed, safety door interlock is closed. A light grey box represents an open signal (power removed from signal) i.e. light curtain blocked, e-stop pressed, door open.

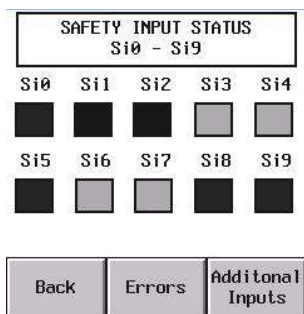


Figure 12-4 Input Status

The “Additional Inputs” button will display the status of Si10-Si19 (when using the G9SP-20S).




Figure 12-5 Input Error Details

To view any errors press the “Errors” button. The Input Error Detail screen will display any detected errors. A zero(0) indicates that there are no errors present, i.e. normal operations. If an error code is displayed, click on the “Code Help” button for a description of the error.

12.3. SAFETY OUTPUT STATUS

This screen will display the current state of the G9SP safety outputs. A dark box represents a closed condition i.e., machine is running. A light grey box represents an open condition, i.e. machine is stopped. The G9SP-N10S will only use So0-So3.

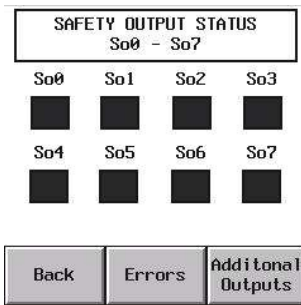


Figure 12-6 Safety Output Status

Pressing the “Additional Outputs” button will display So8-So15 (for the G9SP-10D).

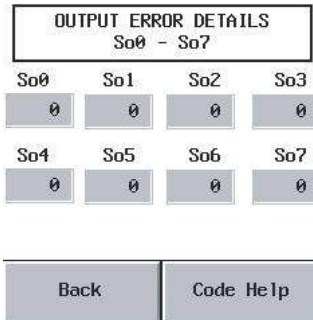


Figure 12-7 Output Error Details

To see if there are any errors on the safety outputs, press the “Errors” button. The Output Error Detail screen will display any detected errors. If all zeroes (“0”) are displayed, no errors are present, i.e. normal operations. If an error code is displayed, click on the “Code Help” button for a description of the error.

12.4. RESET SCREEN

Using the reset function with the G9SP requires the programming of the optional communication input bits in the G9SP configurator software. The optional communication bits are located at the bottom left corner of the G9SP configurator software under the I/O Tag List, under Input Tag.

Note: The status display cannot be used to initiate any kind of machine safety stop since the communication between the G9SP and status display touchscreen is not control reliable. The Reset function, however, is not used to stop the machine. The machine is already in a safe state before the reset command is initiated. If power loss or communication failure were to occur, the machine would remain in a safe state. Because there is a chance of this, a redundant manual reset switch is recommended.

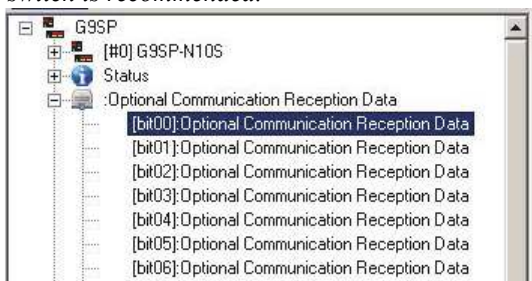


Figure 12-8 G9SP Configurator

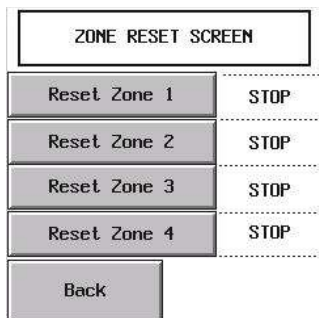


Figure 12-9 Zone Reset Screen

G9SP Optional Input Communication Bit	Zone Status
[bit00]: Optional Communication Reception Data	Reset Zone 1
[bit01]: Optional Communication Reception Data	Reset Zone 2
[bit02]: Optional Communication Reception Data	Reset Zone 3
[bit03]: Optional Communication Reception Data	Reset Zone 4

Table 12-1 Optional Input Communication Bit

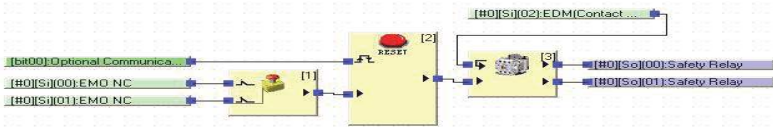


Figure 12-10 G9SP configuration example

Using Optional Communication Bit 00 as reset for an E-Stop circuit.

13 SCREEN PROPERTIES

13

From the Screen Properties screen the contrast and brightness of the screen can be adjusted. Press the up or down button and the display will change immediately. Press the S button on the right to save the setting. When done, press the Back button to return to the main menu.




Figure 13-1 Safety Controller Screen Properties

Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "**Terms**") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "**Products**") by Omron Electronics LLC and its subsidiary companies ("**Omron**"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (iii) sale of products to "forbidden" or other proscribed persons; and (ii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document. (ii) Use in consumer products or any use in significant quantities. (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product. NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE

México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE

Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Automation Control Systems

- Machine Automation Controllers (MAC) • Programmable Controllers (PLC)
- Operator interfaces (HMI) • Distributed I/O • Software

Drives & Motion Controls

- Servo & AC Drives • Motion Controllers & Encoders

Temperature & Process Controllers

- Single and Multi-loop Controllers

Sensors & Vision

- Proximity Sensors • Photoelectric Sensors • Fiber-Optic Sensors
- Amplified Photomicrosensors • Measurement Sensors
- Ultrasonic Sensors • Vision Sensors

Industrial Components

- RFID/Code Readers • Relays • Pushbuttons & Indicators
- Limit and Basic Switches • Timers • Counters • Metering Devices
- Power Supplies

Safety

- Laser Scanners • Safety Mats • Edges and Bumpers • Programmable Safety Controllers • Light Curtains • Safety Relays • Safety Interlock Switches