

#### Contact Closure DC Input Modules





#### **FEATURES**

- Wire Dry Contact Sensors Directly to Module, Eliminate External Power Supply
- 2500 Vac Isolation
- Built-In Status LED
- UL, CSA, CE Mark, TÜV Certified (TÜV not available on OpenLine®)
- Simplifies Field Wiring



#### **CIRCUITRY: Negative True Logic**



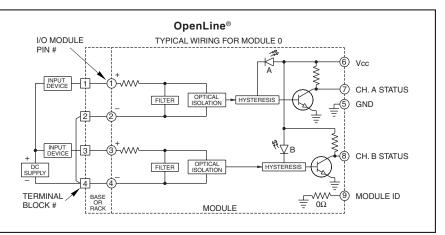

#### **SPECIFICATIONS:**

Specifications apply over operating temperature range unless noted otherwise.

#### **All Modules**

### **Output Specifications**

Output Current Range: 1-50 mA Breakdown Voltage: 50 Vdc minimum Off State Leakage Current: 1 µA maximum On State Voltage Drop: 0.45 Vdc at 50 mA maximum

IIIaxIIIIuIII

#### General Characteristics Isolation Voltage Field to Logic: 2500 Vac (rms) minimum

#### OpenLine®

**Vibration:** .15mm, 10 to 50 Hz per IEC68-2-6 **Mechanical Shock:** 50 G's, 0.5 mS, sinsoidal

per IEC68-2-27

Storage Temperature Range:

-40°C to +100°C

**Operating Temperature Range:** 

-40°C to +85°C

#### G5

**Vibration:** 20 G's peak or .06" double amplitude 10–2000 Hz per MIL–STD–202, Method 204,

Condition D

Mechanical Shock: 1500 G's 0.5 mS half-sine

per MIL-STD-202, Method 213, Condition F Storage Temperature Range:

-40°C to +125°C

**Operating Temperature Range:** 

0°C to +60°C

# Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

#### SPECIFICATIONS: By Part Number

SPECIFICATIONS. By Part Number							
Type/Function G5, Dry Contact		Grayhill Part Number					
		70G-IDC5S	70G-IDC24S				
Units							
ntact Voltage Rating Vdc	25	25	25				
ntact Current Rating mA	5	5	5				
n Time mSec	10	3.0	3.0				
f Time mSec	10	3.0	3.0				
ce (Output Low) Ω	≤ 1.25K	≤1.25K	≤ 1.25K				
e (Output High) Ω	25K	25K	25K				
Itage (Vcc) Vdc	5	5	24				
ge: G5 / Vdc	4.5-5.5	4.5-6	15-30				
y Current mA	120¹	41	41				
$\begin{array}{cccc} \text{ce (Output Low)} & & & & \\ \Omega & & & \\ \text{e (Output High)} & & & \\ \Omega & & & \\ \text{ltage (Vcc)} & & & \\ \text{ge: G5} & & & \\ \end{array}$	≤ 1.25K 25K 5 4.5-5.5	≤1.25K 25K 5 4.5-6					

¹WHEN BOTH CHANNELS ARE ACTIVATED



#### Digital I/O Module Engineering Informatior

#### I/O MODULES

Our line of pluggable input and output modules provide a low cost, versatile method for interconnecting real world analog and digital signals to data acquisition, monitoring, or control systems. All modules provide an optically isolated barrier between sensitive microprocessor or digital logic circuits and field power devices.

In the G5 and OpenLine® packages, analog and digital I/O modules are available with the same pin-out. This gives the flexibility of mixing and matching module types on the same mounting rack or base; making them perfect in applications which require interface to a variety of different sensors and loads.

The case color of the single point modules identify their function. The industry standard for single point I/O module case colors is:

Digital AC Output Module = Black Case
Digital DC Output Module = Red Case
Digital AC Input Module = Yellow Case
Digital DC Input Module = White Case

#### **DIGITAL OUTPUT MODULES**

Digital output modules are used to switch AC and DC loads such as solenoids, motors, or lamps from logic signal levels. Their inputs are directly compatible with TTL or CMOS interface circuitry.

AC output modules have zero voltage turn-on of the load to greatly reduce generated EMI and RFI. They are highly immune to electrical

transients, and have built-in RC snubber networks for increased capability with inductive loads.

DC output modules can operate DC loads over a wide voltage range and have built-in voltage spike protection.

#### **DIGITAL INPUT MODULES**

Digital input modules are used to monitor the status of a load or a sensor (such as a limit switch, pressure switch, or temperature switch). The output of these modules is a logic level signal which corresponds to the status of the device being monitored. A high level output signal indicates the load is off (the switch is open). A low level output signal indicates the load is on (the switch is closed). Input modules are designed to give fast, clean switching by providing filtering and hysteresis.

Input and output modules are compatible in that the output of one can drive the input of the other.

#### **UL, CSA AND CE APPROVALS**

As one of the world's leading manufacturers of I/O modules, we strive to assure that our products comply with all of the applicable international standards. In doing so, we believe your products will also be readily accepted and easily certified. All modules shown in this section have been tested to UL Standard 508 and are documented in UL file number E58632. Similarly, they have been tested to CSA

Standard 22.2 No. 14-95M and are documented in CSA file LR38763. Additionally, OpenLine® modules were tested and passed CSA 22.2 No. 213-M1987 Class I, Div. 2 Groups A, B, C and D. Parts bearing the CE logo indicate conformance with EN50082-2 and EN50081-2 (89/336/EEC EMC directive) as well as EN60950 (61010-1) for the low voltage directive. Contact Grayhill for copies of our Declaration of Conformity or visit out website. Parts bearing the TÜV logo indicate that they were the agency which performed the EN60950 evaluation.


## CONSTRUCTION AND LIFETIME WARRANTY

All of our I/O modules are hard potted with thermally conductive epoxy to withstand harsh industrial environments. The modules provide optical isolation, immunity to mechanical shock and vibration, and operate over a wide temperature range. The module cases are a solvent resistant thermoplastic which meets UL94-V-O rating. The terminal pins are a tinplated copper wire. Component selection and surface mount construction allow low operating junction temperatures for long life. Superior design, rigorous testing, and field data give us the confidence to back our I/O modules with the industry's first lifetime warranty.


#### I/O MODULE WIRING

Analog and digital modules can be placed at any I/O location, however, to minimize the possibility of crosstalk and noise pickup it is a good practice to group similar module types together. 14 or 16 gauge wire is typically used to wire the field devices to the I/O rack terminal block.


#### PART NUMBER EXPLANATION: Digital I/O Modules

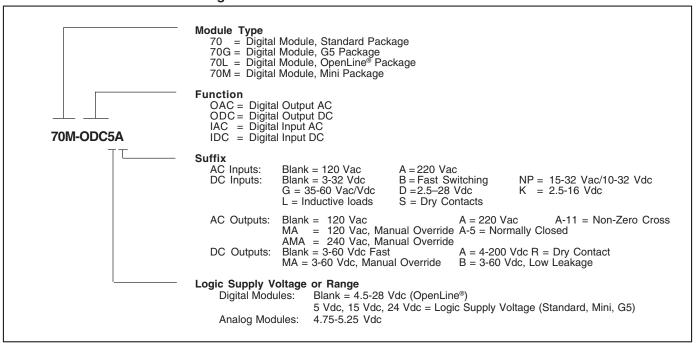

#### **DIMENSIONS: OpenLine® Digital Modules**

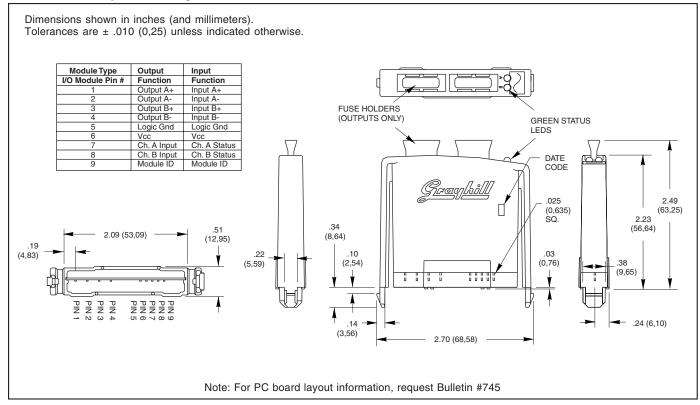


#### **DIMENSIONS: G5 Digital Modules**

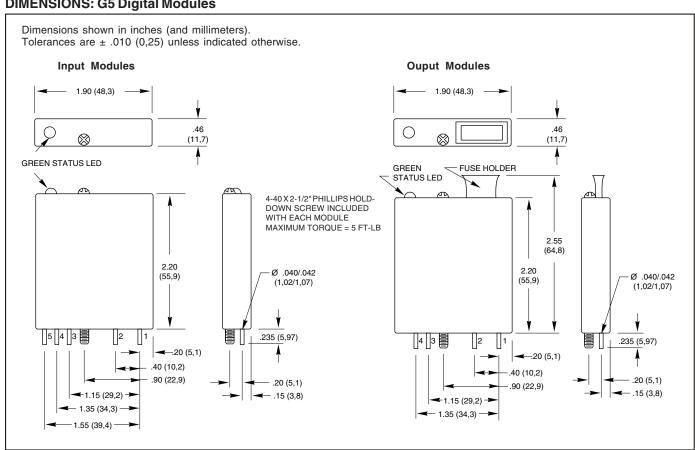




#### Digital I/O Modules Engineering Information

#### **DIMENSIONS: Standard and Miniature Digital Modules**

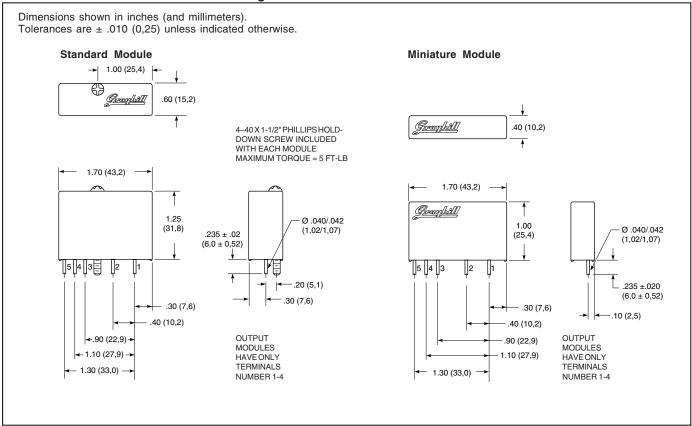

#### WIRING DIAGRAM: Digital I/O Modules

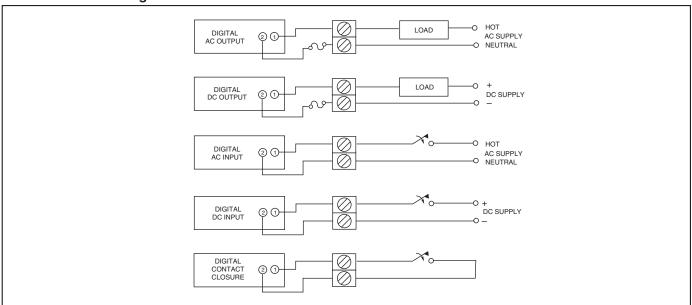

Miniature Saves 35% Space



**Standard**Compatible Industry Size



Fused Outputs, Integral LED



OpenLine® Two Channel, Fused Outputs, Integral LED



#### **FUNCTION**

(Check Specifications for Input and Output combinations, Feature or Option availability.)

AC Output  220 Vac 15 Vdc Normally Closed  24 Vdc Manual Override  4.5-28 Vdc Inductive Load
--



Digital DC Output Load Control Vcc Unique Options 60 Vdc 5 Vdc Dry Contacts 200 Vdc 15 Vdc Manual Override 24 Vdc 4.5-28 Vdc
--



Digital AC Input	Supply Vcc 5 Vdc 15 Vdc 24 Vdc 4.5-28 Vdc	Input Voltage 120 Vac 220 Vac	Unique Options High DC Voltage Input
---------------------	---	-------------------------------------	---

