



# WLAN Modules

|                       |                          |
|-----------------------|--------------------------|
| <b>Series/type:</b>   | <b>D6101</b>             |
| <b>Ordering code:</b> | <b>B30810-D6101-Q819</b> |
| <b>Date:</b>          | <b>June 19, 2008</b>     |
| <b>Version:</b>       | <b>02</b>                |



Preliminary Data

Change History


|           |          |                                   |                      |
|-----------|----------|-----------------------------------|----------------------|
| D6101_M01 | 07.04.08 | Initial datasheet release         | Alexander Chernyakov |
| D6101_M02 | 19.06.08 | 802.11n performance figures added | Alexander Chernyakov |

Preliminary Data

Features

- Miniature fully-integrated WLAN / Bluetooth frontend module for mobile phone applications
- Covering IEEE 802.11 b/g/n (WLAN) and Bluetooth frequency band at 2.4 GHz
- Integrated fully-matched power amplifier with power detector
- Integrated high-rejection filters for co-existence of cellular and WLAN radios
- Integrated high-isolation SP3T antenna switch
- Simple application circuit with minimum external component count
- Power supply from unregulated battery voltage
- Multifunctional ceramic package suitable for **Surface Mounted Technology (SMT)**
- Module provides Ni/Au-plated pads and overmold encapsulation
- RoHS compliant

Block diagram

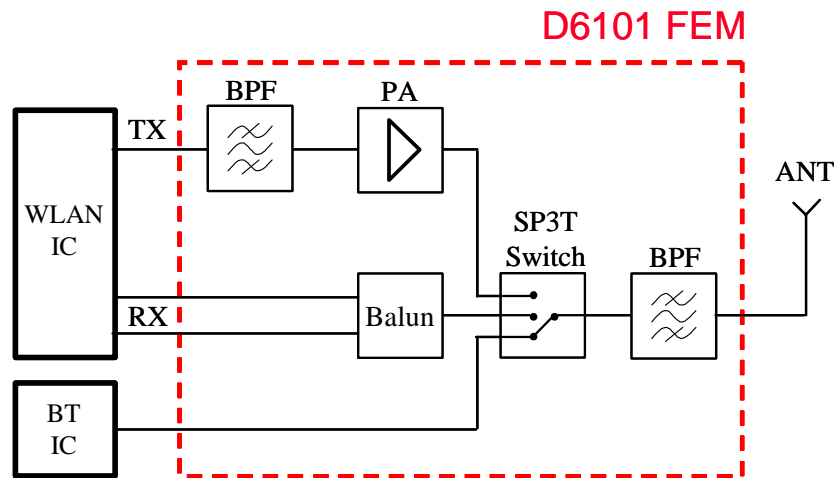

| Type                  | Ordering code            | Marking and Package according to | Packing according to |
|-----------------------|--------------------------|----------------------------------|----------------------|
| D6101 (dev.code R041) | <b>B30810-D6101-Q819</b> | C61157-A4-A54                    | F61074-V8207-Z000    |


Electrostatic Sensitive Device (ESD)

**Preliminary Data**
**Maximum Ratings**

|  |                   |             |     |
|--|-------------------|-------------|-----|
| Operation temperature range              | T                 | -30... +85  | °C  |
| Storage temperature range                | T <sub>stg</sub>  | -55... +125 | °C  |
| Max. input power on Tx Port              | P <sub>in</sub>   | +5          | dBm |
| Max. input power on RF Ports (except Tx) | P <sub>in</sub>   | +30         | dBm |
| Max. control voltage (Switch)            | V <sub>ctrl</sub> | +5.4        | V   |
| Max. supply voltage (PA)                 | V <sub>cc</sub>   | +5.4        | V   |
| Max. supply current (PA)                 | I <sub>max</sub>  | 400         | mA  |
| Max. reference voltage (PA)              | V <sub>ref</sub>  | +3.0        | V   |

**ESD Ratings**

|                             |      |    |              |
|-----------------------------|------|----|--------------|
| Human Body Model            | 1000 | V  | JESD22-A114C |
| Machine Model               | 100  | V  | JESD22-A115A |
| Charge Device Model         | 500  | V  | JESD22-C101  |
| Contact Discharge (ANT pin) | 8    | kV | IEC60001-2-4 |

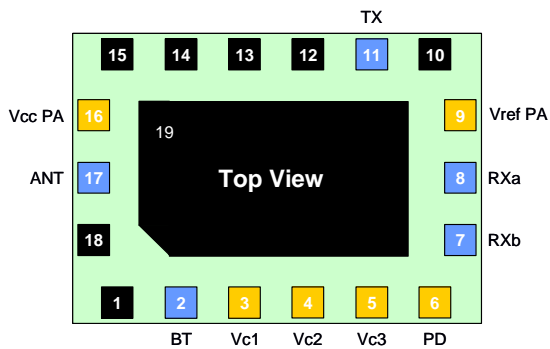**Pin configuration**

**Pin assignment:**

- |                           |                              |
|---------------------------|------------------------------|
| 1 - GND                   | 11 - TX                      |
| 2 - Bluetooth             | 12 - GND                     |
| 3 - Vc1 (switch control)  | 13 - GND                     |
| 4 - Vc2 (switch control)  | 14 - GND                     |
| 5 - Vc3 (switch control)  | 15 - GND                     |
| 6 - Power detector output | 16 - Vcc PA                  |
| 7 - RXb (balanced)        | 17 - ANT                     |
| 8 - RXa (balanced)        | 18 - GND                     |
| 9 - Vref PA               | 19 - GND (center ground pad) |
| 10 - GND                  |                              |

**Switch Control Logic**

|     | ANT - BT | ANT - TX | ANT - RX | All Off |
|-----|----------|----------|----------|---------|
| Vc1 | High     | Low      | Low      | Low     |
| Vc2 | Low      | High     | Low      | Low     |
| Vc3 | Low      | Low      | High     | Low     |

**Preliminary Data**
**Bias and Switch Characteristics**

|   |            |                |         |
|---|------------|----------------|---------|
| Switch control voltage High                     | $V_{CTRL}$ | 2.7 ... 4.5    | V       |
| Switch control voltage Low                      | $V_{CTRL}$ | 0 ... 0.2      | V       |
| Switch control voltage High (reduced linearity) | $V_{CTRL}$ | 1.8 ... 2.7*   | V       |
| Switch control current max.                     | $I_{CTRL}$ | 50             | $\mu A$ |
| Switching time max.                             | $T_{SW}$   | 100            | ns      |
| Switch IP1dB                                    | IP1dB      | +29..32        | dBm     |
| PA supply voltage                               | $V_{CC}$   | 3.1 ... 4.5**  | V       |
| PA reference voltage                            | $V_{REF}$  | 2.8 +/- 0.1*** | V       |

\* IP1dB  $\geq$  +27 dBm, IP0.1dB  $\geq$  +24 dBm.

\*\* unregulated battery operation is possible.

\*\*\* with an external serial resistor of 51..68 Ohm (see application schematic on page 19)


**Caution**

**!** Setting the switch in the wrong state (RX or BT) during the TX mode (PA turned on, Vref and Vcc voltages applied) may damage the FEM if the output power is high (>+17 dBm). Please make sure that the software which controls the FEM does not allow this state during system operation or calibration. Alternatively, using the modified application circuit (see page 20) will force this state not to happen on hardware level. **!**


Preliminary Data

Mechanical Drawing

(ceramic package MC190E)

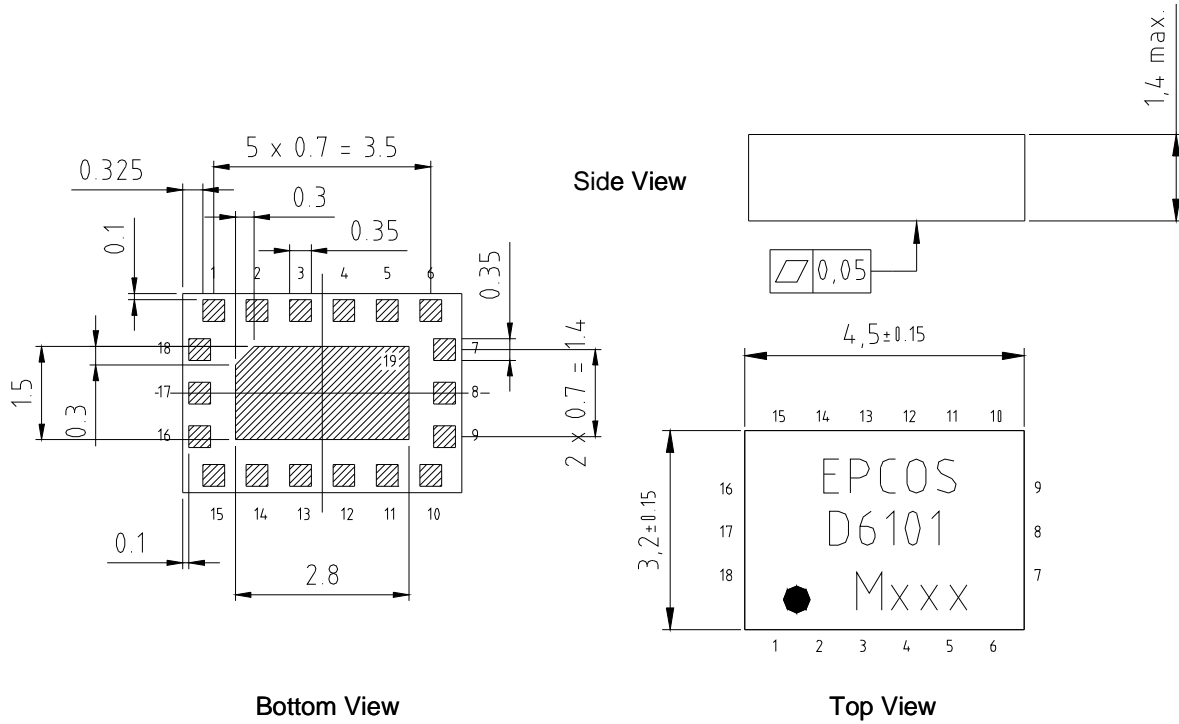

Recommended Board Footprint

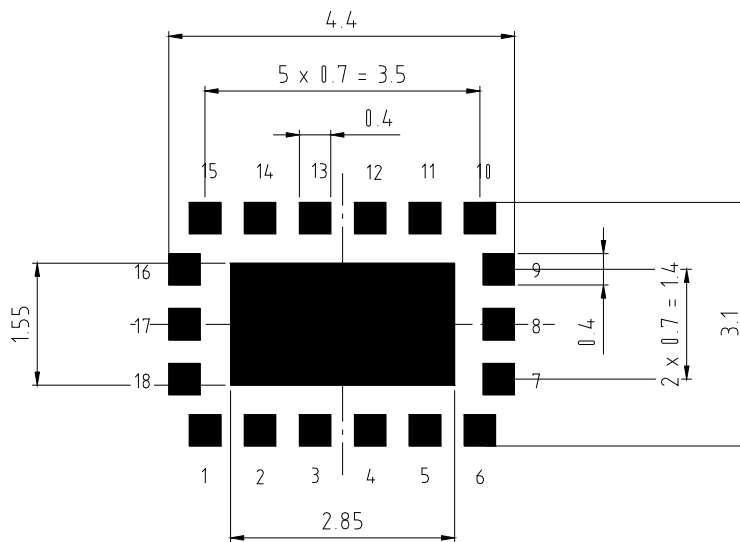

All dimensions in mm.

**Preliminary Data**
**Characteristics Bluetooth TX / RX Mode**

Operating temperature range: T = -30 ... +85°C

Terminating impedances on all RF ports: Z = 50Ω

|                            | min. | typ. | Max. |    |
|----------------------------|------|------|------|----|
| <b>Insertion loss</b>      |      |      |      |    |
| 2400 – 2500 MHz            | -    | 3.3  | 4.0  | dB |
| <b>Amplitude Ripple</b>    |      |      |      |    |
| 2400 – 2500 MHz            | -    | -    | 1.5  | dB |
| <b>Return loss (TX/RX)</b> |      |      |      |    |
| 2400 – 2500 MHz            | 10   | 15   | -    | dB |
| <b>Return loss (ANT)</b>   |      |      |      |    |
| 2400 – 2500 MHz            | 10   | 15   | -    | dB |
| <b>Frequency response</b>  |      |      |      |    |
| DC – 824 MHz               | 48   | 60   | -    | dB |
| 824 – 960 MHz              | 48   | 55   | -    | dB |
| 960 – 1570 MHz             | 43   | 47   | -    | dB |
| 1570 – 1580 MHz            | 43   | 47   | -    | dB |
| 1580 – 1710 MHz            | 43   | 47   | -    | dB |
| 1710 – 1850 MHz            | 43   | 50   | -    | dB |
| 1850 – 1910 MHz            | 43   | 50   | -    | dB |
| 1910 – 1990 MHz            | 42   | 50   | -    | dB |
| 1990 – 2170 MHz            | 25   | 35   | -    | dB |
| 3200 – 3500 MHz            | -    | 15   | -    | dB |
| 4800 – 5850 MHz            | 30   | 40   | -    | dB |
| 7200 – 7500 MHz            | 18   | 25   | -    | dB |

**Preliminary Data**
**Characteristics WLAN RX Mode**

Operating temperature range: T = -30 ... +85°C

Terminating impedances on all RF ports: Z = 50Ω

|                           | min. | Typ. | Max. |    |
|---------------------------|------|------|------|----|
| <b>Insertion loss</b>     |      |      |      |    |
| 2400 – 2500 MHz           | -    | 3.8  | 4.4  | dB |
| <b>Amplitude Ripple</b>   |      |      |      |    |
| 2400 – 2500 MHz           | -    | -    | 1.5  | dB |
| <b>Return loss (RX)</b>   |      |      |      |    |
| 2400 – 2500 MHz           | 10   | 15   | -    | dB |
| <b>Return loss (ANT)</b>  |      |      |      |    |
| 2400 – 2500 MHz           | 10   | 15   | -    | dB |
| <b>Frequency response</b> |      |      |      |    |
| DC – 824 MHz              | 48   | 60   | -    | dB |
| 824 – 960 MHz             | 48   | 55   | -    | dB |
| 960 – 1570 MHz            | 43   | 47   | -    | dB |
| 1570 – 1580 MHz           | 43   | 47   | -    | dB |
| 1580 – 1710 MHz           | 43   | 47   | -    | dB |
| 1710 – 1850 MHz           | 43   | 50   | -    | dB |
| 1850 – 1910 MHz           | 43   | 50   | -    | dB |
| 1910 – 1990 MHz           | 40   | 50   | -    | dB |
| 1990 – 2170 MHz           | 25   | 35   | -    | dB |
| 3200 – 3500 MHz           | -    | 15   | -    | dB |
| 4800 – 5850 MHz           | -    | 30   | -    | dB |



**Preliminary Data**
**Characteristics WLAN TX Mode \***

Operating temperature range: T = -30 ... +85°C

Terminating impedances on all RF ports: Z = 50Ω

|  | Min. | Typ. | Max. |     |
|--|------|------|------|-----|
| <b>Insertion gain</b>                              |      |      |      |     |
| 2400 – 2500 MHz                                    | 24   | 27   | -    | dB  |
| <b>Gain variation (full band)</b>                  |      |      |      |     |
| 2400 – 2500 MHz                                    | -    | -    | 2.0  | dB  |
| <b>Return loss (TX)</b>                            |      |      |      |     |
| 2400 – 2500 MHz                                    | -    | 6    | -    | dB  |
| <b>Return loss (ANT)</b>                           |      |      |      |     |
| 2400 – 2500 MHz                                    | 10   | 15   | -    | dB  |
| <b>Frequency response</b>                          |      |      |      |     |
| DC – 960 MHz                                       | -20  | -40  | -    | dB  |
| 960 – 1570 MHz                                     | -30  | -40  | -    | dB  |
| 1570 – 1580 MHz                                    | -30  | -40  | -    | dB  |
| 1580 – 1710 MHz                                    | -25  | -35  | -    | dB  |
| 1710 – 1850 MHz                                    | -20  | -30  | -    | dB  |
| 1850 – 1910 MHz                                    | -20  | -25  | -    | dB  |
| 1910 – 1990 MHz                                    | -15  | -22  | -    | dB  |
| 1990 – 2170 MHz                                    | -10  | -22  | -    | dB  |
| 3200 – 3500 MHz                                    | -    | 7    | -    | dB  |
| 4800 – 5000 MHz                                    | -    | -45  | -    | dB  |
| 7200 – 7500 MHz                                    | -    | -35  | -    | dB  |
| <b>Output power in 802.11g mode, EVM &lt; 3.3%</b> |      |      |      |     |
| 54 Mbps OFDM                                       |      |      |      |     |
| Vcc=3.3V, Vref=2.8V, Ta=25°C                       | 13   | 15   | -    | dBm |
| <b>Added EVM in 802.11g mode</b>                   |      |      |      |     |
| 54 Mbps OFDM @ +15dBm Pout                         |      |      |      |     |
| Vcc=3.3V, Vref=2.8V, Ta=25°C                       | -    | 3.3  | -    | %   |

**Preliminary Data**

|  |       |       |           |     |
|--|-------|-------|-----------|-----|
| <b>Output power in 802.11b mode</b><br>11 Mbps CCK<br>Vcc=3.3V, Vref=2.8V, Ta=25°C   | 15    | 17    | -         | dBm |
| <b>ACPR in 802.11b mode (1<sup>st</sup>/2<sup>nd</sup> sidelobe)</b><br>1 Mbps CCK @ +18dBm output<br>Vcc=3.3V, Vref=2.8V, Ta=25°C | -     | -     | -30 / -50 | dBc |
| <b>Output power in 802.11n mode</b><br>40 MHz channel, 150 Mbps OFDM, 64 QAM 5/6<br>Vcc=3.3V, Vref=2.8V, Ta=25°C                   | -     | 14    | -         | dBm |
| <b>Current consumption</b><br>54 Mbps OFDM @ +15 dBm Pout<br>Vcc=3.3V, Vref=2.8V, Ta=25°C  | -     | 130   | 180       | mA  |
| 11 Mbps CCK @ +17 dBm Pout<br>Vcc=3.3V, Vref=2.8V, Ta=25°C   | -     | 150   | 220       | mA  |
| <b>1dB compression point (at ANT pin)</b><br>54 Mbps OFDM signal<br>Vcc=3.3V, Vref=2.8V, Ta=25°C                                   | +17.0 | +18.5 | -         | dBm |
| <b>Tx Harmonics</b><br>1 Mbps CCK @ +18dBm Pout<br>Vcc=3.3V, Vref=2.8V, Ta=25°C  |       |       |           |     |
| 4800 – 5000 MHz  | -     | -48   | -42       | dBm |
| 7200 – 7500 MHz  | -     | -48   | -42       | dBm |
| <b>Quiescent current</b><br>Vcc=3.3V, Vref=2.8V, Ta=25°C   | -     | 100   | -         | mA  |
| <b>Power detector voltage</b><br>Vcc=3.3V, Vref=2.8V, Ta=25°C<br>Pout=+10 dBm  | 0.2   | 0.4   | -         | V   |
| Pout=+17 dBm   | -     | 0.9   | 1.2       | V   |

\* Data shown for R5=68 Ohm (application circuits on pages 19..20)

**Preliminary Data**
**Characteristic Isolations**


Operating temperature range: T = -30 ... +85°C

Terminating impedances on all RF ports: Z = 50Ω

|  | Min. | Typ. | Max. |    |
|--|------|------|------|----|
| <b>Isolation WLAN TX – WLAN RX</b><br>2400 – 2500 MHz      | 20   | -    | -    | dB |
| <b>Isolation WLAN TX – BT</b><br>2400 – 2500 MHz           | 20   | -    | -    | dB |
| <b>Isolation BT – WLAN RX</b><br>2400 – 2500 MHz           | 25   | -    | -    | dB |
| <b>Isolation WLAN TX – ANT (Tx off)</b><br>2400 – 2500 MHz | 20   | -    | -    | dB |
| <b>Isolation WLAN RX – ANT (Rx off)</b><br>2400 – 2500 MHz | 20   | -    | -    | dB |
| <b>Isolation BT – ANT (BT off)</b><br>2400 – 2500 MHz      | 20   | -    | -    | dB |

Preliminary Data

Evaluation Board

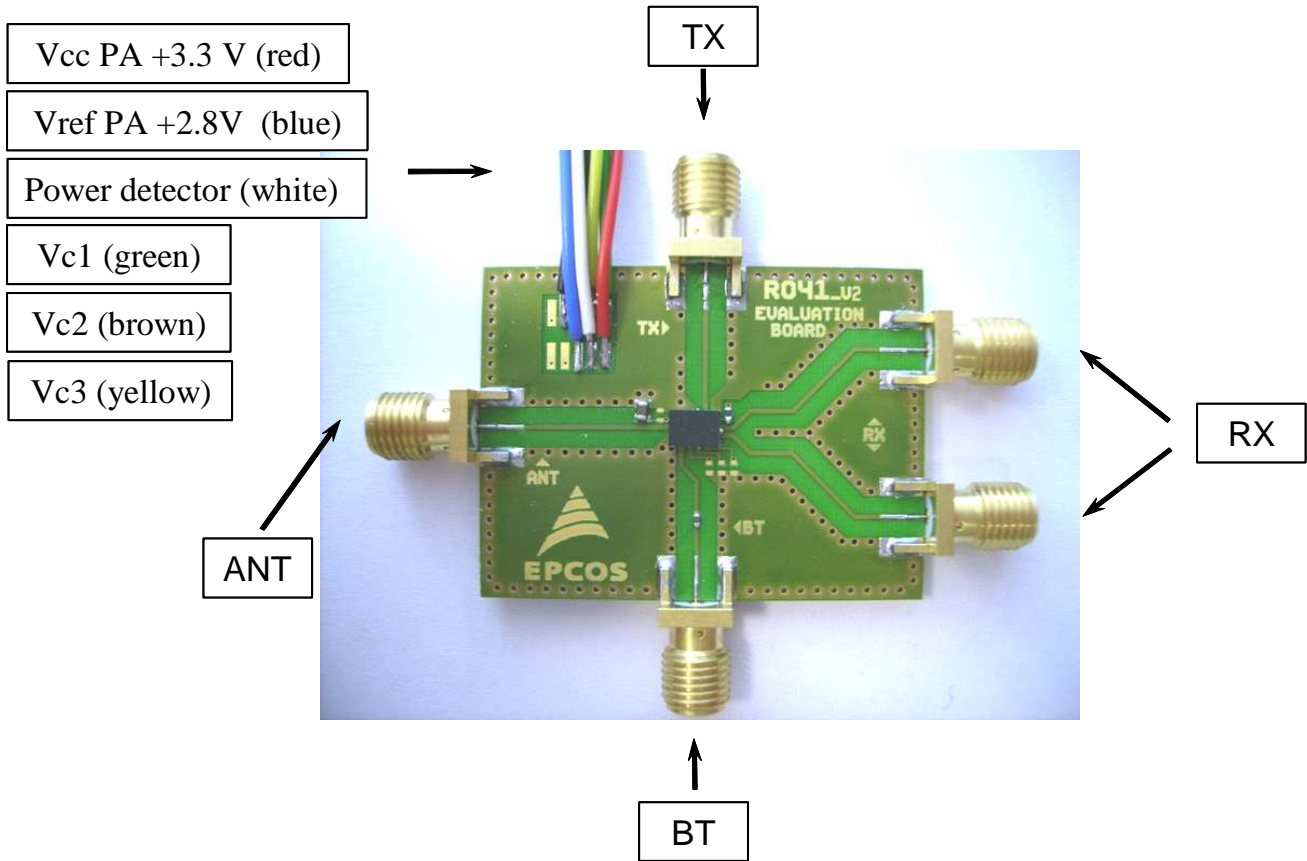


Evaluation PCB loss:


|          |        |
|----------|--------|
| BT path  | 0.3 dB |
| RXa path | 0.4 dB |
| RXb path | 0.4 dB |
| TX path  | 0.3 dB |

Preliminary Data

Typical characteristics Bluetooth TX / RX Mode (PCB loss included)

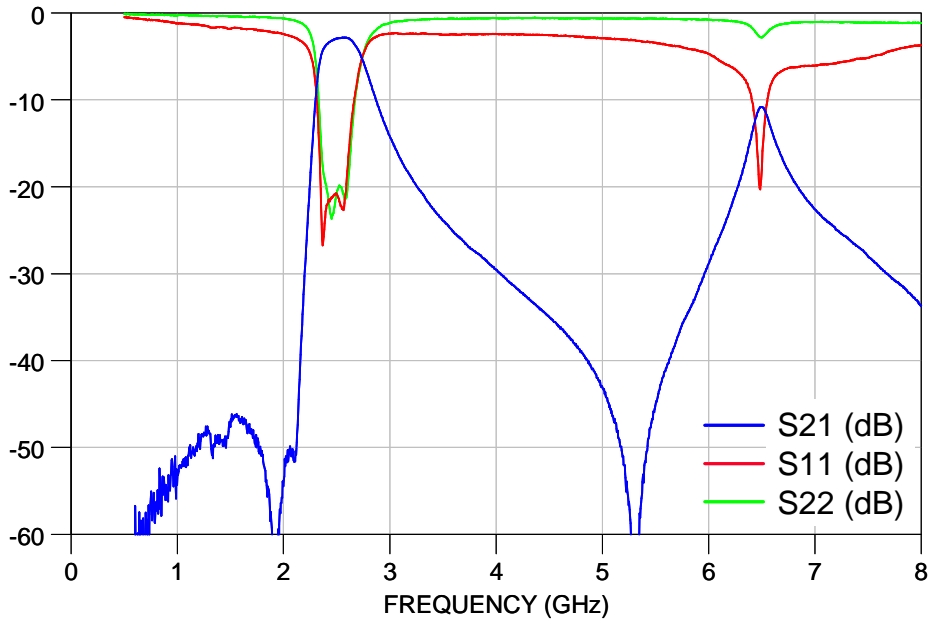

Typical characteristics WLAN RX Mode (PCB loss included)<sup>1</sup>

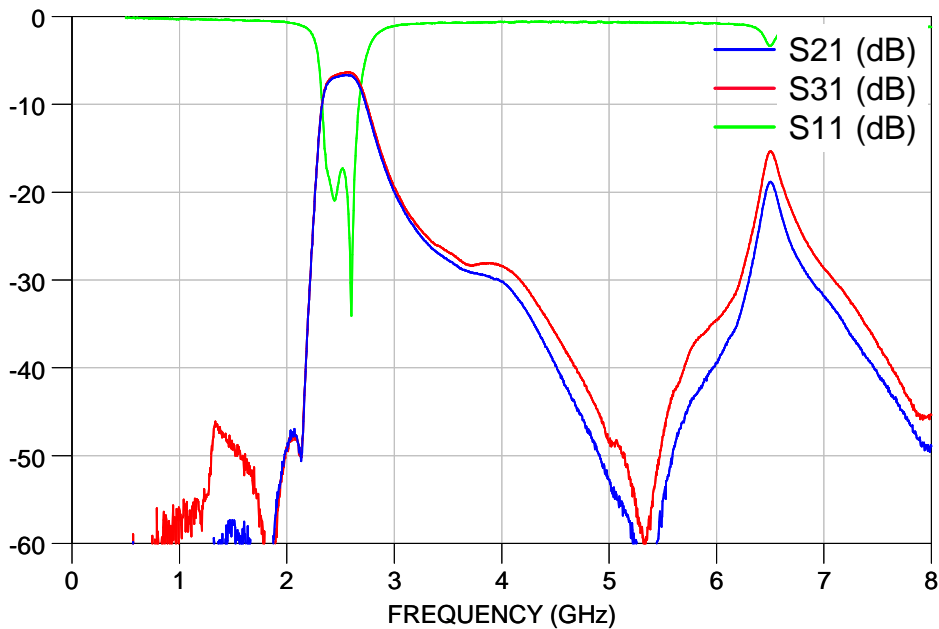


<sup>1</sup> - single-ended measurements. Actual insertion loss is 3 dB better when measuring balanced

Preliminary Data


Typical characteristics WLAN TX Mode (PCB loss included)\*

(Vcc=3.3V, Vref=2.8V, Ta=25°C)

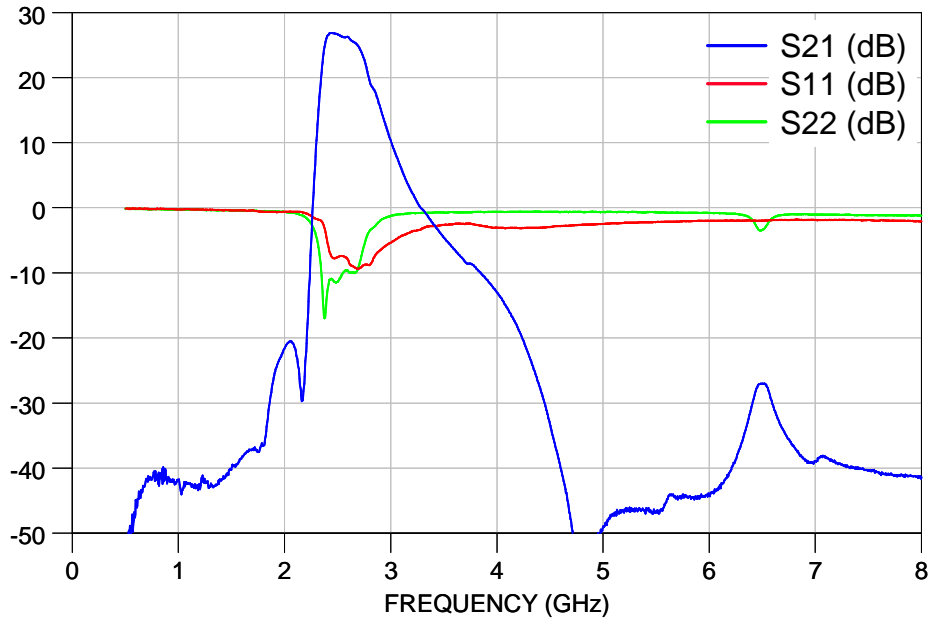

Typical Tx Gain\*


(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Vref=2.8V, Ta=25°C, f=2.45 GHz)

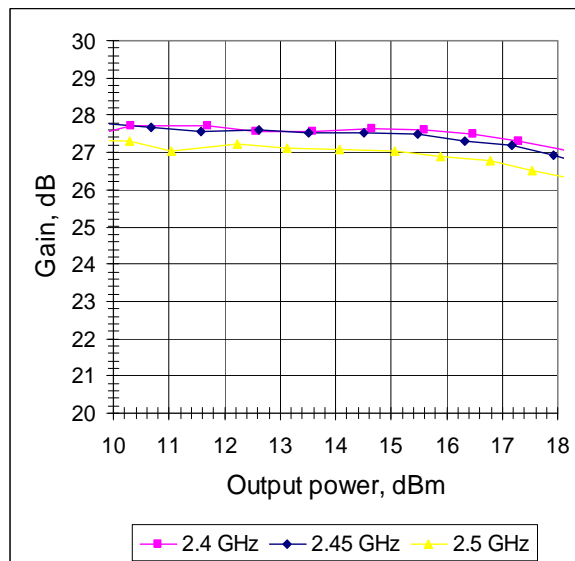

Preliminary Data


**Typical Tx Power Consumption\***

(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Vref=2.8V, Ta=25°C, f=2.45 GHz).

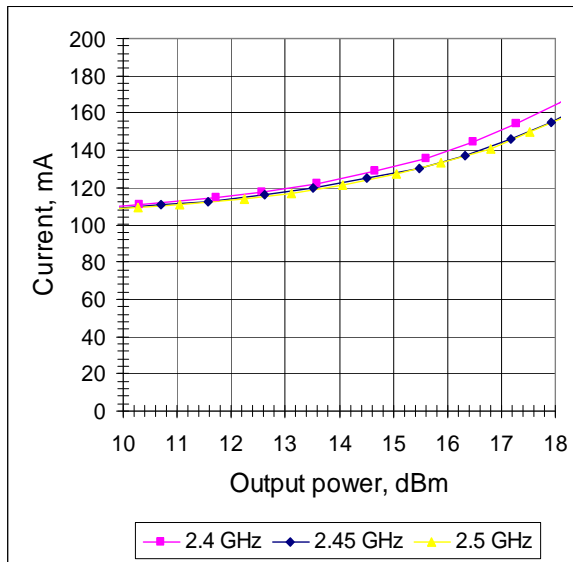

**Typical EVM Performance\***


(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Vref=2.8V, Ta=25°C, f=2.45 GHz)

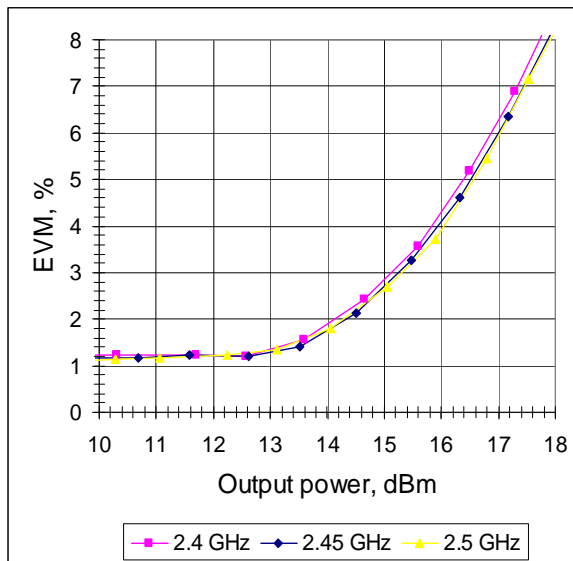

Preliminary Data


**Typical Tx Harmonics\***

(Measurement Conditions: Pout=+17dBm, frequency sweep (CW) 2.4..2.5 GHz Vcc=3.3V, Vref=2.8V, Ta=25°C)

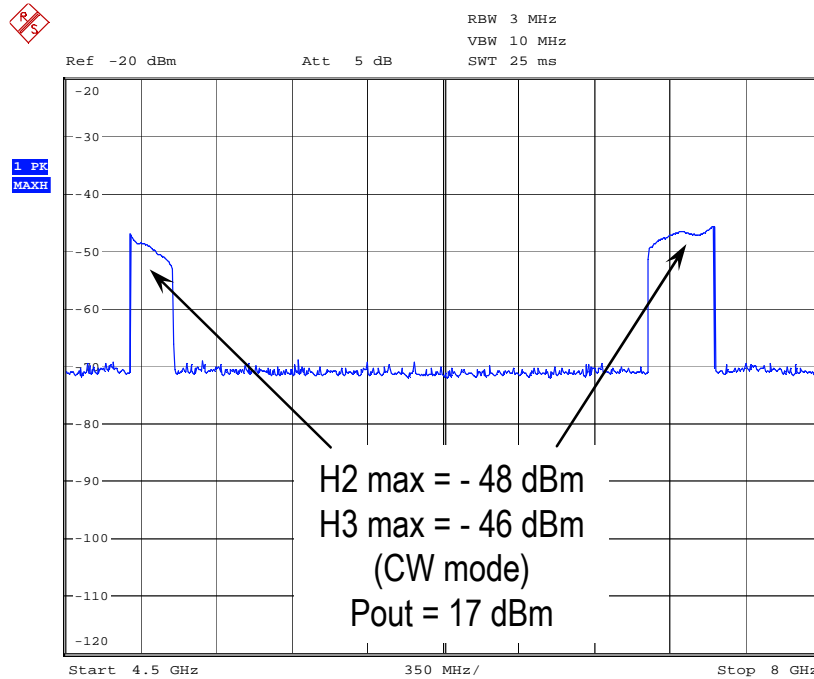

**Typical Power Detector Output Voltage\***

(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Vref=2.8V, Ta=25°C, f=2.45 GHz).

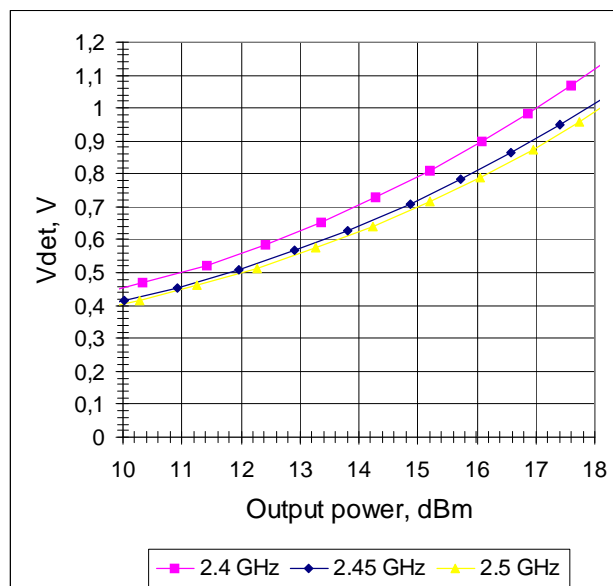




Preliminary Data


**TX gain versus PA\_Vcc variation (3.0..4.5V)\***

(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vref=2.8V, Ta=25°C, f=2.45 GHz).

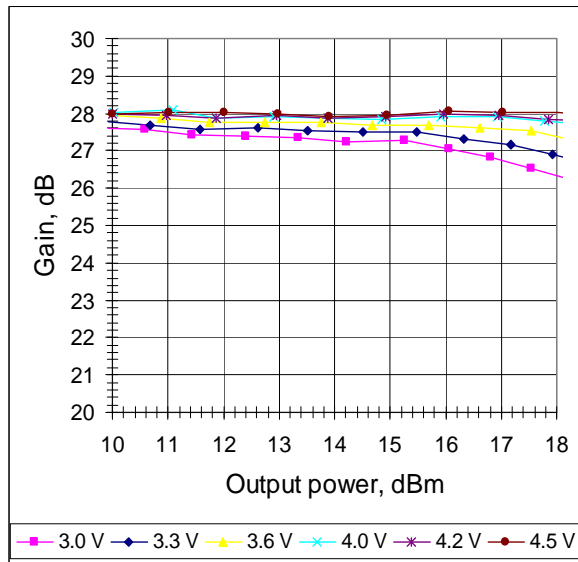

**TX current consumption versus PA\_Vcc variation (3.0..4.5V)\***


(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vref=2.8V, Ta=25°C, f=2.45 GHz).

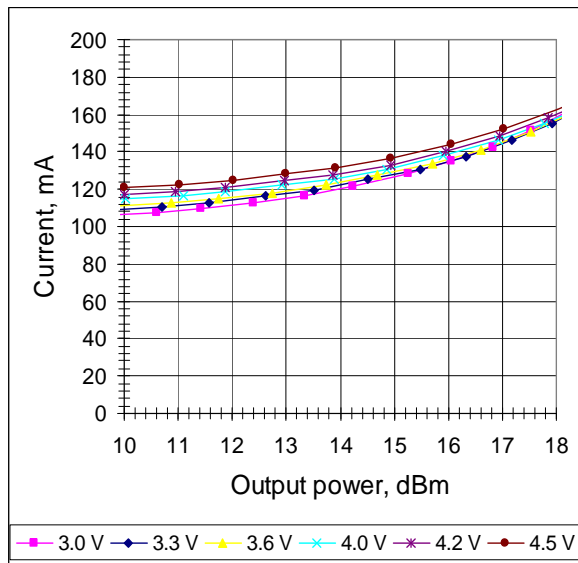

Preliminary Data


**TX EVM versus PA Vcc variation (3.0..4.5V)\***

(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vref=2.8V, Ta=25°C, f=2.45 GHz).

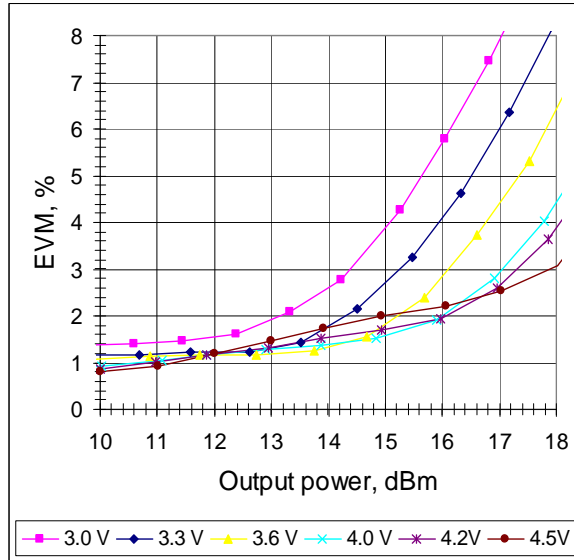

**TX gain versus Vref variation\***


(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Ta=25°C, f=2.45 GHz).

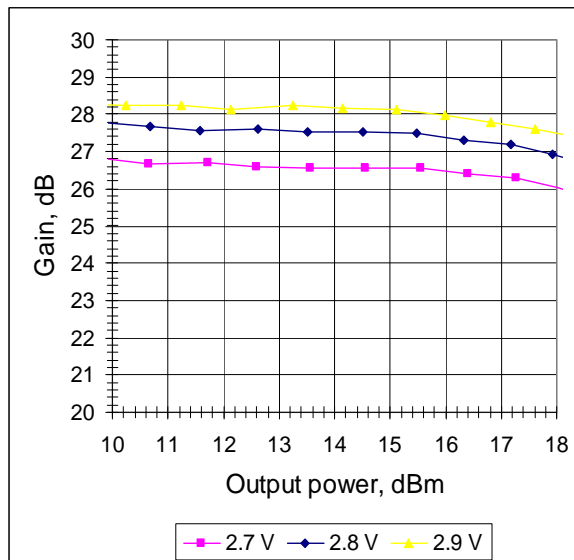

Preliminary Data


**TX current consumption versus Vref variation\***

(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Ta=25°C, f=2.45 GHz).

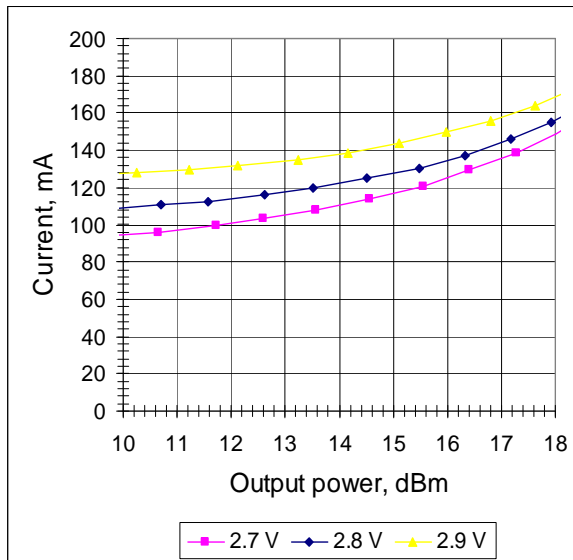

**TX EVM versus Vref variation\***


(Measurement Conditions: 802.11g mode / 54 Mbps OFDM, duty cycle 99%, Vcc=3.3V, Ta=25°C, f=2.45 GHz).

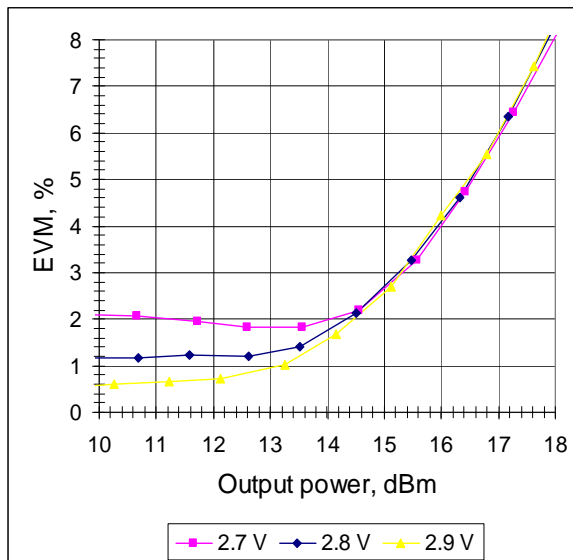

\* Data shown with R5=68 Ohm (application circuits on pages 19..20)

Preliminary Data


Reference Design Example

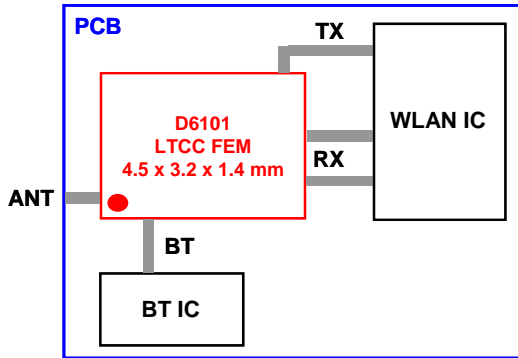

The D6101 front-end module is intended for mobile phone applications, where size is a critical parameter.

The D6101 FEM allows to realize a simple and very compact reference design with minimum BOM count for Bluetooth and WLAN application. A common antenna is shared between the WLAN and the Bluetooth radios.

Application Circuit

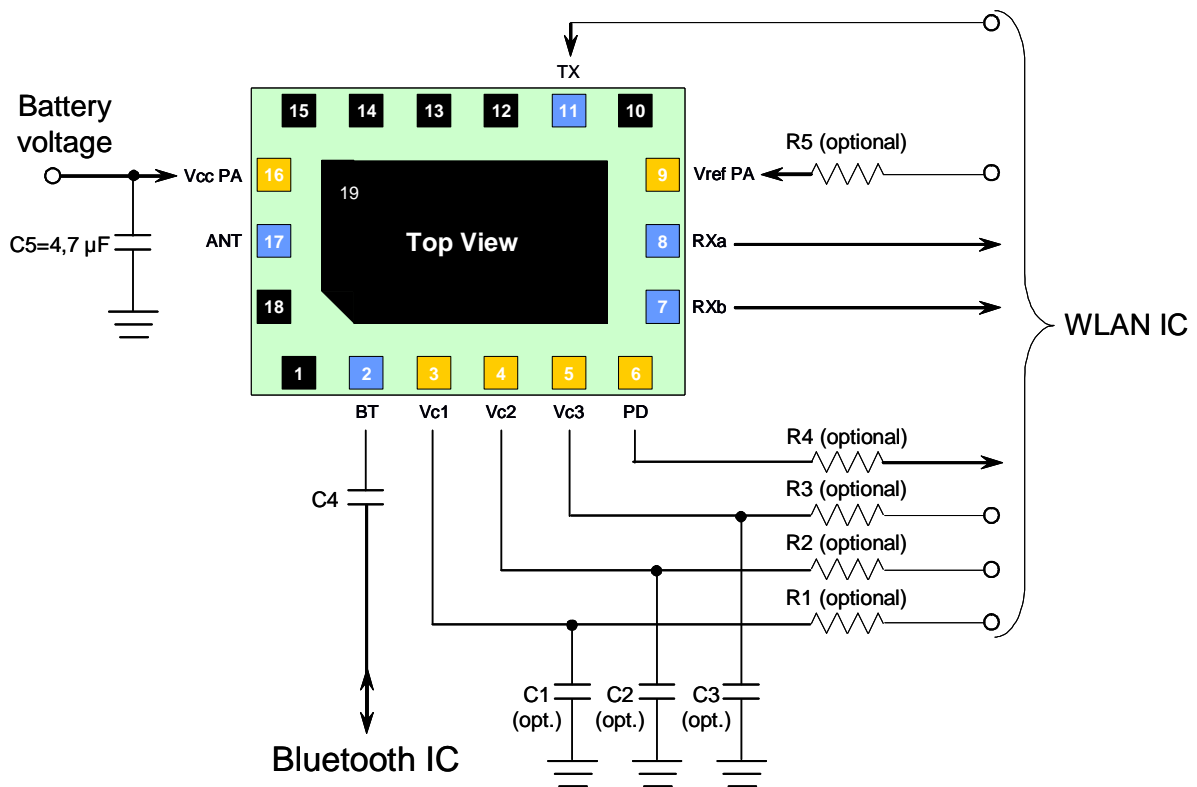

All RF ports are 50 Ohm matched. WLAN RX ports are matched to 100 Ohm differential impedance. All RF ports except for Bluetooth RX/TX are internally DC-decoupled. For the Bluetooth port an external DC-decoupling capacitors may be required (this pin is coupled with DC voltage).

Preliminary Data

For PA power supply, one external capacitor ( $C5=4.7\mu F$ ) should be connected to the PA Vcc pin. If such a large capacitor is already used somewhere else in the reference design, it might be redundant.


The Vcc pin (PA power supply) can be operated from an unregulated battery voltage. The PA reference voltage pin (Vref) needs a stabilized voltage provided either from an external LDO voltage regulator or directly taken from the power management IC of the WLAN chipset. Usually an additional series resistor (R5) between the D6101 FEM and the voltage regulator is required to set the correct voltage level on the Vref pin. If the available regulated voltage is in the range of  $2.8\pm 0.1V$ , the recommended R5 value is 51..68 Ohm. The R5 value can be reduced for better linearity or increased for better efficiency.

The switch control lines may need additional external RC elements (R1..R3, C1..C3) acting as low-pass filters to shape the switching transients coming from the WLAN IC (depending on the switching characteristics, these R,C may be not required).

The power detect signal filtering is integrated inside the FEM (10 kOhm, 5 pF, IF bandwidth = 20 MHz). An additional series resistor (R4) might be applied to set the right detector voltage level for a specific WLAN chipset.

Alternative application circuit

Setting the switch in the wrong state (RX or BT) during the TX mode (PA turned on, Vref and Vcc voltages applied) may damage the FEM if the output power is high ( $>+17$  dBm). This happens due to a very strong reflected signal from the turned off switch, which can damage the power amplifier circuitry. In case it can not be guaranteed that this forbidden control pin combination does not happen during the system operation or calibration the following modified application circuit has to be used:

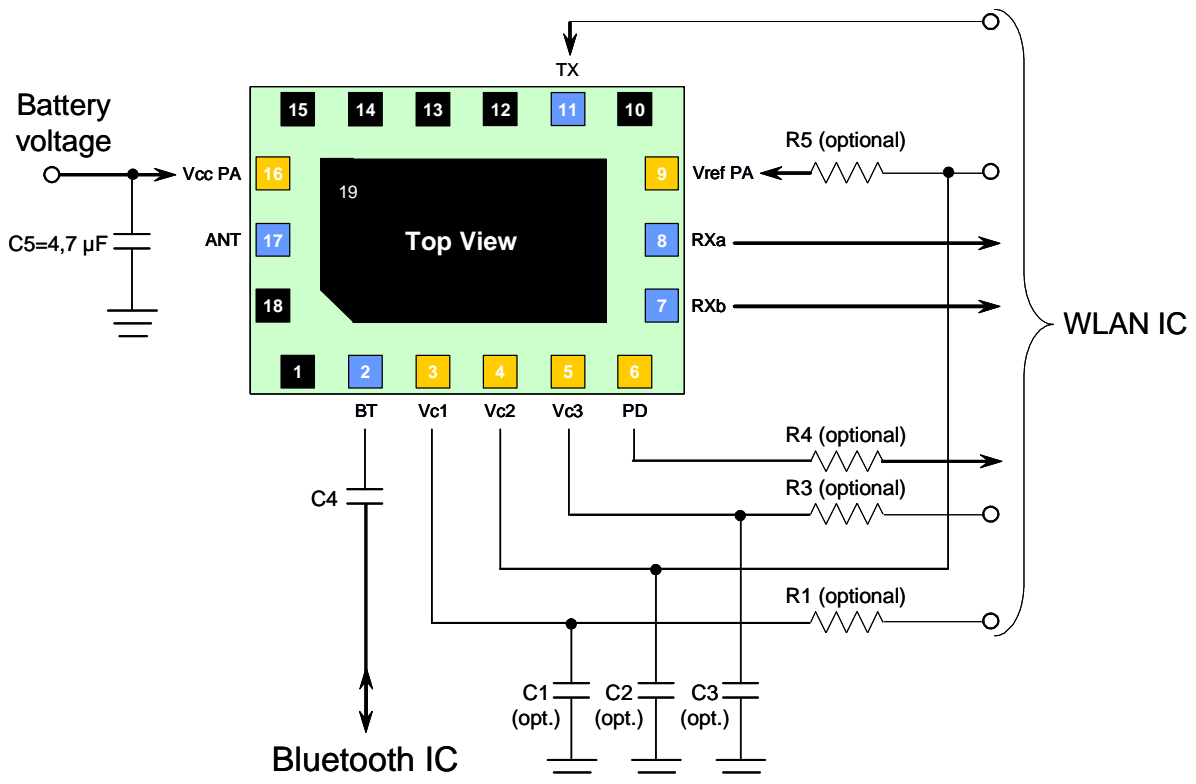

**Preliminary Data**

TX control pin of the switch (Vc2) should be connected with the line used to turn the PA on and off. In this case, the switch TX control will be always "high" when the PA is on. This significantly reduces the level of the signal reflected to the PA output and guarantees that the PAs are not damaged.

**For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com) .**

Published by EPCOS AG  
Surface Acoustic Wave Components Division  
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

## Preliminary Data

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).