

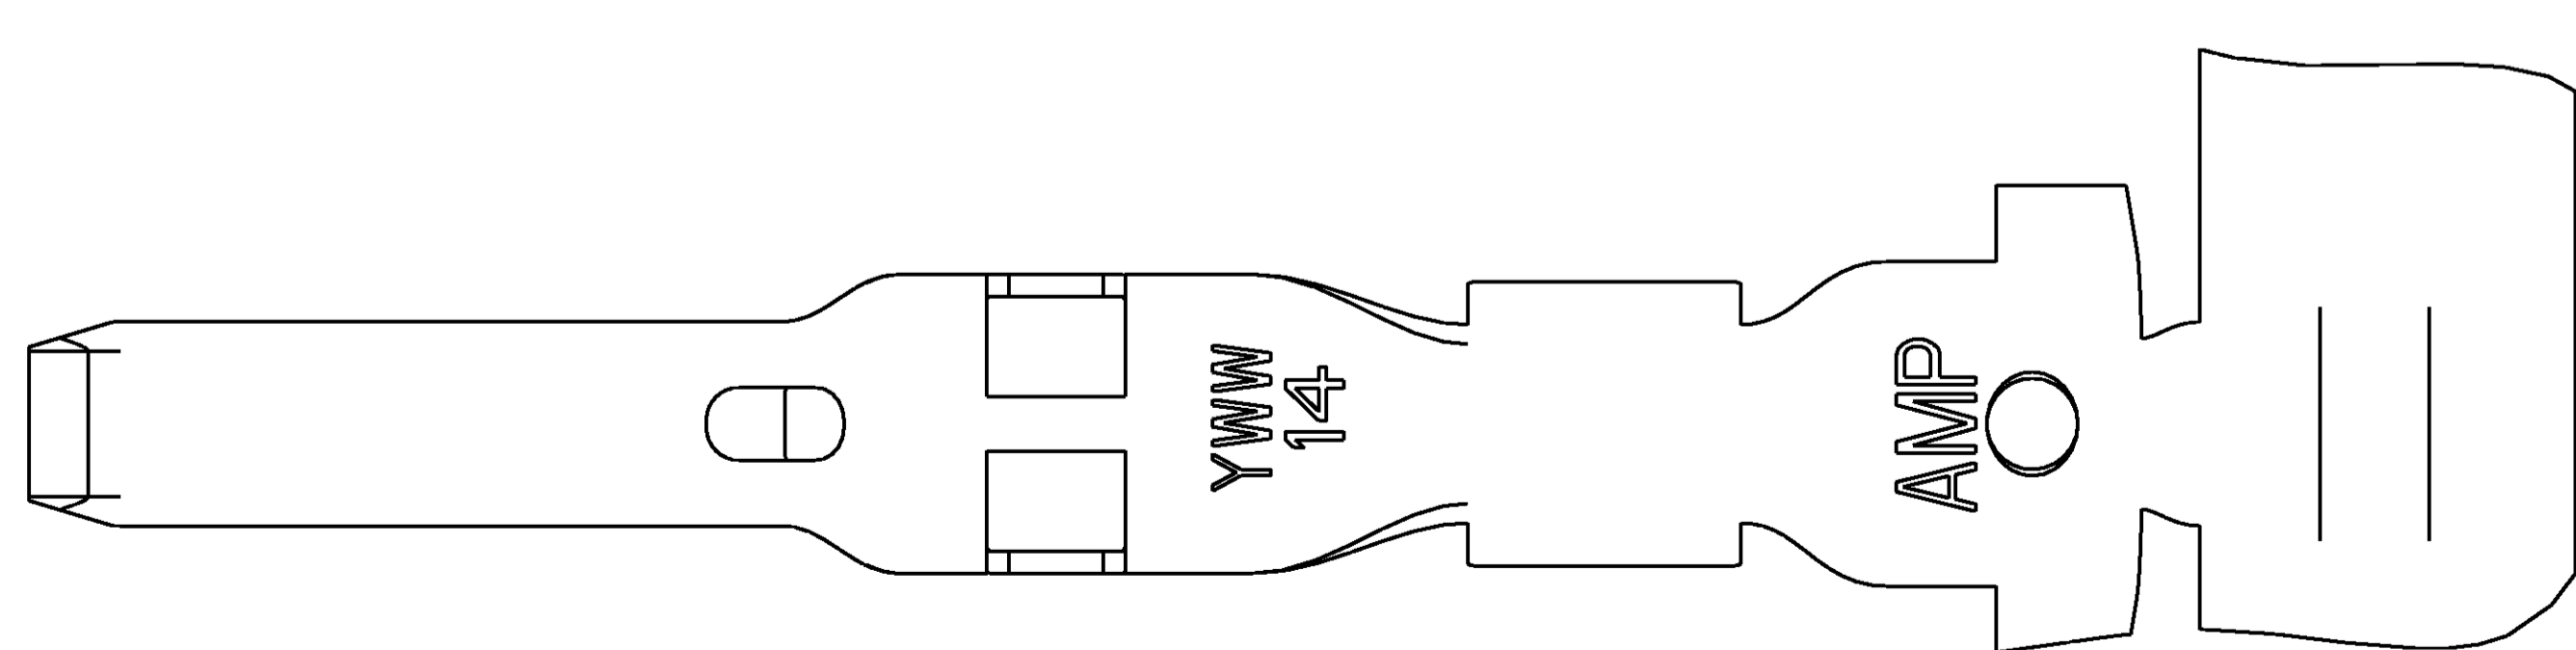


DETAIL A
SCALE 20:1

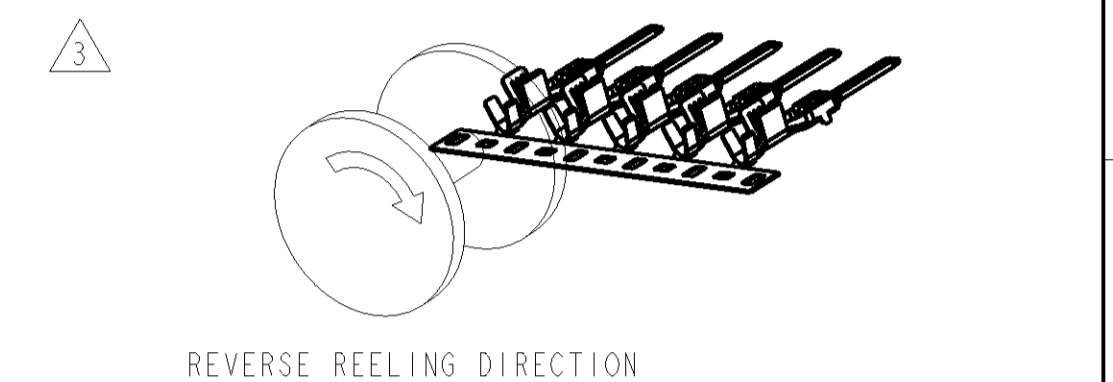


LOC	DIST	REVISIONS			
		REV	DATE	BY	CHKD
GE	00	D	17APR2002	AH	TW
		D1	02SEP2003	AH	TW
		E	23MAR2004	AG	TW
		F	17NOV2005	DLD	JLT

△ MATERIAL: 0.30 THICK COPPER ALLOY, PREPLATED WITH 0.0008 MINIMUM THICK MATTE TIN (ELV COMPLIANT).

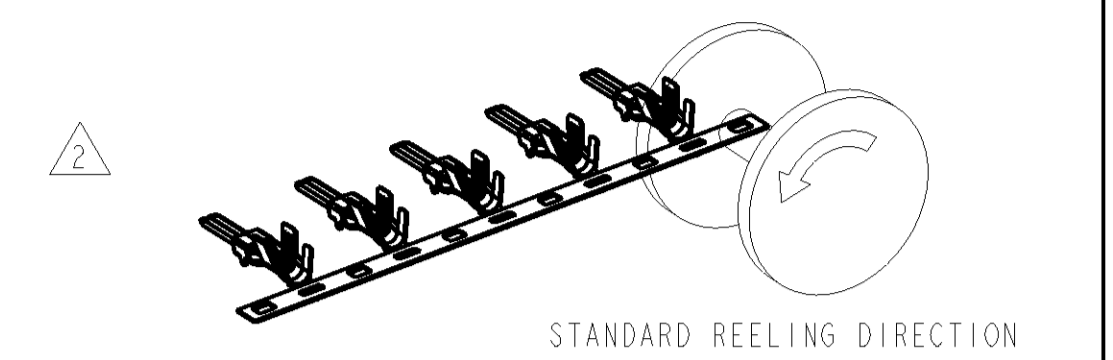

4. QUALIFICATION OF THE CRIMP APPLICATION TOOLING SHALL BE CONTROLLED BY THE REQUIREMENTS ESTABLISHED UNDER USCAR 21.
5. LOOSE END SPlicing TO BE USED.

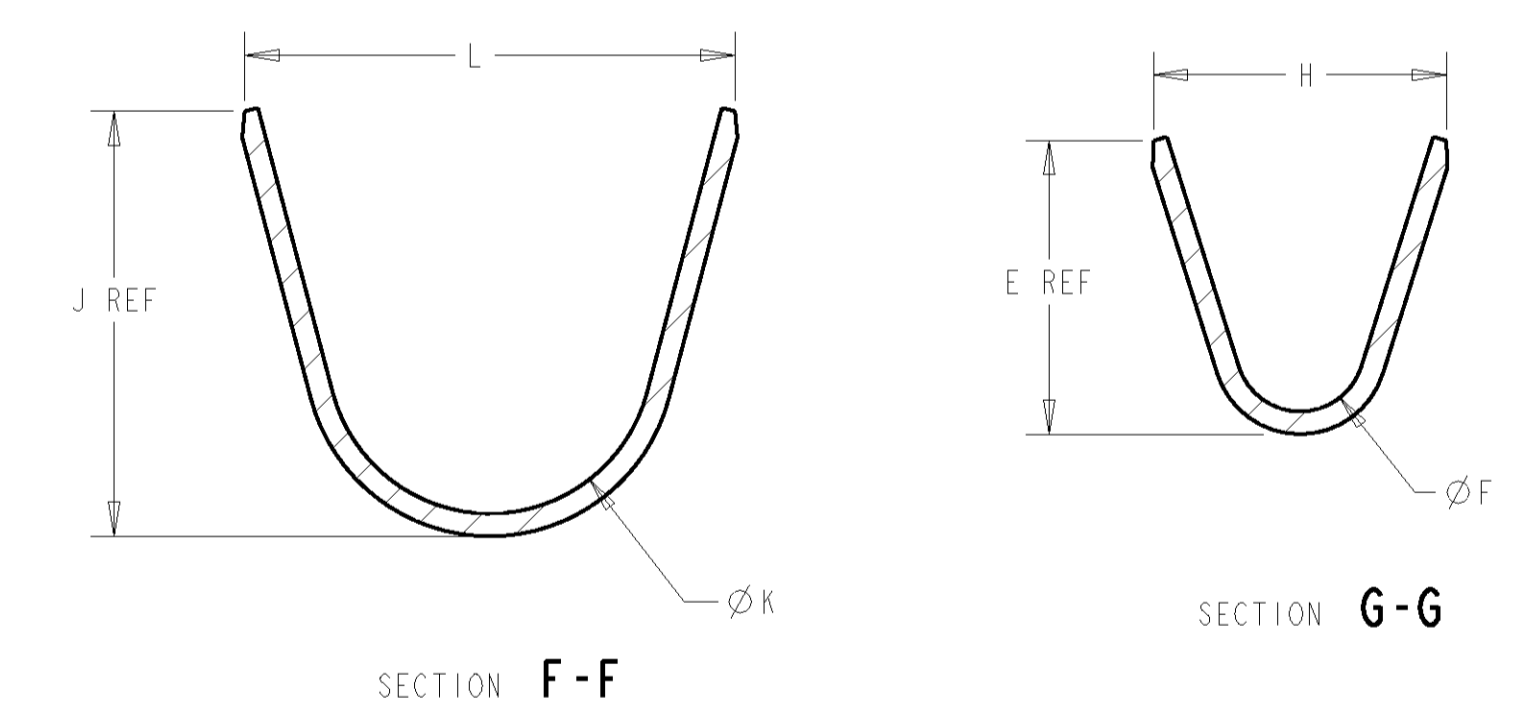

REELING	N	L	ØK	J	H	ØF	E	WIRE SIZE	PART NO.	
3	1-1326031-1 REELED FOR AMP APPLICATORS								12 AWG	1-1326031-2
	1.35	6.8	4.30	5.89	4.7	2.7	5.25	12 AWG	1-1326031-1	
	1326031-5 REELED FOR AMP APPLICATORS								14 AWG	1-1326031-0
	1326031-4 REELED FOR AMP APPLICATORS								16 AWG	1326031-9
	1326031-3 REELED FOR AMP APPLICATORS								18 AWG	1326031-8
2	1326031-2 REELED FOR AMP APPLICATORS								20 AWG	1326031-7
	1326031-1 REELED FOR AMP APPLICATORS								22 AWG	1326031-6
	1.35	6.5	4.30	5.62	3.9	1.70	3.88	14 AWG	1326031-5	
2	1.10	5.6	3.80	4.54	3.9	1.70	3.88	16 AWG	1326031-4	
	1.10	5.6	3.80	4.54	3.3	1.30	2.76	18 AWG	1326031-3	
	0.90	5.0	3.40	4.11	3.3	1.30	2.76	20 AWG	1326031-2	
	0.90	5.0	3.40	4.11	2.5	0.90	2.11	22 AWG	1326031-1	

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 2 PLC ±0.10 3 PLC ±0.15 4 PLC ±0.20 ANGLES ±0.5°		DWN D. STRAUSSER 28APR99 CHK D. BROWN 28APR99 APVD D. BROWN 28APR99		Tyco Electronics Harrisburg, PA 17105-3608	
MATERIAL:		FINISH:		PRODUCT SPEC: SAE/USCAR-2 8/97 APPLICATION SPEC: 114-13013		NAME: 2.8mm BLADE, SEALED SIZE: 00779 DRAWING NO: 1326031	
CUSTOMER DRAWING				SCALE: 10:1		SHEET 1 OF 1 REV F	