



Electrical Specifications

Cutoff Frequency (Fc): 329 MHz
Passband: 329-1000 MHz
Passband Insertion Loss : 3.0dB Max.
Passband Return Loss: 14dB Min.
Rejection: 50 dB Min. @ 0-167 MHz


Mechanical

Connector Type: SMA(F) & SMA(M)
Dimensions: 2.5" x 0.75" x 0.5"

Environmental

Operating Temperature: -25°C to +70°C
Storage Temperature: -60°C to +90°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200Hz

Outline Drawing:

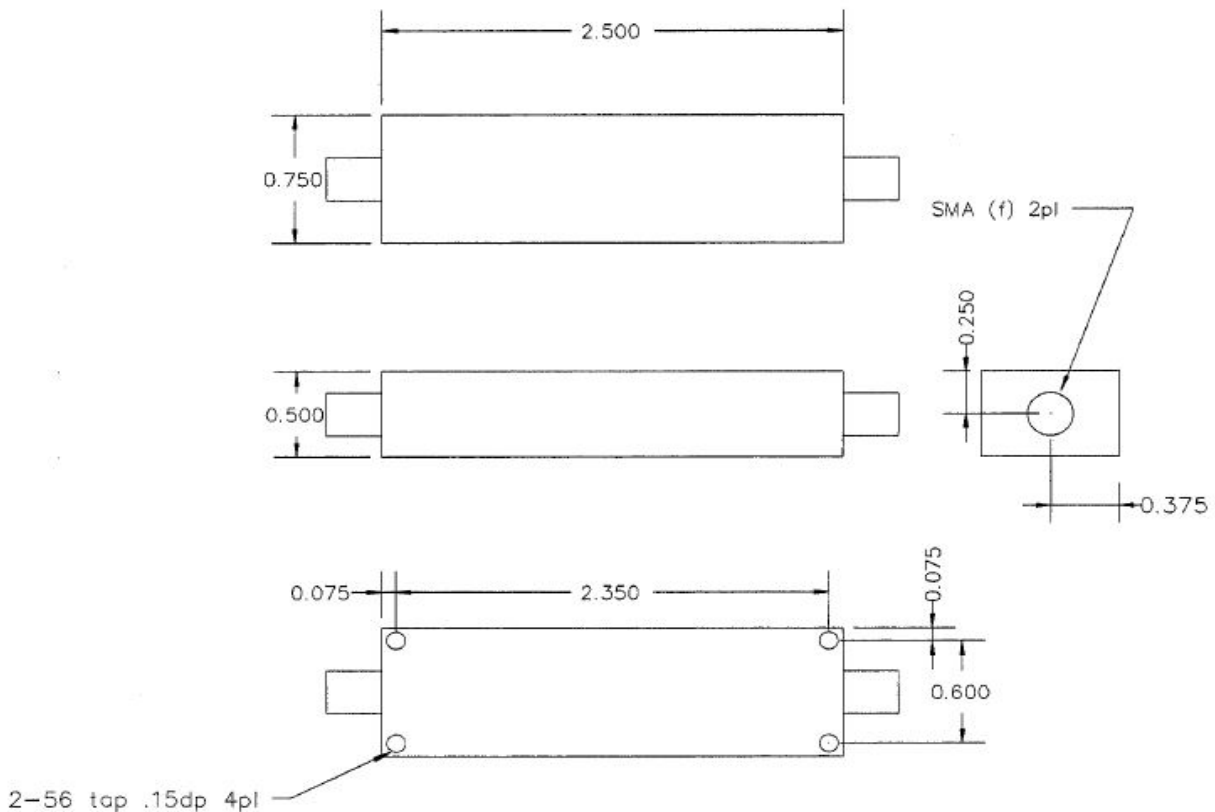



Response Plot :

