

Low Noise, Rail-to-Rail Input/Output Dual Operational Amplifier

■ GENERAL DESCRIPTION

The NJM2737 is a Rail-to-Rail Input/Output single supply dual operational amplifier featuring low voltage operation, low power and low noise. It is designed to offer a low voltage operating from 1.8V with a $5\text{nV}/\sqrt{\text{Hz}}$ low noise of the conventional low noise operational amplifiers such as the NJM4580 and NJM 5532.


The Combination of Rail-to-Rail Input/Output, low voltage operation and low noise makes the NJM2737 well-suited for single supply low voltage operation applications such as PC audio, portable audio and others. The NJM2737 is available in a wide variety packages 8-lead DIP, and 8-lead surface-mount packages of SOP (DMP), SSOP and MSOP (TVSP).

■ FEATURES

- Operating Voltage 1.8 to 6V
- Low Input Voltage Noise $5\text{nV}/\sqrt{\text{Hz}}$ typ.
- Gain Band Width product 3.1MHz typ. (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Slew Rate $0.7\text{V}/\mu\text{s}$ typ. (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Offset Voltage 5mV max
- Rail-to-Rail Input $V_{ICM}= 0$ to 5V (at $V^+=5\text{V}$)
- Maximum Output Voltage1 $V_{OH1} \geq 4.9\text{V}$ / $V_{OL1} \leq 0.15\text{V}$ (at $V^+=5\text{V}$, $R_L=20\text{k}\Omega$)
- Maximum Output Voltage2 $V_{OH2} \geq 4.75\text{V}$ / $V_{OL2} \leq 0.25\text{V}$ (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Bipolar Technology
- Package Outline DIP8, DMP8, SSOP8, MSOP8 (TVSP8) MEET JEDEC MO-187-DA / THIN TYPE


■ PIN CONFIGURATION

(Top View)

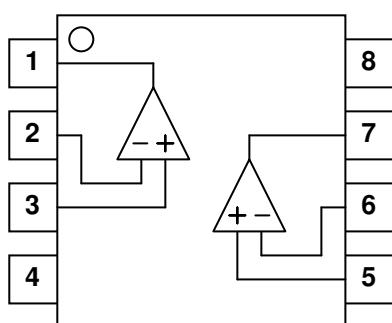


PIN CONFIGURATION


- 1.OUTPUT1
- 2.-INPUT1
- 3.+INPUT1
- 4.GND(V)
- 5.+INPUT2
- 6.-INPUT2
- 7.OUTPUT2
- 8.V⁺



NJM2737D
(DIP8)



NJM2737M
(DMP8)



NJM2737V
(SSOP8)



NJM2737RB1
(MSOP8 (TVSP8))

NJM2737

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	7	V
Differential Input Voltage	V _{ID}	±1	V
Input Common Mode Voltage Range	V _{ICM}	0 to 7	V
Power Dissipation	P _D	500(DIP8) 300(DMP8) 250(SSOP8) 320(MSOP8 (TVSP8))	mW
Operating Temperature Range	To _{pr}	-40 to 85	°C
Storage Temperature Range	T _{stg}	-40 to 125	°C

(Note1) If the supply voltage (V⁺) is less than 7V, the input voltage must not over the V⁺ level through 7V is limit specified.

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺	1.8 to 6	V

■ ELECTRICAL CHARACTERISTICS

• DC CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I _{CC}	No Signal	-	1200	1600	μA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	200	800	nA
Input Offset Current	I _{IO}		-	5	100	nA
Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 2.5V ≤ V _{CM} ≤ 5V, CMR-: 0 ≤ V _{CM} ≤ 2.5V (Note2)	55	70	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /GND = ±2 to ±3V	70	85	-	dB
Maximum Output Voltage 1	V _{OH1}	R _L =20kΩ	4.9	4.95	-	V
	V _{OL1}	R _L =20kΩ	-	0.1	0.15	
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	4.75	4.85	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	
Input Common Mode Voltage Range	V _{ICM}	CMR > 55dB	0	-	5	V

(Note2) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 2.5V ≤ V_{CM} ≤ 5V and CMR- is measured with 0V ≤ V_{CM} ≤ 2.5V .

• AC CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	R _L =2kΩ	-	3.1	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	85	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.7	-	V/μs

• DC CHARACTERISTICS(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I _{CC}	No Signal	-	1000	1500	μA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	200	800	nA
Input Offset Current	I _{IO}		-	5	100	nA
Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 1.5V ≤ V _{CM} ≤ 3V, CMR-: 0 ≤ V _{CM} ≤ 1.5V (Note3)	48	63	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /GND = ±1.2 to ±2V	68	83	-	dB
Maximum Output Voltage1	V _{OH1}	R _L =20kΩ	2.9	2.95	-	V
	V _{OL1}	R _L =20kΩ	-	0.1	0.15	
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	2.75	2.85	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	
Input Common Mode Voltage Range	V _{ICM}	CMR > 48dB	0	-	3	V

(Note3) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 1.5V ≤ V_{CM} ≤ 3V and CMR- is measured with 0V ≤ V_{CM} ≤ 1.5V .**• AC CHARACTERISTICS**(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	R _L =2kΩ	-	2.6	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	85	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.6	-	V/μs

NJM2737

• DC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I _{CC}	No Signal	-	1000	1500	μA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	200	800	nA
Input Offset Current	I _{IO}		-	5	100	nA
Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 0.9V ≤ V _{CM} ≤ 1.8V, CMR-: 0 ≤ V _{CM} ≤ 0.9V (Note4)	40	55	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /GND = ±0.9 to ±1.2V	65	80	-	dB
Maximum Output Voltage1	V _{OH1}	R _L =20kΩ	1.7	1.75	-	V
	V _{OL1}	R _L =20kΩ	-	0.1	0.15	
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	1.6	1.65	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	
Input Common Mode Voltage Range	V _{ICM}	CMR > 40dB	0	-	1.8	V

(Note4) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 0.9V ≤ V_{CM} ≤ 1.8V and CMR- is measured with 0V ≤ V_{CM} ≤ 0.9V .

• AC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)




PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	R _L =2kΩ	-	2.3	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	85	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS







(V⁺=1.8V, Ta=25°C)







PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.5	-	V/μs







■ TERMINAL CHARACTERISTICS

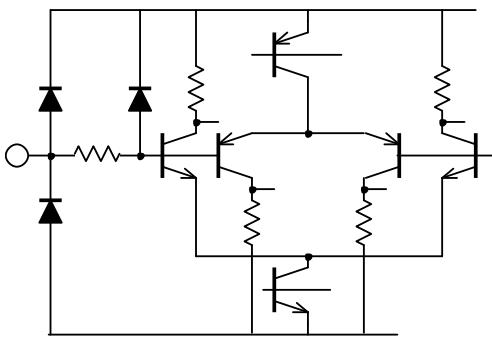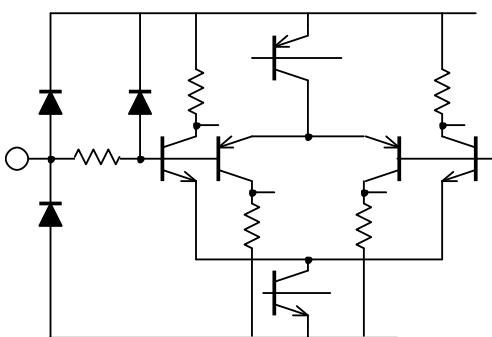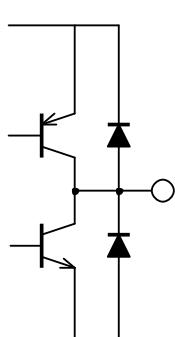No.	Symbol	Equivalent Circuit	Typ.DC Voltage(V)	Function
3,5	+INPUT			non-inverting input
2,6	-INPUT			inverting input
1,7	VOUT			output

■ TYPICAL CHARACTERISTICS

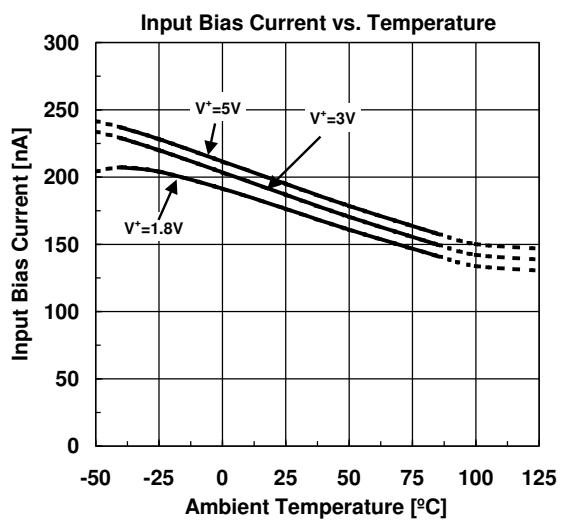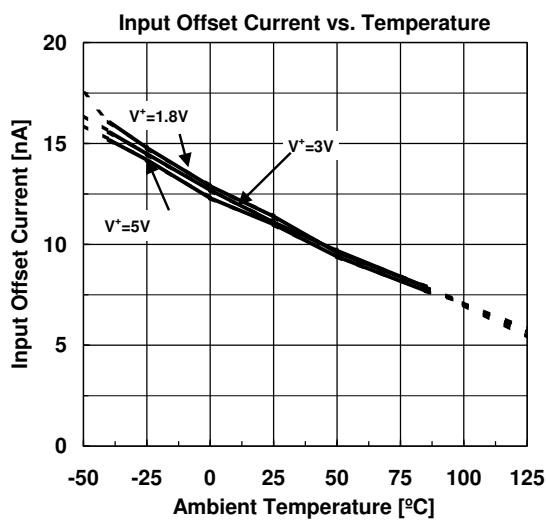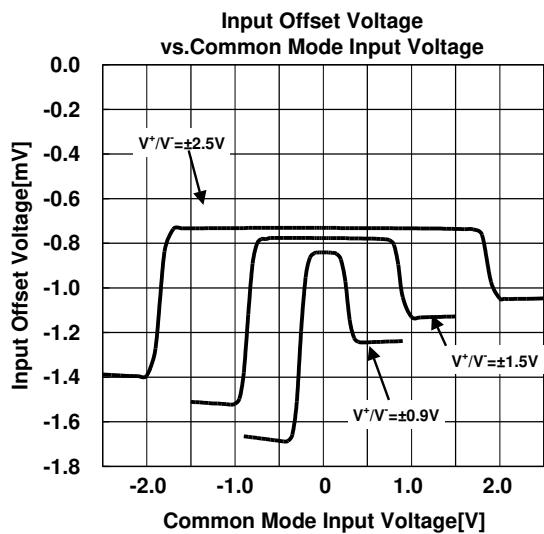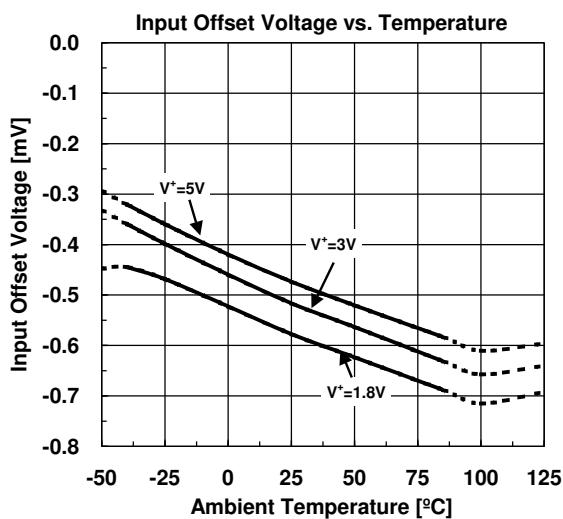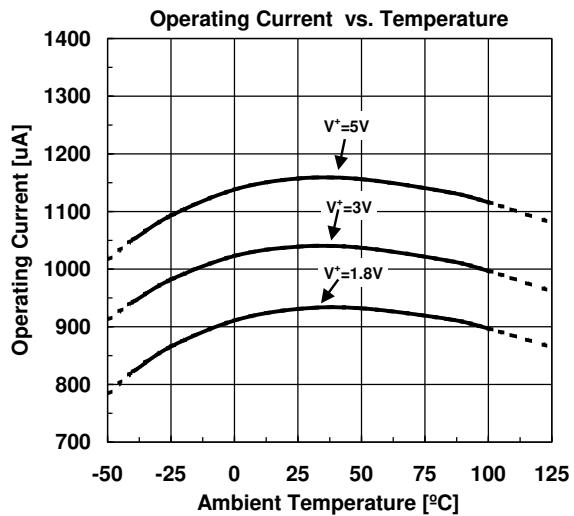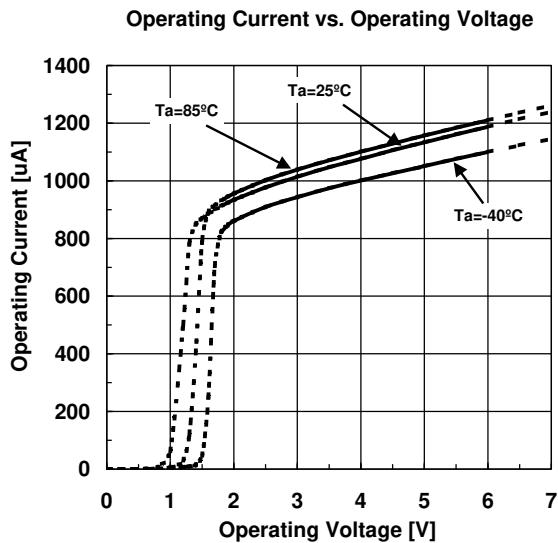


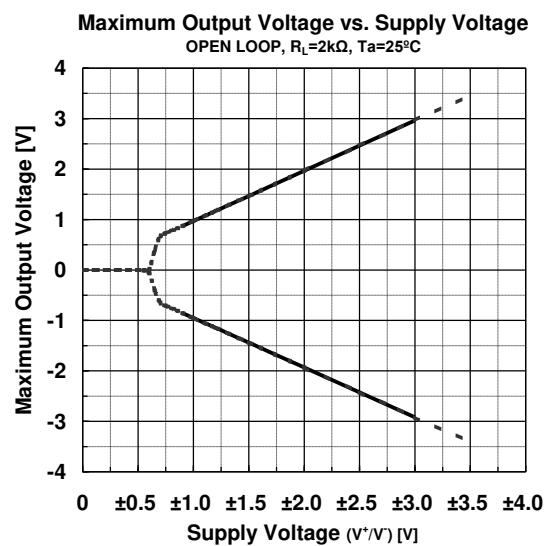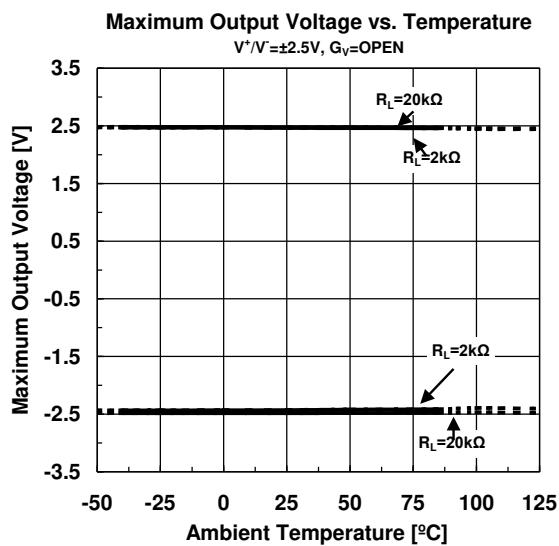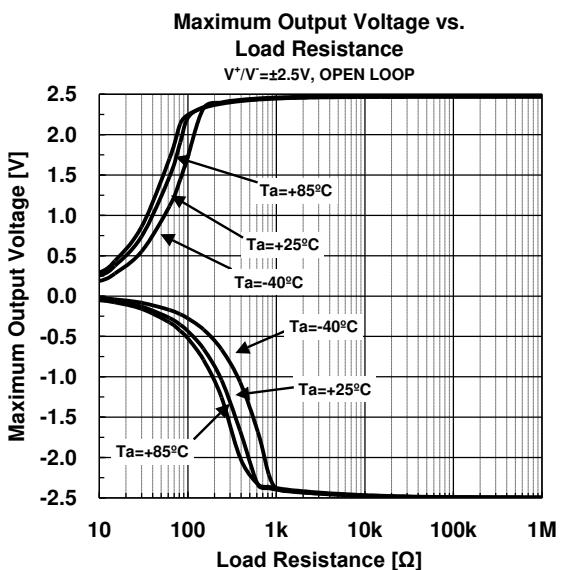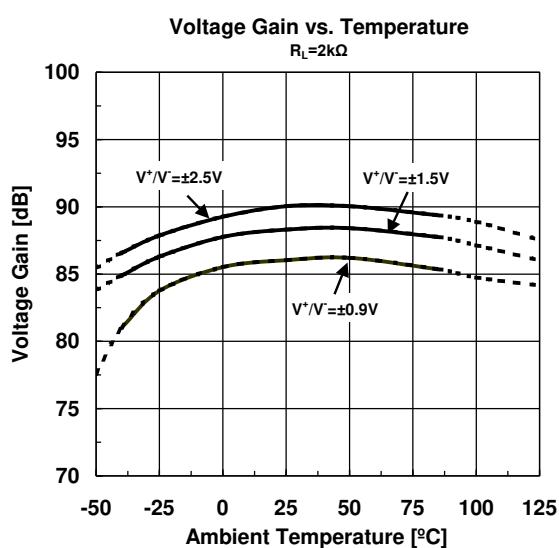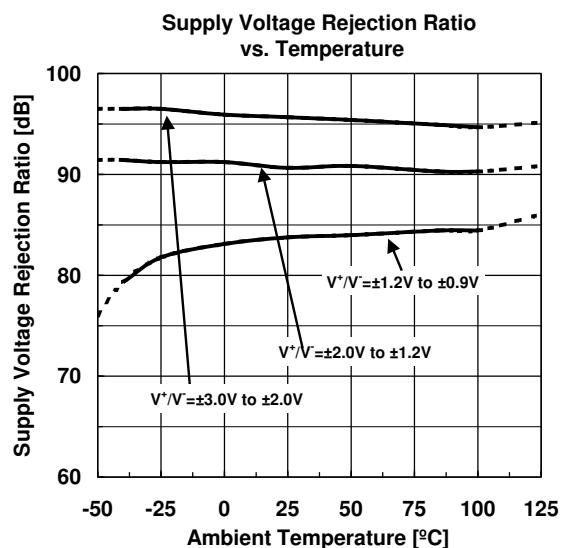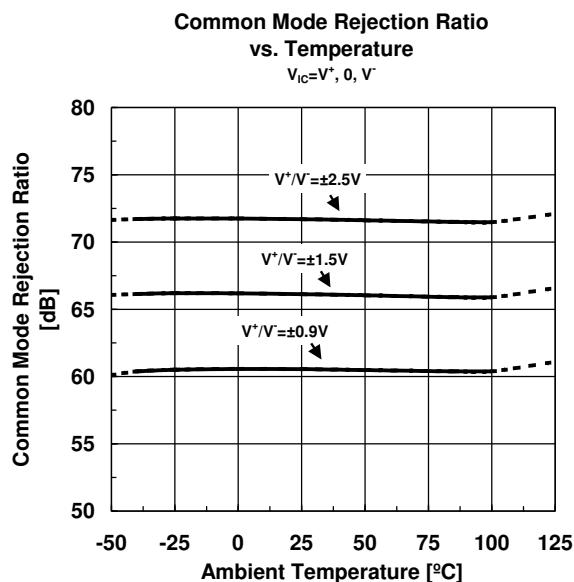

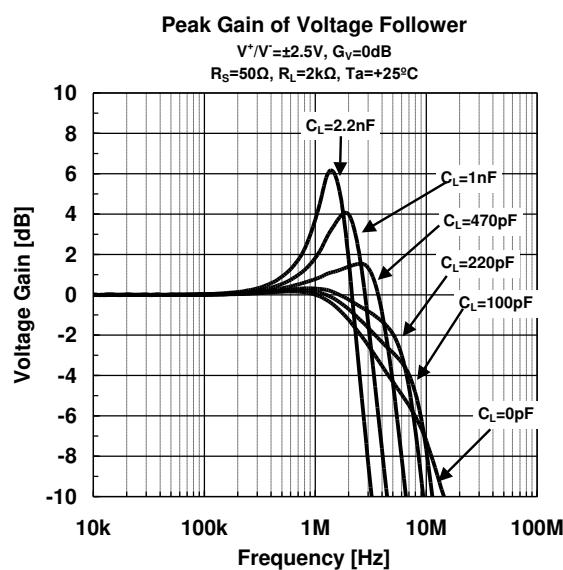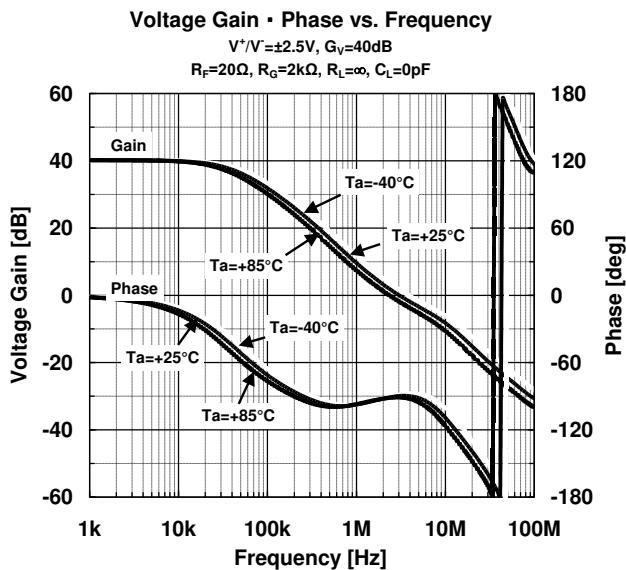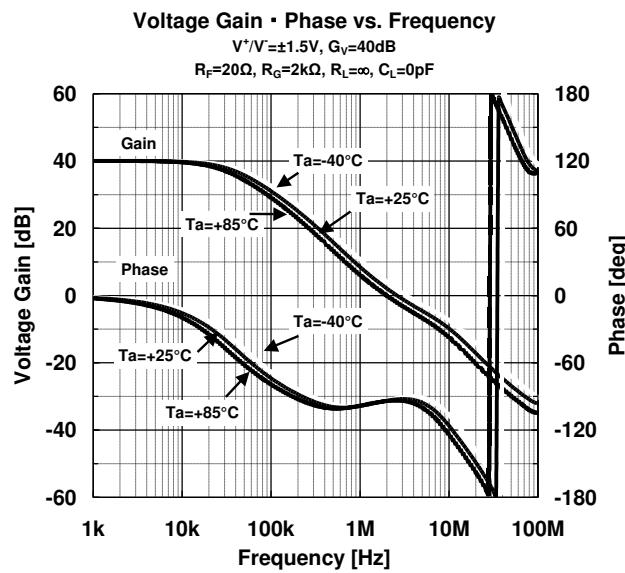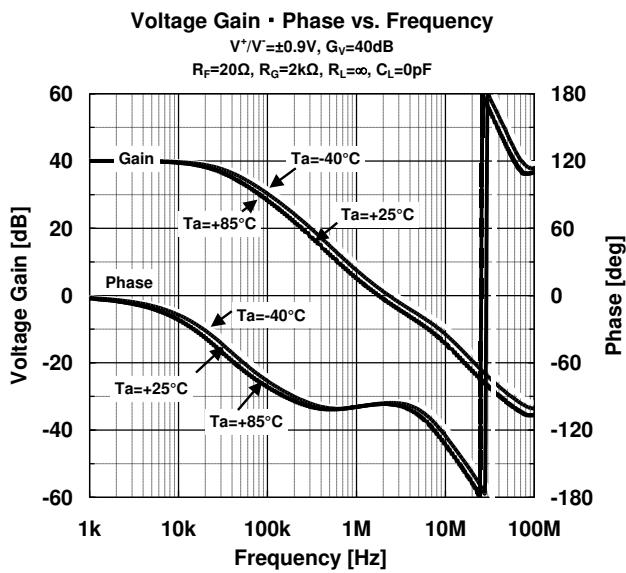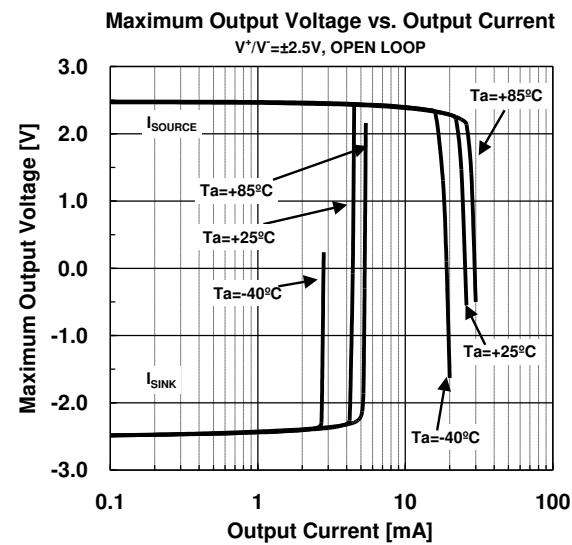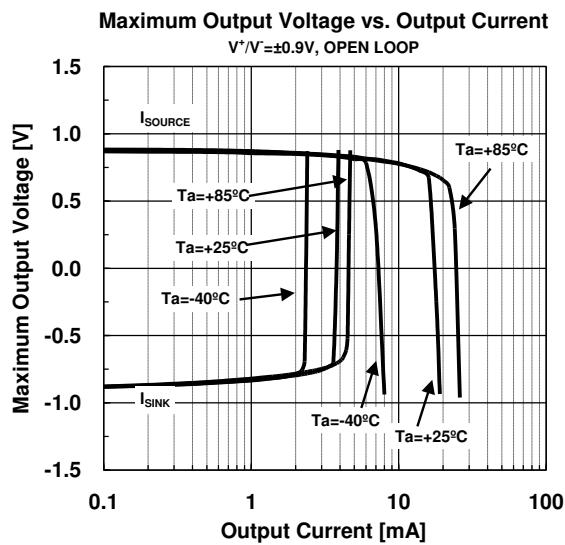

Input Voltage Noise Density vs. Frequency


$GV=40\text{dB}$, $R_S=50\Omega$, $R_G=20\Omega$,
 $R_F=2\text{k}\Omega$, $CL=0\text{pF}$, $T_a=25^\circ\text{C}$

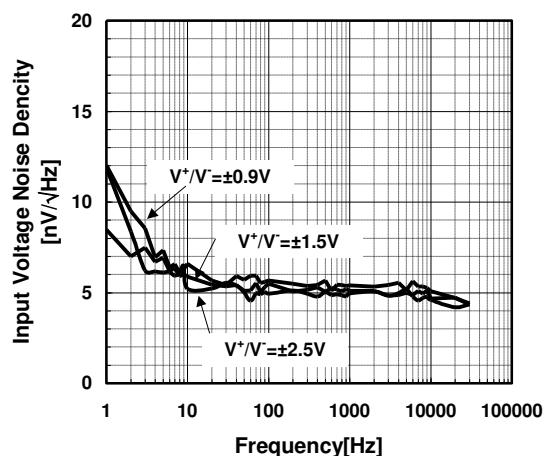

TOTAL HARMONIC DISTORTION + NOISE

vs OUTPUT AMPLITUDE


(Voltage Follower)
 $V^+/V^- = \pm 2.5\text{V}$, $GV=20\text{dB}$
 $R_L=2\text{k}\Omega$, $T_a=25^\circ\text{C}$

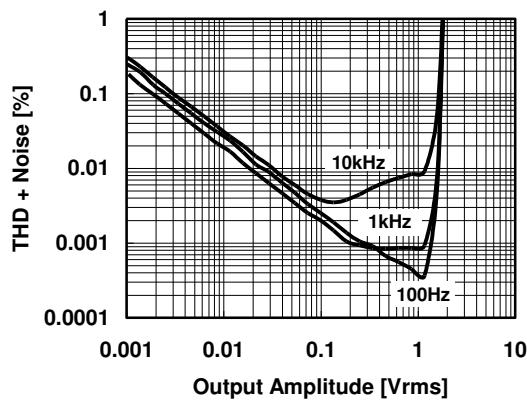


TOTAL HARMONIC DISTORTION + NOISE

vs OUTPUT AMPLITUDE


(x10 Amplifier)
 $V^+/V^- = \pm 2.5\text{V}$, $GV=20\text{dB}$
 $R_L=2\text{k}\Omega$, $T_a=25^\circ\text{C}$

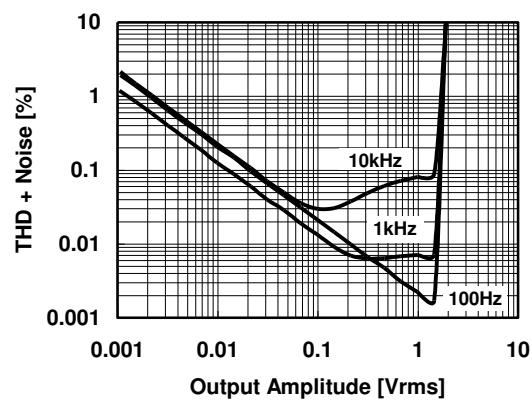


Positive Transient Response
 $V^+/V = \pm 0.9V$, $GV = 0dB$, $f = 10kHz$, $V_{IN} = 0.5V_{PP}$
 $R_S = 50\Omega$, $RL = 2k\Omega$, $CL = 0pF$, $Ta = +25^\circ C$

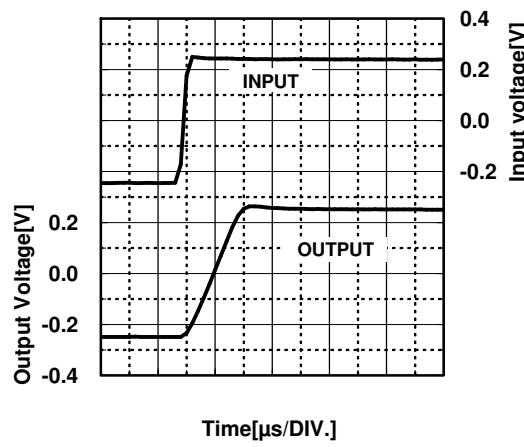


Negative Transient Response
 $V^+/V = \pm 0.9V$, $GV = 0dB$, $f = 10kHz$, $V_{IN} = 0.5V_{PP}$
 $R_S = 50\Omega$, $RL = 2k\Omega$, $CL = 0pF$, $Ta = +25^\circ C$

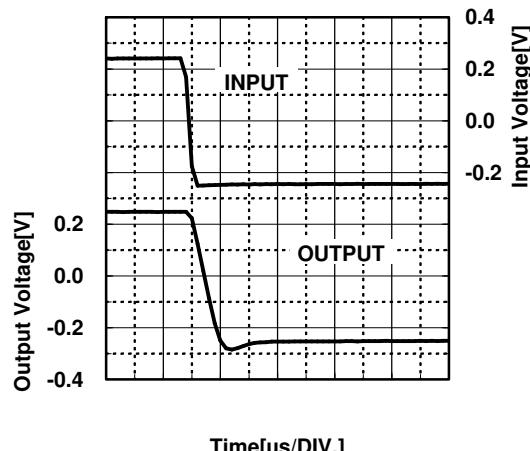

Positive Transient Response
 $V^+/V = \pm 1.5V$, $GV = 0dB$, $f = 10kHz$, $V_{IN} = 1V_{PP}$
 $R_S = 50\Omega$, $RL = 2k\Omega$, $CL = 0pF$, $Ta = +25^\circ C$

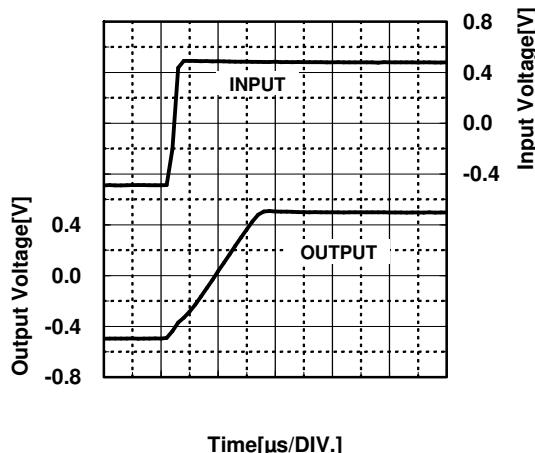

Negative Transient Response
 $V^+/V = \pm 1.5V$, $GV = 0dB$, $f = 10kHz$, $V_{IN} = 1V_{PP}$
 $R_S = 50\Omega$, $RL = 2k\Omega$, $CL = 0pF$, $Ta = +25^\circ C$

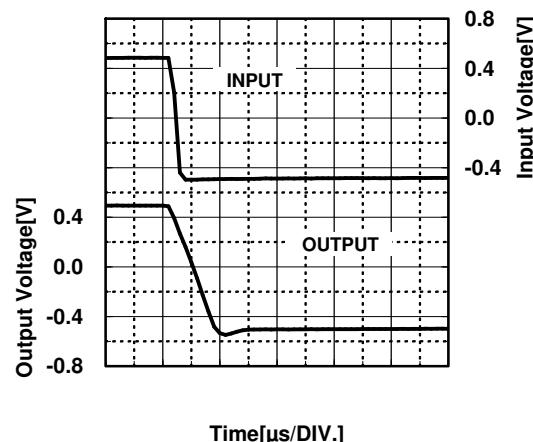

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.