



Units: mm

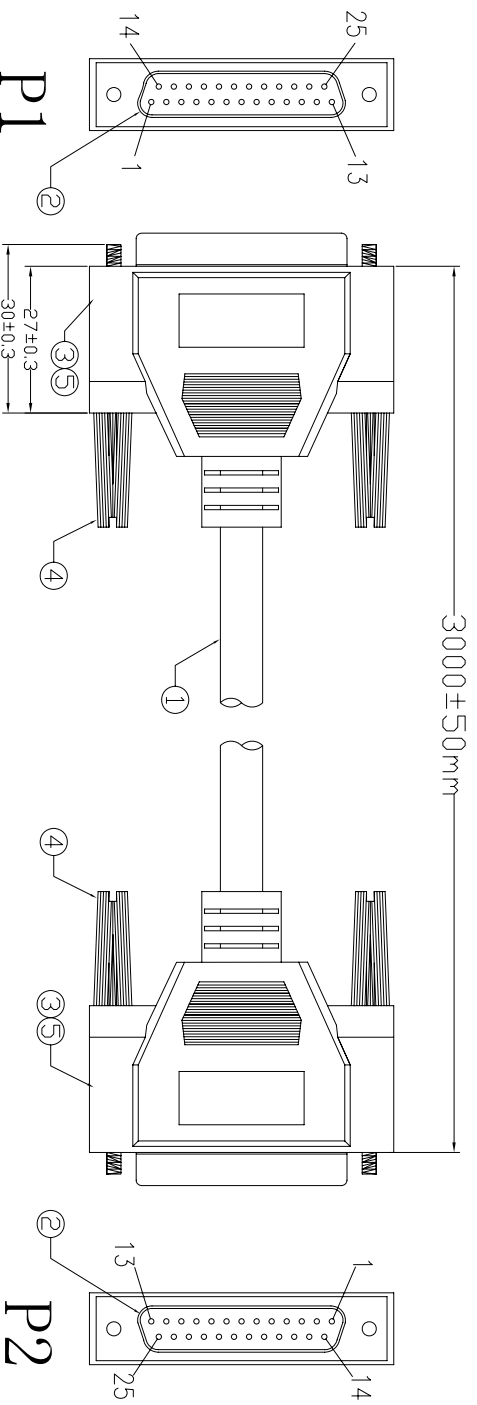

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

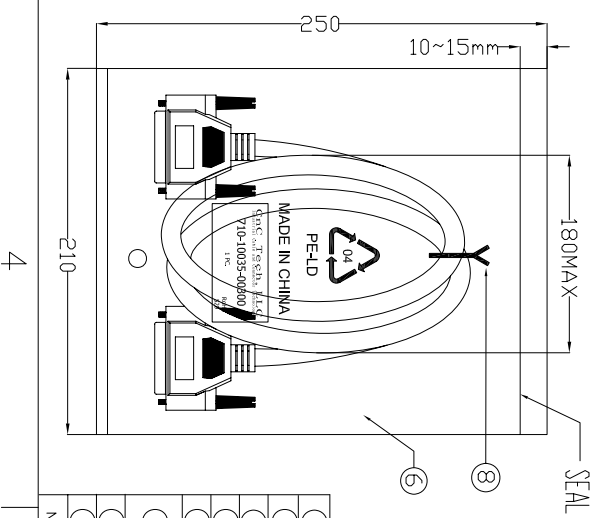

NO.	TIE	QTY	NAME	SPECIFICATION
⑧	PE BAG	1/5	WHITE L=120mm	
⑦	PE BAG	1/5	CLEAR SIZE: 360*380*0.05mm PRINT BLACK"MADE IN CHINA"+ "5PCS"	
⑥	PE BAG	1	CLEAR SIZE: 210*250*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"	
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1.5*20MM	
④	SCREW	4	#4--40UNC TYPE L=30mm,NICKEL PLATED,MOLD:BEIGE(V--29) ABS	
③	IN JACKET	18g	CLEAR LD-PE (Mould NO.:NM--33)	
②	CONN	2	DB 25P FEMALE SODER TYPE PIN G/F SHELL N--PLATED INSULATOR COLOR:BLUE	
①	CABLE	1	NOUL 28AWG(7/0.12)*25C+D+AL/MY 007.5mm JACKET BEIGE(V--29) L=3000±15MM	

PIN ASSIGNMENT		
P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	PURPLE	8
9	GREY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	RED/BLACK	13
14	ORANGE/BLACK	14
15	YELLOW/BLACK	15
16	GREEN/BLACK	16
17	BLUE/BLACK	17
18	PURPLE/BLACK	18
19	WHITE/BLACK	19
20	RED/WHITE	20
21	ORANGE/WHITE	21
22	GREEN/WHITE	22
23	BLUE/WHITE	23
24	PURPLE/WHITE	24
25	BROWN/WHITE	25
SHELL	DRAIN WIRE	SHELL

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	YIFONG	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	710-10035-00300
DECIDE BY		DATE	2012-02-06
VERSIONS/EDITION	A/0	PROJECTION	