

Series: Ceramic Patch

TECHNICAL DATA SHEET

Description: 18.5x18.5x4.0mm

GPS/Glonass Pin Mount

PART NUMBER: W3208



Features:

- 1575 / 1602 MHz Dualband singe feed antenna
- Size 18.5 x 18.5 x 4 mm
- RHCP Polarization
- Zenith Gain +2 / 3.5 dBic
- Pin mounting
- Tray packing
- RoHS Compliant

Applications:

- GPS and Glonass satellite receivers
- Tracking, Navigation, Satellite Positioning
- Fleet management
- Asset tracking

All dimensions are in mm / inches

Issue: 1910P

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 LISA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998

Preliminary



RHCP

Description: 18.5x18.5x4.0mm

GPS/Glonass Pin Mount

PART NUMBER: W3208

Series: Ceramic Patch

Polarization

ELECTRICAL SPECIFICATIONS

Antenna Type Patch Antenna

Frequency 1565-1585/1598-1606MHz

Nominal Impedance 50 Ω

Return Loss(GPS-C/A / GLONASS) -15dB/-9dB

Radiation Pattern Omni
Typical RHCP Gain @GPS 1dBic
Typical RHCP Gain @GLONASS 3dBic
Typical Efficiency @GPS 60%
Typical Efficiency @GLONASS 75%

MECHANICAL SPECIFICATIONS

Overall Length 18.5mm
Weight 6.23g

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature $-40 \sim 105 \,^{\circ}$ C Storage Temperature $-40 \sim 105 \,^{\circ}$ C

RoHS Compliant Yes






Description: 18.5x18.5x4.0mm


GPS/Glonass Pin Mount

PART NUMBER: W3208

Series: Ceramic Patch

MECHANICAL DRAWING

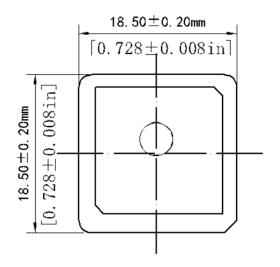

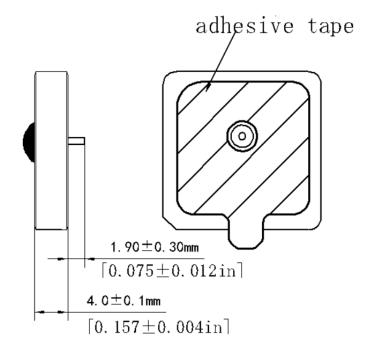




Description: 18.5x18.5x4.0mm

GPS/Glonass Pin Mount

PART NUMBER: W3208

Series: Ceramic Patch

TEST SETUP

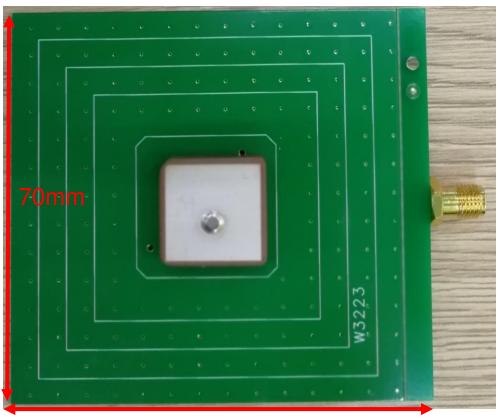

70mm

Test on 70mm*70mm GP.





Description: 18.5x18.5x4.0mm


GPS/Glonass Pin Mount

PART NUMBER: W3208


Series: Ceramic Patch

CHARTS

Return Loss vs Frequency

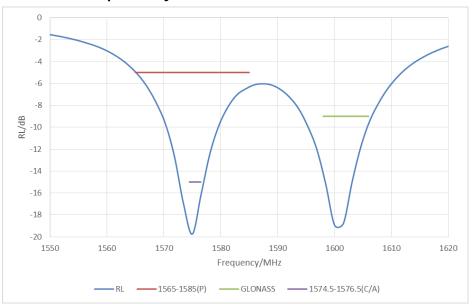

Axial Ratio vs Frequency

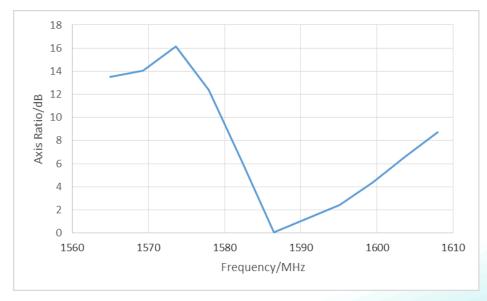

Issue: 1910P

Preliminary



Description: 18.5x18.5x4.0mm


GPS/Glonass Pin Mount

PART NUMBER: W3208


Series: Ceramic Patch

CHARTS

RHCP Gain vs Frequency

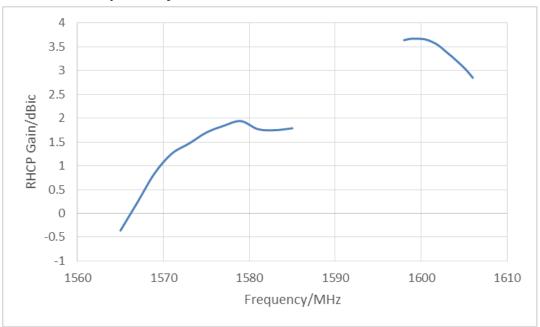

Radiation Efficiency vs Frequency

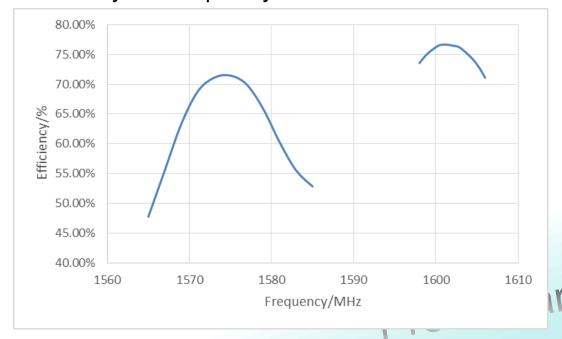

Issue: 1910P



Description: 18.5x18.5x4.0mm


GPS/Glonass Pin Mount


PART NUMBER: W3208


Series: Ceramic Patch

CHARTS

Radiation Pattern 2D/GLONASS

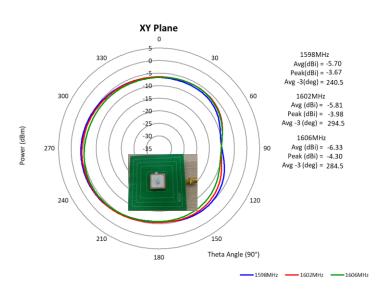

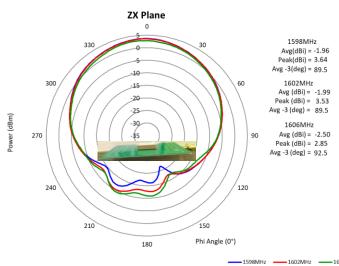

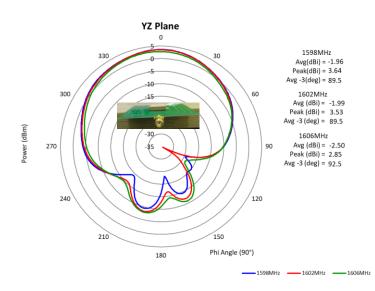

Preliminar



Description: 18.5x18.5x4.0mm


GPS/Glonass Pin Mount


PART NUMBER: W3208


Series: Ceramic Patch

CHARTS

Radiation Pattern 2D/GPS

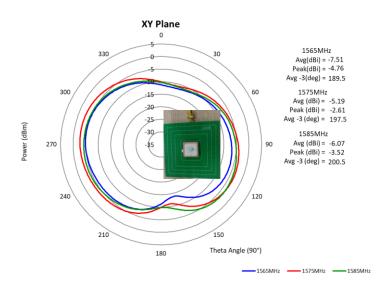

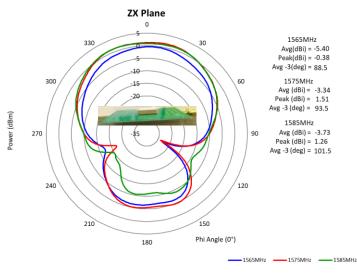

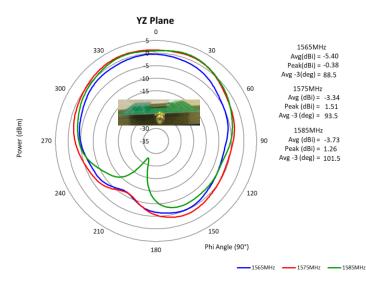





Series: Ceramic Patch

TECHNICAL DATA SHEET

Description: 18.5x18.5x4.0mm

GPS/Glonass Pin Mount

PART NUMBER: W3208

PACKAGING

Per package base 50 elements

Per vacuum bag 6 package bases

Per inner box 1 vacuum bag

Per package 4 inner boxes (1200 elements)

