

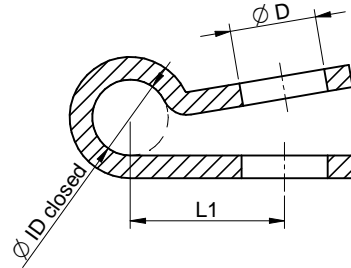


sectional drawing A-A

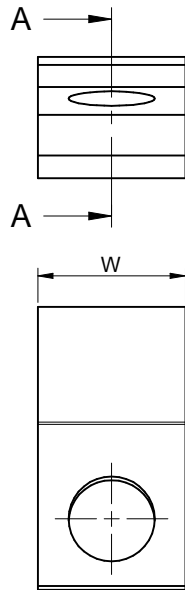

Scale - 3:1

Order Code	L1 (mm)	W (mm)	ØD (mm)	ØID closed (mm)
500 910 500	6.8 ± 0.3	6.5 ± 0.3	3.8 ± 0.2	3.0 ± 0.2
500 911 000	8.2 ± 0.3	9.2 ± 0.3	5.4 ± 0.3	3.0 ± 0.2
500 912 000	8.9 ± 0.3	13.2 ± 0.3	5.4 ± 0.3	3.0 ± 0.2
500 912 500	6.4 ± 0.3	6.3 ± 0.3	3.7 ± 0.2	3.5 ± 0.2
500 913 000	10.2 ± 0.3	10.0 ± 0.3	5.4 ± 0.3	4.5 ± 0.2
500 913 500	10.2 ± 0.3	9.3 ± 0.3	5.0 ± 0.3	6.2 ± 0.3
500 915 500	13.2 ± 0.3	12.3 ± 0.3	5.4 ± 0.3	9.0 ± 0.3
500 916 500	16.0 ± 0.3	12.9 ± 0.3	5.4 ± 0.3	12.8 ± 0.3
500 917 000	17.1 ± 0.3	12.9 ± 0.3	4.8 ± 0.2	15.5 ± 0.3
500 917 500	20.2 ± 0.4	12.9 ± 0.3	5.4 ± 0.3	17.0 ± 0.3
500 918 000	21.2 ± 0.4	12.9 ± 0.3	5.4 ± 0.3	20.0 ± 0.3

Operating Temperatur: -30°C up to +85°C

				Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions	CREATED DaF	CHECKED SKI	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD		SIZE A4
				Max-Eyth-Str. 1 74638 Waldenburg Germany com. +49 79 42 945 - 0	DESCRIPTION AsCHCL Cable Clip		TECHNICAL REFERENCE	MATERIAL Nylon 66, natural		
				www.we-online.de eiSos@we-online.de	SIZE xxx xxx xxx	WEIGHT	STATUS Released	DATE 2016-09-01	BUSINESS UNIT eiCan	PAGE 1 / 1
REV.	FILE	DATE	BY		ORDER CODE 500 91x x00					



This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik eiSos GmbH & Co KG products are neither designed nor intended for use in areas such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc.. Würth Elektronik eiSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high safety and reliability functions or performance.