


# G3VM-61HR/61HR1/61HR2

MOS FET Relays SOP 6-pin, High-current and Low-ON-resistance Type

## MOS FET Relays in SOP 6-pin packages that achieve the low ON resistance and high switching capacitance of a mechanical relay

- Load voltage: 60 V
- 60-V Relay (61HR): Continuous load current of 2.3 A (4.6 A) max. \*
- 60-V Relay (61HR1): Continuous load current of 3.3 A (6.6 A) max. \*
- 60-V Relay (61HR2): Continuous load current of 4 A (8 A) max. \*

\* Values in parentheses are for connection C.

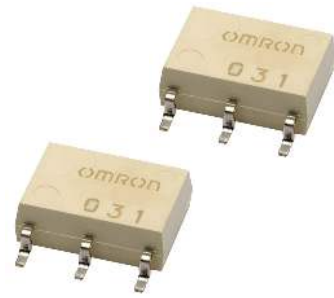

Note: The actual product is marked differently from the image shown here.



RoHS Compliant


### Application Examples

- Semiconductor test equipment
- Security equipment
- Amusement equipment
- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit

### Package

(Unit : mm, Average)

SOP 6-pin



Note: The actual product is marked differently from the image shown here.

### Model Number Legend

G3VM-□□□□□  
1 2 3 4 5

- 1. Load Voltage**  
6 : 60 V
- 2. Contact form**  
1 : 1a (SPST-NO)
- 3. Package**  
H : SOP 6-pin
- 4. Additional functions**  
R : Low ON resistance
- 5. Other informations**  
When specifications overlap, serial code is added in the recorded order.

### Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *		Stick packaging		Tape packaging	
				Connection A, B	Connection C	Model	Minimum package quantity	Model	Minimum package quantity
SOP6	1a (SPST-NO)	Surface-mounting Terminals	60 V	2.3 A	4.6 A	G3VM-61HR	75	G3VM-61HR(TR)	2,500
				3.3 A	6.6 A	G3VM-61HR1		G3VM-61HR1(TR05)	
				4 A	8 A	G3VM-61HR2		G3VM-61HR2(TR05)	

\* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

SOP


G3VM-61HR/61HR1/61HR2

### Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit	Measurement conditions	
Input	LED forward current	$I_F$	30			mA		
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3			mA/°C	Ta ≥ 25°C	
	LED reverse voltage	$V_R$	5		6	V		
Connection temperature		$T_J$	125			°C		
Load voltage (AC peak/DC)		$V_{OFF}$	60			V		
Output	Continuous load current	Connection A	$I_o$	2300	3300	4000	mA	Connection A: AC peak/DC Connection B and C: DC
		Connection B		4600	6600	8000		
		Connection C						
	ON current reduction rate	Connection A	$\Delta I_o/^\circ\text{C}$	-30.7	-33	-40	mA/°C	G3VM-61HR: Ta ≥ 50°C G3VM-61HR1/61HR2: Ta ≥ 25°C
		Connection B		-61.3	-66	-80		
Connection C								
Pulse ON current		$I_{op}$	7	10	12	A	t=100 ms, Duty=1/10	
Connection temperature		$T_J$	125			°C		
Dielectric strength between I/O *		$V_{I-O}$	1500			Vrms	AC for 1 min	
Ambient operating temperature		Ta	-40 to +85		-40 to +110	°C	With no icing or condensation	
Ambient storage temperature		Tstg	-55 to +125			°C		
Soldering temperature		-	260			°C	10 s	

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


#### Connection Diagram

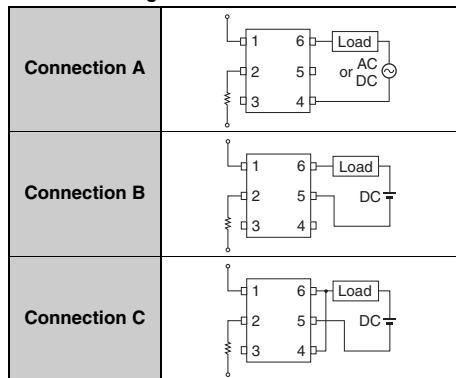

## Electrical Characteristics (Ta = 25°C)

Item		Symbol	G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit	Measurement conditions	
Input	LED forward voltage	V <sub>F</sub>	Minimum	1.18	1.50	V	I <sub>F</sub> =10 mA	
			Typical	1.33	1.65			
			Maximum	1.48	1.80			
	Reverse current	I <sub>R</sub>	Maximum	10			μA	V <sub>R</sub> =5 V
	Capacitance between terminals	C <sub>T</sub>	Typical	70			pF	V=0, f=1 MHz
Output	Trigger LED forward current	I <sub>FT</sub>	Typical	0.4	0.2	0.3	mA	G3VM-61HR : I <sub>o</sub> =100 mA G3VM-61HR1 : I <sub>o</sub> =2000 mA G3VM-61HR2 : I <sub>o</sub> =1000 mA
			Maximum	3				
	Release LED forward current	I <sub>FC</sub>	Minimum	0.1			mA	I <sub>OFF</sub> =10 μA
	Maximum resistance with output ON	R <sub>ON</sub>	Typical	Connection A	0.04	0.03	0.028	Ω
Connection B				0.02	0.015	0.014		
Connection C				0.01	0.008	0.007		
Connection A				0.07	0.06	0.04		
Connection B				0.04	–	0.02		
Connection C				–	–	0.01		
Current leakage when the relay is open	I <sub>LEAK</sub>	Typical	–			nA	V <sub>OFF</sub> = Load voltage ratings	
		Maximum	10	20	1000			
Capacitance between terminals	C <sub>OFF</sub>	Typical	1000	700	750	pF	V=0, f=1 MHz	
		Maximum	–	1500	–			
Capacitance between I/O terminals	C <sub>I-O</sub>	Typical	0.8			pF	f=1 MHz, V <sub>S</sub> =0 V	
Insulation resistance between I/O terminals	R <sub>I-O</sub>	Minimum	1000			MΩ	V <sub>I-O</sub> =500 VDC, R <sub>oH</sub> ≤60%	
		Typical	10 <sup>8</sup>					
Turn-ON time	t <sub>ON</sub>	Typical	1.0	0.6		ms	I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *	
		Maximum	5		2			
Turn-OFF time	t <sub>OFF</sub>	Typical	0.15	0.2	0.15	ms	I <sub>F</sub> =5 mA, R <sub>L</sub> =200 Ω, V <sub>DD</sub> =20 V *	
		Maximum	1		0.5			

\* Turn-ON and Turn-OFF Times

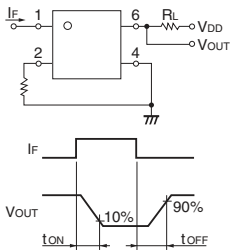

## Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	G3VM-61HR	G3VM-61HR1	G3VM-61HR2	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	Maximum	60	48	V
Operating LED forward current	I <sub>F</sub>	Minimum	5		mA
		Typical	7.5	10	
		Maximum	20	25	
Continuous load current (AC peak/DC)	I <sub>o</sub>	Maximum	1800	3300	4000
Ambient operating temperature	T <sub>a</sub>	Minimum	-20		°C
		Maximum	65	85	

## Spacing and Insulation


Item	Minimum	Unit
Creepage distances	4.0	mm
Clearance distances	4.0	
Internal isolation thickness	0.1	

## Engineering Data


### LED forward current vs. Ambient temperature

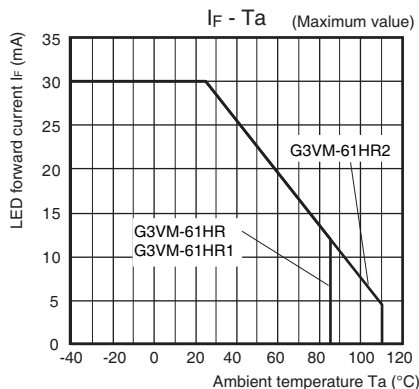


### Continuous load current vs. Ambient temperature

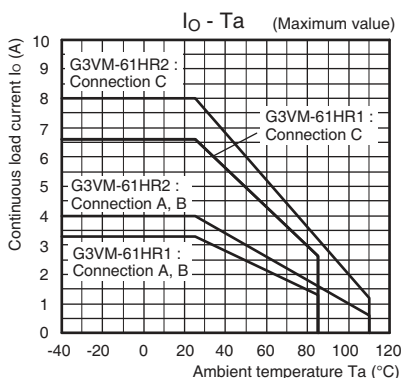


### G3VM-61HR

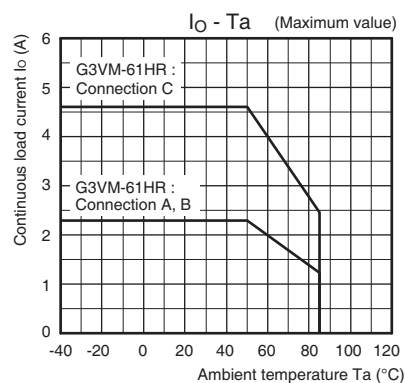


### LED forward current vs. LED forward voltage

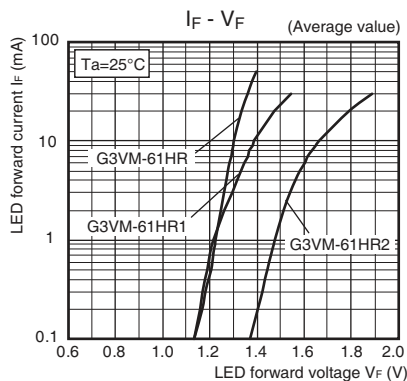


### Continuous load current vs. On-state voltage

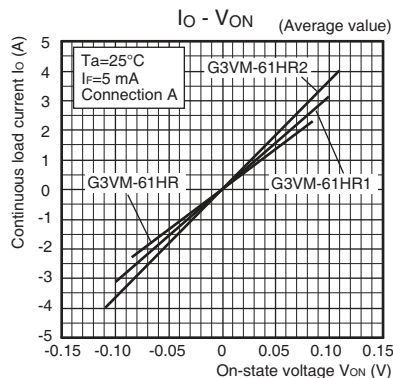


### On-state resistance vs. Ambient temperature

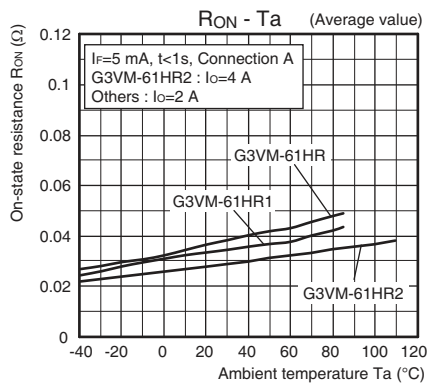

### Trigger LED forward current vs. Ambient temperature

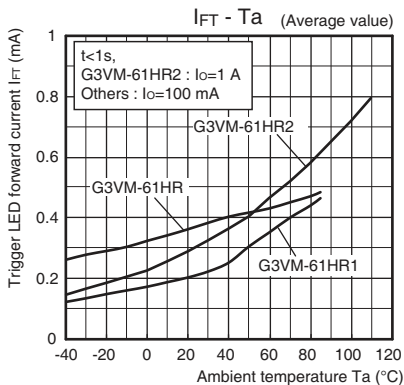


### Turn ON, Turn OFF time vs. LED forward current

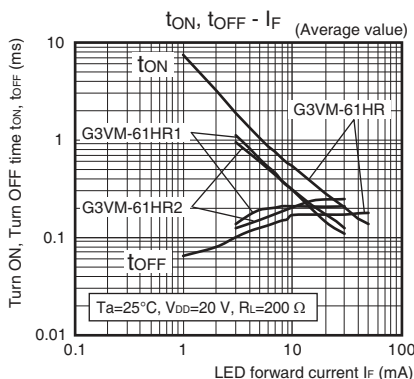


## Engineering Data

### ● Turn ON, Turn OFF time vs. Ambient temperature

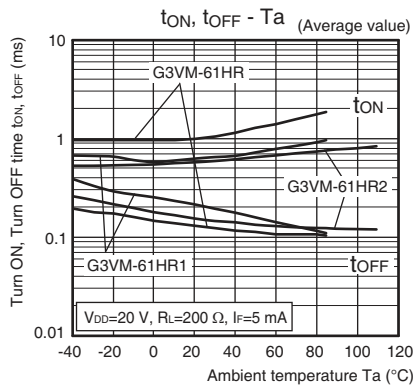


### ● Current leakage vs. Load voltage

G3VM-61HR/61HR2

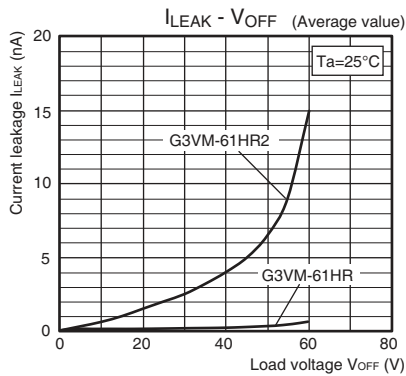


### ● Current leakage vs. Ambient temperature

G3VM-61HR1/61HR2

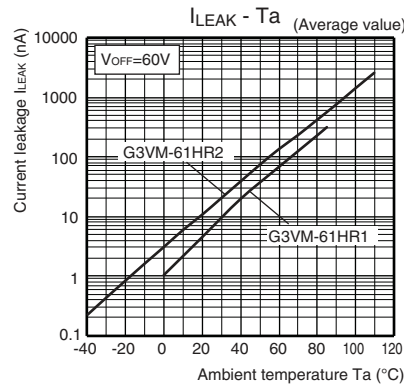

### ● Output terminal capacitance vs. Load voltage

G3VM-61HR/61HR2

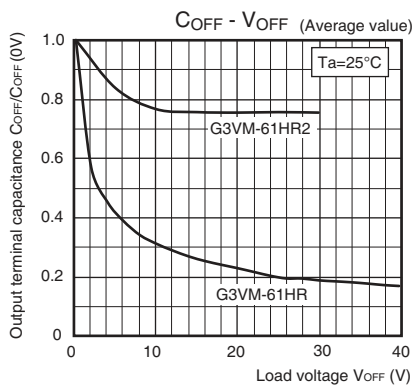


### Appearance / Terminal Arrangement / Internal Connections

#### Appearance


##### SOP (Small Outline Package)

SOP 6-pin

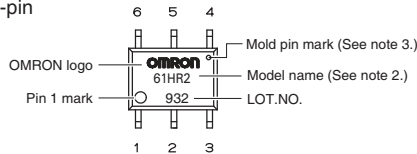


- Note: 1.** The actual product is marked differently from the image shown here.  
**Note: 2.** "G3VM" does not appear in the model number on the Relay.  
**Note: 3.** The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

#### Terminal Arrangement/Internal Connections (Top View)




#### Dimensions (Unit: mm)




##### Surface-mounting Terminals

Weight: 0.13 g

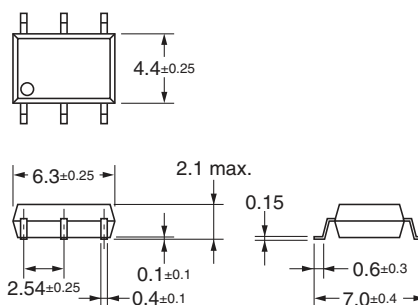

##### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



**Note:** The actual product is marked differently from the image shown here.

#### Approved Standards

UL recognized

Approved Standards	Contact form	File No.
UL (recognized)	1a (SPST-NO)	E80555

#### Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

### OMRON Corporation

Electronic and Mechanical Components Company

#### Regional Contact

##### Americas

<https://www.components.omron.com/>

##### Asia-Pacific

<https://ecb.omron.com.sg/>

##### Korea

<https://www.omron-ecb.co.kr/>

##### Europe

<http://components.omron.eu/>

##### China

<https://www.ecb.omron.com.cn/>

##### Japan

<https://www.omron.co.jp/ecb/>