EZ- LIGHT® Touch K30 Series Pick-to-Light



Datasheet

Compact, Single-Point Devices for Error-Proofing of Bin-Picking Operations




- Rugged, cost-effective and easy-to-install solutions for error-proofing and partsverification applications
- Compact devices are completely self contained—No controller needed
- Illuminated dome provides an easy-to-see green job light: some models also light red for alternate operation
- Waterproof IP69K construction for washdown environments
- Easy actuation-no force required
- 12 V dc to 30 V dc operation
- Can be actuated with bare hands or in gloves

Models

Model	Function	Output	Connection 1	Job Light
K30APTGXDQ		PNP, NO	Integral 4-pin M12/ Euro-style male quick disconnect	Green
K30RPTGXDQ	Job light is ON at all times while job input is active	PNP, NC		
K30ANTGXDQ	Touch activates output	NPN, NO		
K30RNTGXDQ		NPN, NC		
K30APTGRCQ		PNP, NO		Green (Red)
K30RPTGRCQ	 Job light is Green while job input is active Touch activates output and overrides job light 	PNP, NC		
K30ANTGRCQ	(turns Red) for visual verification that action was sensed	NPN, NO		
K30RNTGRCQ		NPN, NC		
K30APTGREQ	Job light is Green at all times while job input is	PNP, NO		Green (Red)
K30RPTGREQ	active Touch activates output	PNP, NC		
K30ANTGREQ	A touch while job input is inactive causes unit to light Red, providing visual verification that sensor	NPN, NO		
K30RNTGREQ	is functioning properly	NPN, NC		

Wiring Diagrams

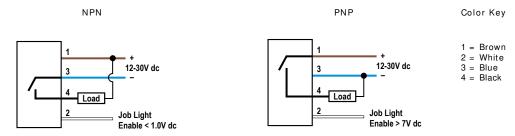



NOTE: Cabled wiring diagrams are shown. Quick disconnect (QD) wiring diagrams are functionally identical.



Original Document 170454 Rev. E

Integral quick disconnect models are listed.

To order the 2 m (6.5 ft) PVC cable model, omit the suffix "Q" in the model number. For example, K30APTGXD.

To order the 150 mm (6 in) PVC cable model with a 4-pin M12/Euro-style quick disconnect, replace the suffix "Q" with "QP" in the model number. For example, K30APTGXDQP.

Models with a quick disconnect require a mating cordset.

Specifications

Supply Voltage 12 V dc to 30 V dc

Supply Current

55 mA max current (exclusive of load)

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Rating

Maximum load: 150 mA

ON-state saturation voltage: < 2 V dc at 10 mA; < 2.5 V dc at 150

OFF-state leakage current: <10 μA at 30 V dc

Output Response Time:

150 milliseconds On and Off

Vibration and Mechanical Shock

All models meet Mil. Std. 202F requirements method 201A (vibration: 10 Hz to 60 Hz max., double amplitude 0.06 in. maximum acceleration 10G). Also meets IEC 947-5-2; 30G 11 ms duration, half sine wave.

Environmental Rating

IEC IP67, IP69K per DIN 40050-9.

Cabled models also meet IP69K if the cable and cable entrance are protected from high-pressure spray.

Enclosure Type 4X, 13

Storage

-40 °C to +70 °C (-40 °F to +158 °F)

Operating Conditions

Temperature: -40 °C to +50 °C (-40 °F to +122 °F) Humidity: 90% at 50 °C maximum relative humidity (noncondensing)

Certifications





Power-Up Delay

300 milliseconds

Construction

Housing: polycarbonate Translucent dome: polycarbonate

Mounting nut: PBT

Job ("pick") indicator: Green

Pick sensed indicator: Red or Off, depending on model

Indicators

M22 x 1.5 Threaded base, max torque 2.25 N·m (20 in-lbf)

Connections

Integral 4-pin M12/Euro style QD, or 2 m (6.5 ft) PVC integral cable

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.


Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (Amps)		
20	5.0		
22	3.0		
24	2.0		
26	1.0		
28	0.8		
30	0.5		

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.

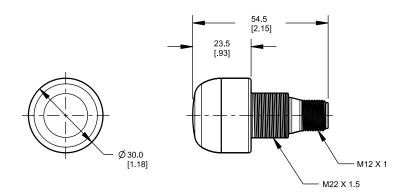

Accessories

Cordsets


4-Pin Threaded M12/ Euro-Style Cordsets						
Model	Length	Style	Dimensions	Pinout (Female)		
MQDC-406	1.83 m (6 ft)					
MQDC-415	4.57 m (15 ft)					
MQDC-430	9.14 m (30 ft)	Straight				
MQDC-450	15.2 m (50 ft)		M12 x 1 → ø 14.5 →	1-2-2		
MQDC-406RA	1.83 m (6 ft)		, 32 Тур.	4-3-3		
MQDC-415RA	4.57 m (15 ft)		[1.26"]	. •		
MQDC-430RA	9.14 m (30 ft)		30 Typ.	1 = Brown 2 = White		
MQDC-450RA	15.2 m (50 ft)	Right-Angle	M12 x 1 0 14.5 [0.57"]	3 = Blue 4 = Black		

Brackets

SMB22A


- Right-angle bracket with curved slot for versatile orientation
- 12-ga. stainless steel
- · Mounting hole for 22 mm sensor

Hole center spacing: A to B = 26.0 Hole size: A = \emptyset 4.6, B = 4.6 x 16.9, C = 22.2



SMB22FVK

- V-clamp, flat bracket and fasteners for mounting to pipe or extensions
- Clamp accommodates 28 mm diameter tubing or 1 in. square extrusions
- · 22 mm hole for mounting sensor




Hole size: A = Ø 22.5

SMB22RAVK


- V-clamp, right-angle bracket and fasteners for mounting to pipe or extensions
- Clamp accommodates 28 mm diameter tubing or 1 in. square extrusions
- 22 mm hole for mounting sensor

Hole size: $A = \emptyset 22.5$



SMBAMS22P


- Flat SMBAMS series bracket with 22 mm hole for mounting sensors
- Articulation slots for 90+ ° rotation
- 12-ga. (2.6 mm) cold-rolled steel



Hole center spacing: A = 26.0, A to B = 13.0 Hole size: A = 26.8 x 7.0, B = \emptyset 6.5, C = \emptyset 22.5


SMBAMS22RA

- Right-angle SMBAMS series bracket with 22 mm hole for mounting sensors
- Articulation slots for 90+ $^{\circ}$ rotation
- 12-ga. (2.6 mm) cold-rolled steel



TC-K30-CL

Touch cover



Diameter: A = 40.7 Height: B = 31

Hole center spacing: A = 26.0, A to B = 13.0Hole size: $A = 26.8 \times 7.0$, $B = \emptyset 6.5$, $C = \emptyset 22.5$

All measurements are listed in millimeters, unless noted otherwise.

Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.