


| | | |
|-----------------------|---|---|
| Frame | PBT, UL94V-0 | Notes |
| Impeller | PBT, UL94V-0 | Date: 101719 |
| Connection | Lead wires * | Available Options Alarm |
| Motor | Brushless DC, impedance protected | |
| Bearing System | Sealed Sleeve | |
| Insulation Resistance | 10M ohm between lead wire and frame (500VDC) | *Connection: UL1571 28AWG, black GND UL1571 28AWG, red Vcc UL1571 28AWG white tach |
| Dielectric Strength | 60 seconds at 500VAC, max. leakage < 500 MicroAmp | |
| Temperature Range | -10C ~ +70C | |
| Life Expectancy | 50000 hours (40C) | |



| | |
|--|-----------------|
| Model Number | OD3006-12LSS01a |
| Part Number | 131121221 |
| Nominal Voltage | 12 VDC |
| Voltage Range | 9 ~ 13.2 VDC |
| Current (Amps) | 0.06 A |
| Input Power (Watts) | 0.72 W |
| Rated Speed (RPM) | 7500 |
| Airflow (CFM) | 2.4 |
| Noise Level (dB) | 25 |
| Max. Static Pressure (" H ₂ O) | 0.08 |

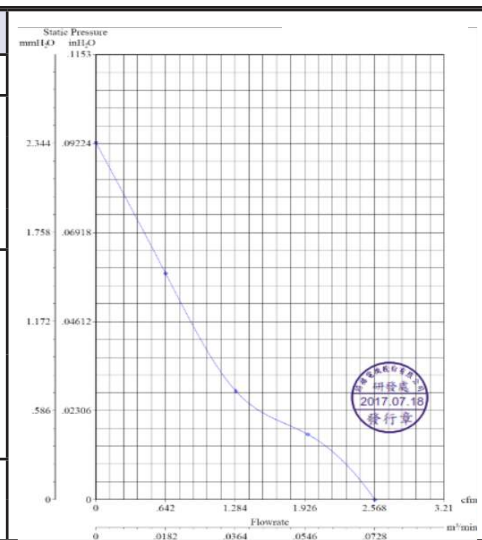