

## 12V, 15V and 24V 20A Buffer (Hold-Up) Modules

<https://product.tdk.com/en/power/zbm>  
[www.emea.lambda.tdk.com/zbm](http://www.emea.lambda.tdk.com/zbm)



The ZBM20 20A buffer modules are ideal for providing short term hold-up or peak power for loads powered by 12V, 15V or 24Vdc output AC-DC power supplies. During normal operation, energy is stored in the ZBM20's electrolytic capacitors. When the AC power is interrupted for a short period of time, the ZBM20 continues to power the load, allowing equipment to shutdown in a safe and controlled manner. The ZBM20 can be set to fixed or variable buffer mode. In fixed mode it will provide power when the input voltage drops to below a preset level, in variable mode (24V model only) when the input decreases by 1V. Multiple buffer modules can be paralleled for additional hold-up time. Product status can be accessed remotely via a DC OK relay. The output voltage can also be inhibited to avoid an unsafe discharge of the stored energy.

Features	Benefits
• Provides 380ms Additional Hold-Up Time at Max Buffer Power	• Avoids Loss of Data During AC Power Interruptions
• Utilizes Electrolytic Capacitors to Store Energy	• No Batteries to Service or Maintain
• Five Year Warranty	• Lower Cost of Ownership
• Parallel Capable	• Hold-Up Time Can Be Extended
• Output Remote On/Off Function	• Avoids Unsafe Discharge of Stored Energy

Model Selector				
Model	Output Voltage Fixed Mode (V) (1)	Output Voltage Dynamic Mode (V) (1)	Maximum Current (A)	Average Buffer Power (W)
ZBM20-12	11	-	20	220
ZBM20-15	13.8	-	20	276
ZBM20-24	22.4	Vin-1	20	448

Specifications				
Model		ZBM20-12	ZBM20-15	ZBM20-24
<b>Input</b>				
Input Voltage range	Vdc	11.5 - 14.4	14.4 - 18	Fixed Mode: 23 - 30 Vin-1 Mode: 24 - 30
Input Current (Typical)	A	Charging Mode: 0.8, Ready Mode: 0.2		
Charging Time (Typical)	s	40		
Hold Up Time (Typical)	ms	380		
Conducted & Radiated EMI	-	EN55032-B CISPR32-B		
Immunity	-	See immunity table		
Safety Certifications and Markings	-	IEC/UL/CSA/EN62368-1, CE Mark and UKCA Mark		
<b>Immunity</b>				
Test	Standard	Test Level	Criteria	Notes
ESD	EN61000-4-2	4	A	15kV air, 8kV contact
Radiated Susceptibility	EN61000-4-3	3	A	
Electrical Fast Transient Burst	EN61000-4-4	1-3	A	Signal pin to FG Lvl 1
Surge	EN61000-4-5	1-2	A	Common mode only Lvl 2 Signal pin to FG Lvl 1
Conducted Susceptibility	EN61000-4-6	3	A	-
<b>Output</b>				
Buffer Voltage Tolerance (Load > 5%)	%	Fixed Mode: ±2, Dynamic Mode: +3 to -4 (24V model only)		
Switching Frequency (Typical)	kHz	Buck Converter: 100, Boost Converter: 65		
Ripple & Noise	mV	<160		<240
Minimum Load	-	No minimum load required		
Overcurrent Protection	%	>105 of buffer current		
Input Overvoltage Protection	-	Yes		
Overtemperature Protection	-	No		
Remote On/Off	-	Yes		
DC OK Relay	-	Photo MOS relay closed when DC is okay. (30V 0.2A)		
Status Signals	-	Photocoupled signals indicating fully charged and discharging modes		
Indicators	-	Green LED is off when bulk capacitor voltage is below ES1 level		
Parallel Operation	-	Possible, see installation manual		
Series Operation	-	Not possible		
<b>Environmental</b>				
Operating Temperature	°C	-25 to +70		
Storage Temperature	°C	-25 to +85		
Humidity (non condensing)	%RH	Operating: 30 - 90, storage: 10 - 90		
Cooling	-	Convection		
Altitude	m	5,000		
Withstand Voltage (For 1 minute)	Vac	Input and output to ground 500		
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500VDC (input and output to ground)		
Vibration (Non Operating)	-	10 - 55Hz (sweep for 1 min) 19.6m/s <sup>2</sup> (constant X, Y, Z axis for 1 hour each)		
Shock	m/s <sup>2</sup>	< 196.1		
<b>Other</b>				
Weight (Typ)	g	550		
Size (LxWxH)	mm	175 x 85 x 57		
Size (LxWxH)	Inches	6.89 x 3.35 x 2.24		
Connectors		CN1 & 2: JST B6P-VH, CN3: JST B6B-XH-A		
MTBF - Telcordia TR-332 issue 5 (25°C)	Hours	1,960,742		
Warranty	yrs	5		


Notes

See website for detailed specifications, test methods and installation manual

(1) ZBM20-24 Fixed and VIN-1 mode is switch selectable using SW1


## Buffer Time Versus Buffer Current

ZBM20-12 :  
Buffer time : 0 – 2 seconds

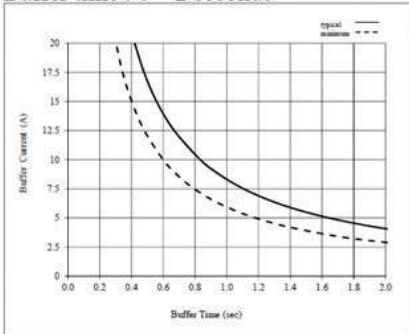


NOTE : Ta=25°C and initial capacitance.

ZBM20-15 :  
Buffer time : 0 – 2 seconds

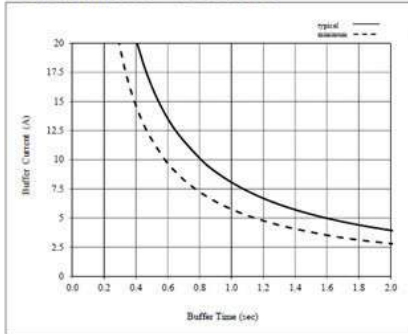


NOTE : Ta=25°C and initial capacitance.

ZBM20-24 :  
Buffer time : 0 – 2 seconds

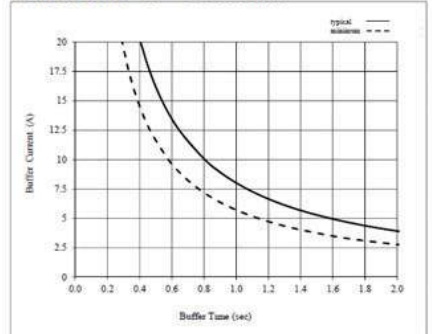


NOTE : Ta=25°C and initial capacitance.

## Block Diagram

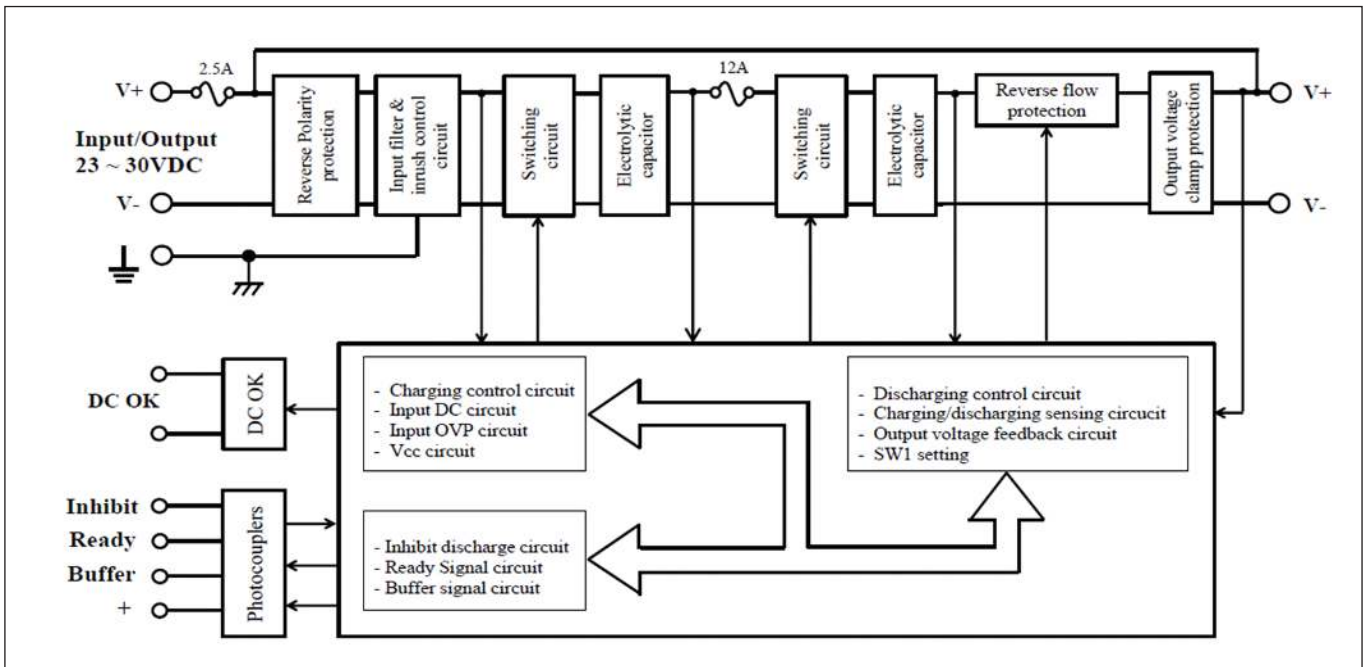

**Timing Diagram**

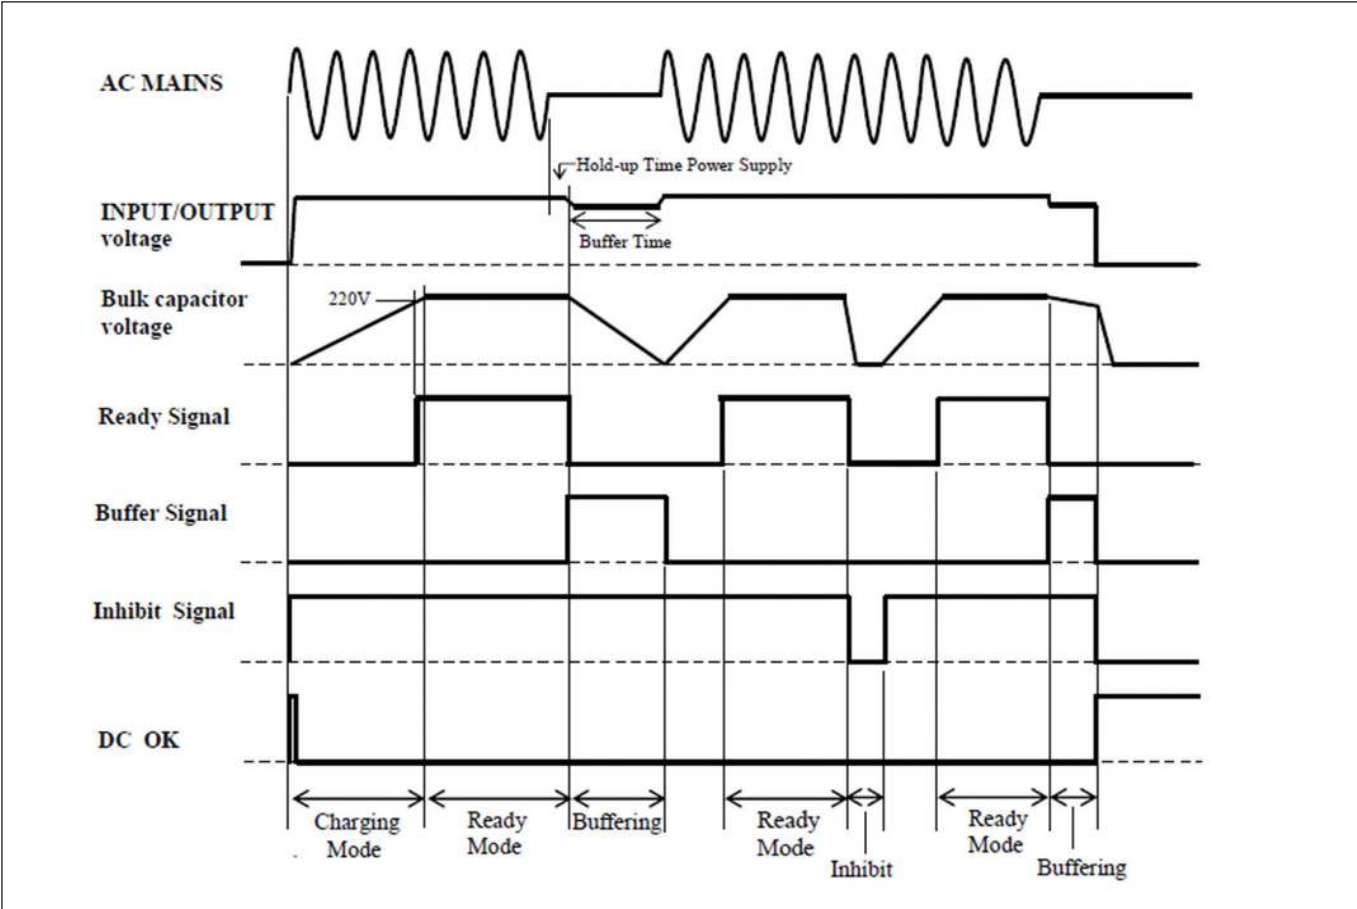

**Mechanical Specification**

Outline Drawing ZBM20

The mechanical drawing provides detailed dimensions for the ZBM20 power supply. Key dimensions include:
 

- Overall length: 175.0 ± 1 mm (172.1 mm)
- Overall width: 2-167.0 ± 0.5 mm
- Height: 85.0 ± 1 mm
- Mounting hole diameter: 5-φ3.2
- Terminal pin spacing: 2-4.0 mm
- Terminal pin length: 54.6 ± 0.5 mm

**CONNECTORS USED :**

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
PIN HEADER (CN1 & CN2)	B5P-VH(LY)(SN)	J.S.T.	2
PIN HEADER (CN3)	B5B-XH-M(LF)(SN)	J.S.T.	1

**MATCHING HOUSINGS, PINS & TOOL (NOT INCLUDED WITH THE PRODUCT):**

PART DESCRIPTION	PART NAME	MANUFACT.	QTY
SOCKET HOUSING (CN1 & CN2)	VHR-BN	J.S.T.	2
SOCKET HOUSING (CN3)	XHP-6	J.S.T.	1
TERMINAL PINS	SVH-41T-P1.1	J.S.T.	12
TERMINAL PINS	SKH-C02T-PO.6	J.S.T.	6

**NOTES:**

- MODEL NAME, INPUT VOLTAGE RANGE, NOMINAL OUTPUT VOLTAGE, MAXIMUM OUTPUT CURRENT, BUFFER TIME, COUNTRY OF MANUFACTURE AND SAFETY MARKING (FOR ONLY APPROVED PRODUCTS) ARE SHOWN HERE IN ACCORDANCE WITH THE SPECIFICATIONS.
- 5-φ3.2 HOLES ARE FOR CUSTOMER'S CHASSIS MOUNTING HOLE.
- SWITCH IS SELECTED TO FIXED MODE BEFORE SHIPMENT. (SWITCH IS FOR 24V ONLY).



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
info@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tts.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

