


# Automotive Surface Mount Type Switching Regulator SPF8033J

## ■ Features

- Output voltage: 3.3V±2%  
(VIN=14V, Io=0.5A, Tj=25°C)
- Possible to apply output current 1.5A (Ta=25°C) with compact HSOP16 package
- High efficiency 82% (Vin=14V, Io=0.5A)
- External components: 4 parts
- Built-in reference oscillator (125kHz)
- ON/OFF function of low current consumption at OFF

## ■ Package

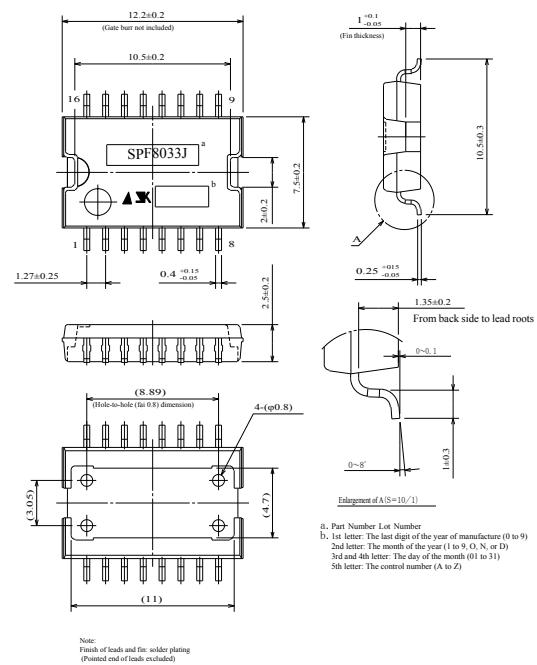

## ■ Absolute Maximum Ratings

Characteristic	Symbol	Ratings	Units	Remarks
Input voltage	V <sub>IN</sub>	35	V	
		40	V	Within 300ms
Power dissipation *2	P <sub>D</sub>	1.6	W	Heat sink land pattern :1cm <sup>2</sup>
Junction temperature	T <sub>j</sub>	125	°C	
Storage temperature	T <sub>stg</sub>	-40~125	°C	

## ■ Recommended Operating Conditions

Characteristic	Symbol	Ratings	Units	Remarks
Input voltage range	V <sub>IN</sub>	5.3~35	V	I <sub>o</sub> =0~1A
		6.3~35	V	I <sub>o</sub> =0~1.5A
Output current range	I <sub>o</sub>	0~1.5	A	V <sub>IN</sub> ≥8V
Operating junction Temperature range	T <sub>jop</sub>	-30~125	°C	
Operating temperature range	T <sub>op</sub>	-30~125	°C	

## ■ Electrical Characteristics (Tj=25°C)

Characteristic	Symbol	Limits			Units	Test Conditions
		Min.	Typ.	Max.		
Output voltage	V <sub>o</sub>	3.234	3.30	3.366	V	V <sub>IN</sub> =14V, I <sub>o</sub> =0.5A
Temperature coefficient *5	TC	+0.5			mV/°C	V <sub>IN</sub> =14V, I <sub>o</sub> =0.5A
Efficiency *6	η	77			%	V <sub>IN</sub> =14V, I <sub>o</sub> =0.5A
Operating frequency	f <sub>o</sub>	70	125	180	kHz	V <sub>IN</sub> =14V, I <sub>o</sub> =0.5A
Line regulation	V <sub>L</sub> line		25	80	mV	V <sub>IN</sub> =8~30V, I <sub>o</sub> =0.5A
Load regulation	V <sub>L</sub> load		10	30	mV	V <sub>IN</sub> =14V, I <sub>o</sub> =0.2~0.8A
Quiescent current	I <sub>q</sub>		7	12	mA	V <sub>IN</sub> =14V, I <sub>o</sub> =0A
Standby current	I <sub>q</sub> (off)			200	μA	V <sub>IN</sub> =14V V <sub>ON/OFF</sub> =0.3V
Current Limit	I <sub>s</sub>	1.6			A	V <sub>IN</sub> =14V
ON/OFF terminal	V <sub>SSL</sub>			0.5	V	
	I <sub>SSL</sub>			100	μA	V <sub>SSL</sub> =0V

## ■ Circuit Block Diagram

