


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00133	Connector, dc plug, 5.5x2.1xL18.5 mm, molding style, spring contacts	1	
2	30-00415	Wire, 2C TS, 18 AWG, UL2468, 300V, 80°C, 4.4 mm, VW-1, PVC, red and black	1	
3	24-00006	Overmold	1	PVC, black

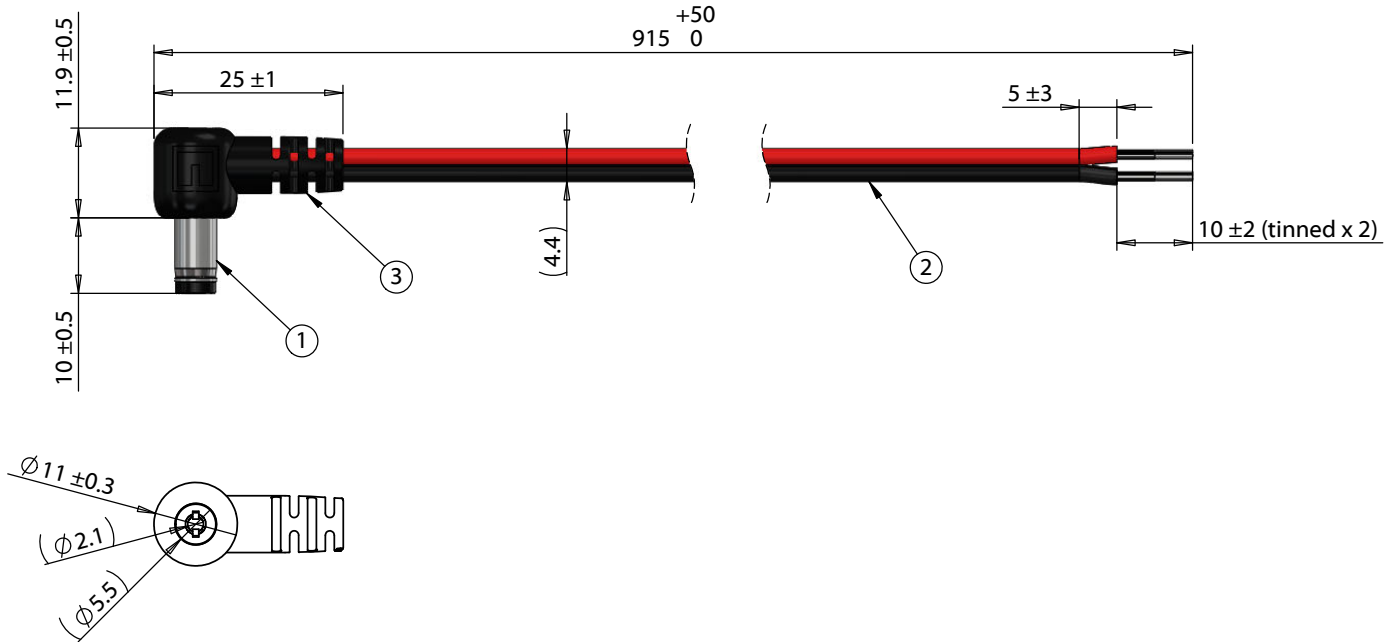

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

Cable rated for 48 V, 8.5 A

Wiring diagram	
50-00133	Wire color
Center	Red
Sleeve	Black

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	11/1/2022	Initial release	MP <small>Digitally signed by MP Date: 2022.11.01 09:32:51 -0700</small>		
			Verified:	Function test: no open, no short circuit, no intermittent	Size: A Part number: 10-05227 Scale: 1:1
			JD <small>Digitally signed by JD Date: 2022.11.09 15:56:54 -0800</small>	Description:	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 915 mm, 5.5x2.1x10 mm 90° 50-00133 dc plug to 10 mm tinned, 18 AWG, 30-00415 R-B wire	Sheet 1 of 1

5



4

3

2

1