


**FEATURES:**

- A, C, and D grades
- Low input and output leakage  $\leq 1\mu\text{A}$  (max.)
- CMOS power levels
- True TTL input and output compatibility:
  - $V_{OH} = 3.3V$  (typ.)
  - $V_{OL} = 0.3V$  (typ.)
- High Drive outputs (-15mA IOH, 48mA IOL)
- Meets or exceeds JEDEC standard 18 specifications
- Power off disable outputs permit "live insertion"
- Available in SOIC and QSOP packages


**DESCRIPTION:**

The IDT74FCT377T is an octal D flip-flop built using an advanced dual metal CMOS technology. The IDT74FCT377T has eight edge-triggered, D-type flip-flops with individual D inputs and O outputs. The common buffered Clock (CP) input loads all flip-flops simultaneously when the Clock Enable ( $\overline{CE}$ ) is low. The register is fully edge-triggered. The state of each D input, one set-up time before the low-to-high clock transition, is transferred to the corresponding flip-flop's O output. The  $\overline{CE}$  input must be stable only one set-up time prior to the low-to-high transition for predictable operation.

**FUNCTIONAL BLOCK DIAGRAM**

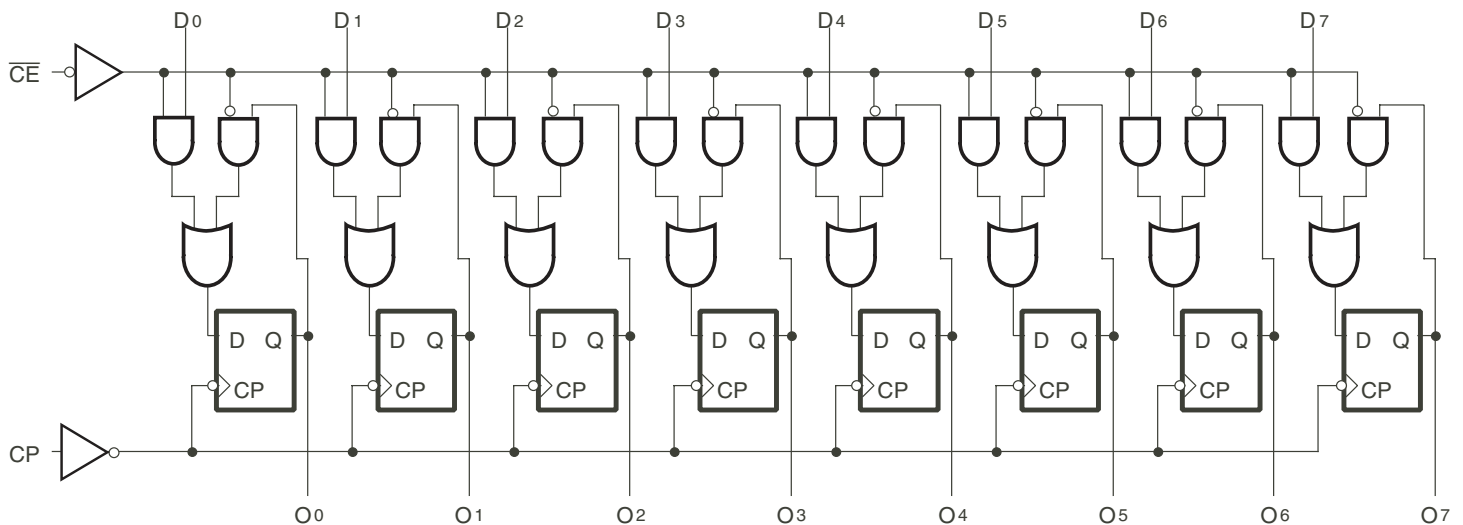

## PIN CONFIGURATION

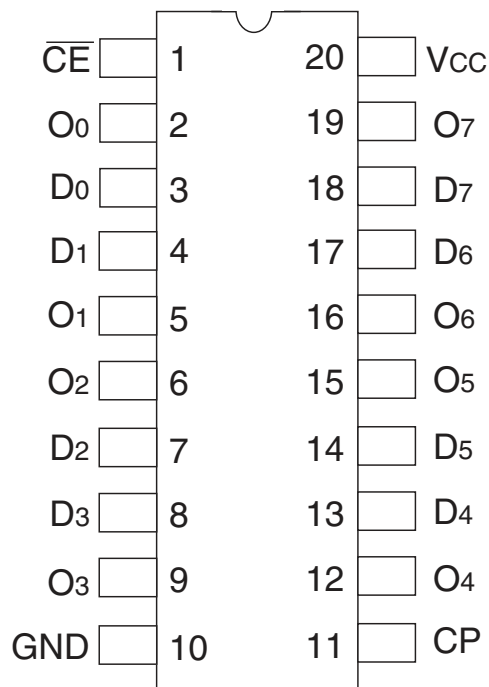

SOIC/ QSOP  
TOP VIEW

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                           | Description                          | Max                          | Unit |
|----------------------------------|--------------------------------------|------------------------------|------|
| V <sub>TERM</sub> <sup>(2)</sup> | Terminal Voltage with Respect to GND | -0.5 to +7                   | V    |
| V <sub>TERM</sub> <sup>(3)</sup> | Terminal Voltage with Respect to GND | -0.5 to V <sub>CC</sub> +0.5 | V    |
| T <sub>STG</sub>                 | Storage Temperature                  | -65 to +150                  | °C   |
| I <sub>OUT</sub>                 | DC Output Current                    | -60 to +120                  | mA   |

### NOTES:

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability. No terminal voltage may exceed V<sub>CC</sub> by +0.5V unless otherwise noted.
- Inputs and V<sub>CC</sub> terminals only.
- Output and I/O terminals only.

## CAPACITANCE (T<sub>A</sub> = +25°C, F = 1.0MHz)

| Symbol           | Parameter <sup>(1)</sup> | Conditions            | Typ. | Max. | Unit |
|------------------|--------------------------|-----------------------|------|------|------|
| C <sub>IN</sub>  | Input Capacitance        | V <sub>IN</sub> = 0V  | 6    | 10   | pF   |
| C <sub>OUT</sub> | Output Capacitance       | V <sub>OUT</sub> = 0V | 8    | 12   | pF   |

### NOTE:

- This parameter is measured at characterization but not tested.

## PIN DESCRIPTION

| Pin Names                       | Description               |
|---------------------------------|---------------------------|
| D <sub>0</sub> – D <sub>7</sub> | Data Inputs               |
| $\overline{CE}$                 | Clock Enable (Active LOW) |
| O <sub>0</sub> – O <sub>7</sub> | Data Outputs              |
| CP                              | Clock Pulse Input         |

## FUNCTION TABLE<sup>(1)</sup>

| Operating Mode | Inputs |                 |   | Outputs   |
|----------------|--------|-----------------|---|-----------|
|                | CP     | $\overline{CE}$ | D | O         |
| Load "1"       | ↑      | l               | h | H         |
| Load "0"       | ↑      | l               | l | L         |
| Hold           | ↑      | h               | X | No Change |
|                | H      | H               | X | No Change |

### NOTE:

- H = HIGH Voltage Level  
h = HIGH Voltage Level one setup time prior to the LOW-to-HIGH Clock Transition  
L = LOW Voltage Level  
l = LOW Voltage Level one setup time prior to the LOW-to-HIGH Clock Transition  
X = Don't Care  
↑ = LOW-to-HIGH Clock Transition

## DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:

Industrial :  $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ,  $V_{CC} = 5.0\text{V} \pm 5\%$

| Symbol    | Parameter                                     | Test Conditions <sup>(1)</sup>                          |                         | Min. | Typ. <sup>(2)</sup> | Max.    | Unit          |
|-----------|---|---|-------------------------|------|---------------------|---------|---------------|
| $V_{IH}$  | Input HIGH Level                              | Guaranteed Logic HIGH Level                             |                         | 2    | —                   | —       | V             |
| $V_{IL}$  | Input LOW Level                               | Guaranteed Logic LOW Level                              |                         | —    | —                   | 0.8     | V             |
| $I_{IH}$  | Input HIGH Current <sup>(4)</sup>             | $V_{CC} = \text{Max.}$                                  | $V_I = 2.7\text{V}$     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current <sup>(4)</sup>              | $V_{CC} = \text{Max.}$                                  | $V_I = 0.5\text{V}$     | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $I_I$     | Input HIGH Current <sup>(4)</sup>             | $V_{CC} = \text{Max.}, V_I = V_{CC} (\text{Max.})$      |                         | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $V_{IK}$  | Clamp Diode Voltage                           | $V_{CC} = \text{Min.}, I_N = -18\text{mA}$              |                         | —    | -0.7                | -1.2    | V             |
| $I_{OS}$  | Short Circuit Current                         | $V_{CC} = \text{Max.}^{(3)}, V_O = \text{GND}$          |                         | -60  | -120                | -225    | mA            |
| $V_{OH}$  | Output HIGH Voltage                           | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$ | $I_{OH} = -8\text{mA}$  | 2.4  | 3.3                 | —       | V             |
|           |   |   | $I_{OH} = -12\text{mA}$ | 2    | 3                   | —       |               |
| $V_{OL}$  | Output LOW Voltage                            | $V_{CC} = \text{Min.}$<br>$V_{IN} = V_{IH}$ or $V_{IL}$ | $I_{OL} = 48\text{mA}$  | —    | 0.3                 | 0.5     | V             |
| $I_{OFF}$ | Input/Output Power Off Leakage <sup>(5)</sup> | $V_{CC} = 0\text{V}, V_{IN}$ or $V_O = 4.5\text{V}$     |                         | —    | —                   | $\pm 1$ | $\mu\text{A}$ |
| $V_H$     | Input Hysteresis                              | —   |                         | —    | 200                 | —       | mV            |
| $I_{CC}$  | Quiescent Power                               | $V_{CC} = \text{Max.}$                                  |                         | —    | 0.01                | 1       | mA            |
|           | Supply Current                                | $V_{IN} = \text{GND}$ or $V_{CC}$                       |                         |      |                     |         |               |

### NOTES:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at  $V_{CC} = 5.0\text{V}$ ,  $+25^{\circ}\text{C}$  ambient.
3. Not more than one output should be shorted at one time. Duration of the short circuit test should not exceed one second.
4. The test limit for this parameter is  $\pm 5\mu\text{A}$  at  $T_A = -55^{\circ}\text{C}$ .
5. This parameter is guaranteed but not tested.

## POWER SUPPLY CHARACTERISTICS

| Symbol          | Parameter                                      | Test Conditions <sup>(1)</sup>  |  | Min. | Typ. <sup>(2)</sup> | Max.                | Unit       |
|-----------------|--|---|--|------|---------------------|---------------------|------------|
| $\Delta I_{CC}$ | Quiescent Power Supply Current TTL Inputs HIGH | $V_{CC} = \text{Max.}$<br>$V_{IN} = 3.4V^{(3)}$   |  | —    | 0.5                 | 2                   | mA         |
| $I_{CCD}$       | Dynamic Power Supply Current <sup>(4)</sup>    | $V_{CC} = \text{Max.}$ , Outputs Open<br>$\overline{CE} = \text{GND}$<br>One Input Toggling<br>50% Duty Cycle   | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 0.15                | 0.25                | mA/<br>MHz |
| $I_C$           | Total Power Supply Current <sup>(6)</sup>      | $V_{CC} = \text{Max.}$ , Outputs Open<br>$f_{CP} = 10\text{MHz}$<br>$\overline{CE} = \text{GND}$<br>One Bit Toggling<br>$f_i = 5\text{MHz}$<br>50% Duty Cycle                       | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 1.5                 | 3.5                 | mA         |
|                 |  |   | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | —    | 2                   | 5.5                 |            |
|                 |  | $V_{CC} = \text{Max.}$ , Outputs Open<br>$f_{CP} = 10\text{MHz}$ , 50% Duty Cycle<br>$\overline{CE} = \text{GND}$<br>Eight Bits Toggling<br>$f_i = 2.5\text{MHz}$<br>50% Duty Cycle | $V_{IN} = V_{CC}$<br>$V_{IN} = \text{GND}$ | —    | 3.8                 | 7.3 <sup>(5)</sup>  |            |
|                 |  |   | $V_{IN} = 3.4V$<br>$V_{IN} = \text{GND}$   | —    | 6                   | 16.3 <sup>(5)</sup> |            |

### NOTES:

- For conditions shown as Min. or Max., use appropriate value specified under Electrical Characteristics for the applicable device type.
  - Typical values are at  $V_{CC} = 5.0V$ ,  $+25^\circ\text{C}$  ambient.
  - Per TTL driven input; ( $V_{IN} = 3.4V$ ). All other inputs at  $V_{CC}$  or  $\text{GND}$ .
  - This parameter is not directly testable, but is derived for use in Total Power Supply Calculations.
  - Values for these conditions are examples of  $\Delta I_{CC}$  formula. These limits are guaranteed but not tested.
  - $I_C = I_{QUIESCENT} + I_{INPUTS} + I_{DYNAMIC}$   
 $I_C = I_{CC} + \Delta I_{CC} D_H N_T + I_{CCD} (f_{CP}/2 + f_i N_i)$   
 $I_{CC} = \text{Quiescent Current}$   
 $\Delta I_{CC} = \text{Power Supply Current for a TTL High Input } (V_{IN} = 3.4V)$   
 $D_H = \text{Duty Cycle for TTL Inputs High}$   
 $N_T = \text{Number of TTL Inputs at } D_H$   
 $I_{CCD} = \text{Dynamic Current caused by an Input Transition Pair (HLH or LHL)}$   
 $f_{CP} = \text{Clock Frequency for Register Devices (Zero for Non-Register Devices)}$   
 $f_i = \text{Output Frequency}$   
 $N_i = \text{Number of Outputs at } f_i$
- All currents are in milliamps and all frequencies are in megahertz.


## SWITCHING CHARACTERISTICS OVER OPERATING RANGE

| Symbol    | Parameter  | Condition <sup>(1)</sup>                 | 74FCT377AT          |      | 74FCT377CT          |      | 74FCT377DT          |      | Unit |
|-----------|--|--|---------------------|------|---------------------|------|---------------------|------|------|
|           |  |  | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. | Min. <sup>(2)</sup> | Max. |      |
| $t_{PLH}$ | Propagation Delay                                | $C_L = 50\text{pF}$<br>$R_L = 500\Omega$ | 2                   | 7.2  | 2                   | 5.2  | 2                   | 4.4  | ns   |
| $t_{PHL}$ | CP to Qx   |  | 2                   | —    | 2                   | —    | 2                   | —    | ns   |
| $t_{SU}$  | Set-up Time HIGH or LOW<br>Dx to CP              |  | 1.5                 | —    | 1.5                 | —    | 1                   | —    | ns   |
| $t_H$     | Hold Time HIGH or LOW<br>Dx to CP                |  | 3.5                 | —    | 3.5                 | —    | 3                   | —    | ns   |
| $t_{SU}$  | Set-up Time HIGH or LOW<br>$\overline{CE}$ to CP |  | 1.5                 | —    | 1.5                 | —    | 0                   | —    | ns   |
| $t_H$     | Hold Time HIGH or LOW<br>$\overline{CE}$ to CP   |  | 8                   | —    | 6                   | —    | 3                   | —    | ns   |
| $t_W$     | CP Pulse Width HIGH or LOW                       |  |                     |      |                     |      |                     |      |      |

### NOTES:


- See test circuit and waveforms.
- Minimum limits are guaranteed but not tested on Propagation Delays.

## TEST CIRCUITS AND WAVEFORMS

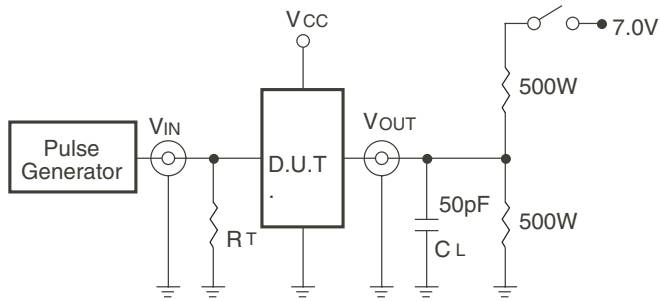


Octal Link

**Test Circuits for All Outputs**

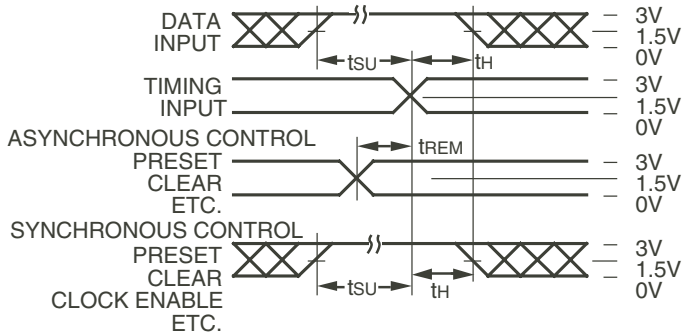

Octal Link

**Set-Up, Hold, and Release Times**

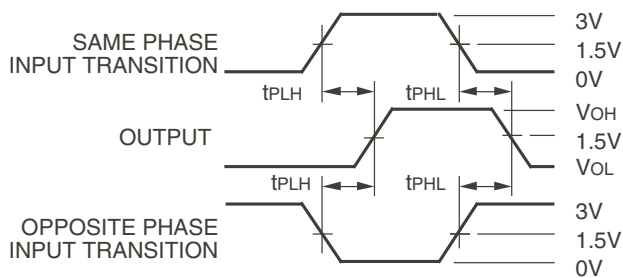

Octal Link


**Propagation Delay**

## SWITCH POSITION

| Test                                    | Switch |
|---|--------|
| Open Drain<br>Disable Low<br>Enable Low | Closed |
| All Other Tests                         | Open   |


### DEFINITIONS:

CL = Load capacitance: includes jig and probe capacitance.  
RT = Termination resistance: should be equal to ZOUT of the Pulse Generator.

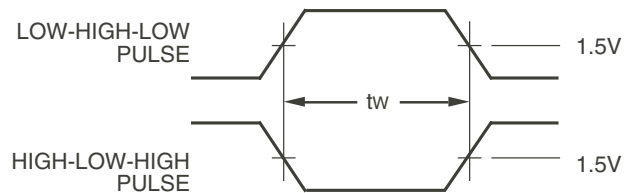

**Pulse Width**

Octal Link

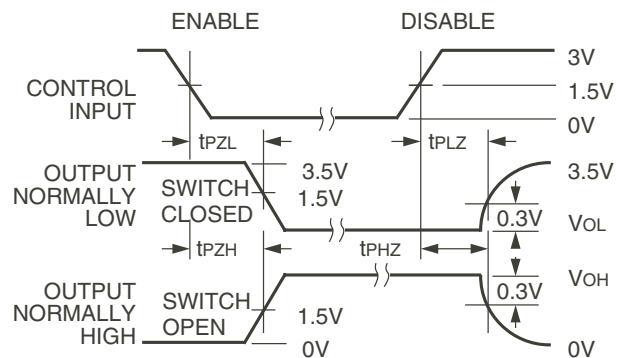


Octal Link

**Enable and Disable Times**

### NOTES:

- Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.
- Pulse Generator for All Pulses: Rate  $\leq 1.0\text{MHz}$ ;  $t_r \leq 2.5\text{ns}$ ;  $t_f \leq 2.5\text{ns}$ .

## ORDERING INFORMATION

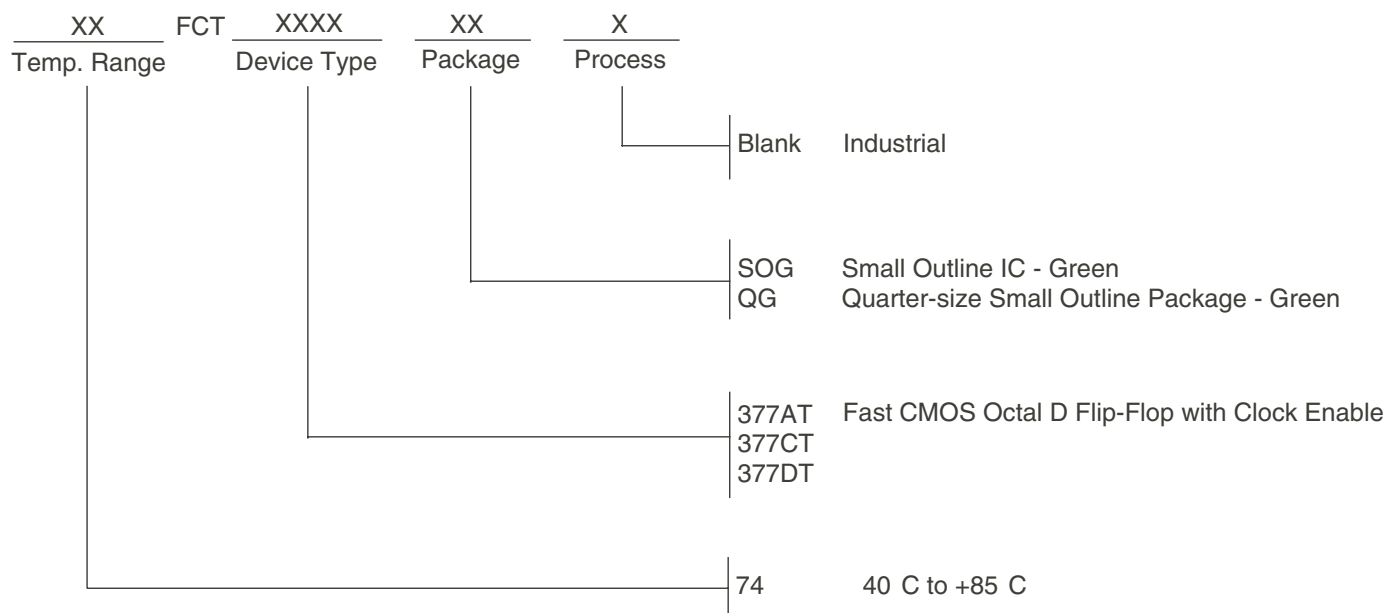

## Datasheet Document History

10/03/09 Pg. 6 Updated the ordering information by removing the "IDT" notation and non RoHS part.

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.