

# KL5BVCX400WMP

## Video over Coax IC

### Datasheet

Rev. 0.0.1

MegaChips Corporation' Proprietary

This information shall not be shared or distributed outside the company and will be exchanged based on the signed proprietary information exchange agreement. MegaChips Corporation reserves the right to make any change herein at any time without prior notice. MegaChips Corporation does not assume any responsibility or liability arising out of application or use of any product or service described herein except as explicitly agreed upon.

---

## Revision History

Revision	Date	Description
0.0.1	2015/03/31	First draft

---

## Table of Contents

1 Product overview .....	4
1.1 Function Overview.....	4
1.2 Block Diagram .....	5
2 Pins.....	6
2.1 Pin Assignments .....	6
2.2 Pin Descriptions.....	7
2.2.1 Analog Front-end Connection Pins .....	7
2.2.2 Ethernet Connection Pins .....	7
2.2.3 SDRAM Connection Pins.....	9
2.2.4 Serial Flash Connection Pins.....	10
2.2.5 Serial Communication Connection Pins.....	10
2.2.6 General-purpose Ports.....	10
2.2.7 CPU Peripheral Connection Pin.....	11
2.2.8 AC Synchronous Detection Pin.....	11
2.2.9 Clock and Reset Pins.....	11
2.2.10 DAC Pins .....	11
2.2.11 ADC Pins.....	12
2.2.12 Test Setting Pin.....	12
2.2.13 Debugger Connection Pins .....	12
2.2.14 Hardware Revision Setting Pins.....	13
2.2.15 Power Supply and VSS Pins.....	13
2.2.16 Shared Pins .....	14
3 Operating Conditions .....	15
3.1 Absolute Maximum Ratings .....	15
3.2 Recommended Operating Conditions .....	15
4 BaseBand Part.....	16
4.1 Block Diagram .....	16
4.2 List of Functions.....	17
4.2.1 Microcontroller and Peripherals .....	17
4.2.2 VOC-PHY Function.....	17
4.2.3 VOC-MAC Processing Function.....	17
4.2.4 SPI FLASH Interface Function.....	17
4.2.5 SDRAM Interface Functions.....	17
4.2.6 Ethernet PHY Interface Functions.....	17
4.2.7 Clock and Reset Control Functions.....	17
4.3 Example System Architectures.....	18
4.3.1 Normal Mode .....	18
4.3.2 ICE Mode .....	19
4.4 Electrical Characteristics .....	20
5 Analog Front-End(AFE) Part .....	21
5.1 General Description.....	21

---

5.2.1 Power Supply Specifications.....	22
5.2.2 Digital Interface Specifications.....	23
6 Package.....	24
7 Ordering Information.....	25

## 1 Product overview

### 1.1 Function Overview

The KL5BVCX400WMP is a VOC (Video over Coax) device designed to simplify the connections of IP cameras to NVR (Network Video Recorders) and monitors. The chip can be used to extend the range between the camera and NVR to over 2km using standard coax cable. This enables fast and easy upgrades for analog camera systems as well as new deployments of IP cameras that need longer distance than can be achieved with Ethernet cables.

The KL5BVCX400WMP supports up to 20 IP cameras on a single coax cable and a wide variety of topologies, as well as PoE (Power over Ethernet) and PoC (Power over Coax).

The KL5BVCX400WMP incorporates a 32-bit RISC processor and provides a single-chip implementation of high-performance wavelet conversion OFDM functionality, MAC processing functionality with high-quality QoS support, and VOC/Ethernet bridge functionality.

QoS functionality can be used to guarantee a fixed communication speed for a variety of communications ranging from data transmission and reception to video streaming and IP telephony.

The KL5BVCX400WMP also has highly integrated analog front-end chip so that no other analog front-end IC for VOC is necessary. An on-chip PLL multiplier and synthesizer provide all the required clock signals from a single crystal or clock source.

Following are the features of KL5BVCX400WMP.

- Single chip solution for VOC application.
- PoC support to send power over coax (40W @ 500M)
- Long Range
  - 45Mbps @2km RG6 cable
  - 30Mbps @2km RG59.
- 128-bit AES for secure communications
- Secure pairing capability
- Auto connect capability
- Easy network management and diagnostics
- Low Power 0.4W operating
- QoS support
- Industrial Temperature operation
- TQFP144 (18mm X18mm) package

## 1.2 Block Diagram

Figure- 1 shows a block diagram of the KL5BVCX400WMP.

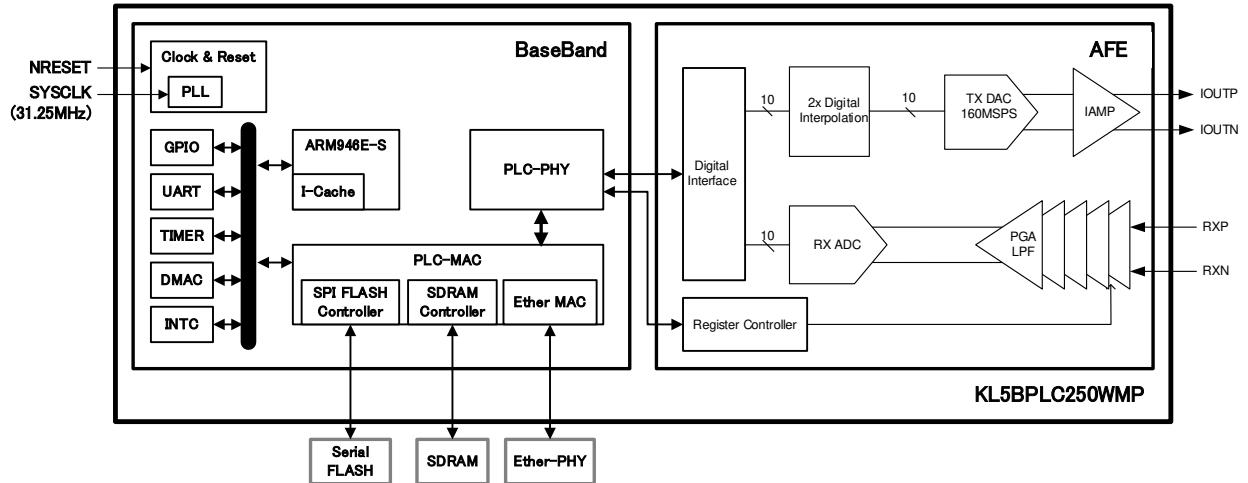


Figure- 1 KL5BVCX400WMP Block Diagram

## 2 Pins

### 2.1 Pin Assignments

GPIO6	1	GPIO5	144	AVSS
GPIO7	2	GPIO4	143	AVSS
GPIO8	3	GPIO3	142	AVSS
KME_TEST	4	IOVDDW	141	PLLDVSS
IOVDDW	5	SDDQ13	41	PLLAVSS
GPIO9	6	SDDQ12	42	PLLDVDD
GPIO10	7	SDDQ11	43	PLLAVDD
EXTINT/GPIO12	8	IOVDDW	44	IOVDDW
MOSI	9	IOVSS	45	CVDD
SCK	10	AFE_CLKO	46	99
MISO	11	SDDQ10	47	AVSS
CS	12	SDDQ9	48	98
SDDQ0	13	SDDQ8	49	A33VDD
SDDQ1	14	SDDQM1	50	97
SDDQ2	15	SDA12	51	IREF
SDDQ3	16	SDCLK	52	96
SDDQ4	17	IOVDDW	53	SERIAL_TXD
SDDQ5	18	SDA11	54	95
SDDQ6	19	SDA9	55	A12VDD
CVDD	20	SDA8	56	94
IOVDDW	21	IOVDDW	57	SERIAL_RXD
SDDQ7	22	SDA7	58	93
SDDQM0	23	SDA6	59	A33VDD
SDWE	24	SDA5	60	92
SDCAS	25	SDA4	61	IOVDDW
SDRAS	26	IOVDDW	62	CVDD
IOVDDW	27	RXD0	63	AVSS
BA0	28	RXD1	64	91
BA1	29	RXD2	65	90
CVDD	30	RXD3	66	89
IOVDDW	31	ZEROX	67	RXP
SDA10	32	IOVDDW	68	88
SDA0	33	NRESET	69	RXN
SDA1	34	RXDV	70	87
SDA3	35	RXC	71	AVSS
SDA2	36	RXER	72	86
				85
				84
				83
				82
				81
				80
				79
				78
				77
				76
				75
				74
				73

Figure- 2 Pin Assignment

## 2.2 Pin Descriptions

This section describes the KL5BVCX400WMP's pins. In the pin list, initial values for pins are given as "RST initial value", and "---" means that initial values are undefined since those pins act as input in the initial state (following reset cancellation).

Pins whose names are followed by "(shared)" are treated as shared pins. Shared pins are not shown in Figure- 2.

### 2.2.1 Analog Front-end Connection Pins

Table- 1 shows a list of analog front-end connection pins.

**Table- 1 List of Analog Front-end Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
46	AFE_CLKO	O	Low	---	A/D / D/A sampling clock output.(62.5MHz)
125	AFE_RXEN	O	Low	Pull-down	Active high receive enable output.

### 2.2.2 Ethernet Connection Pins

The KL5BVCX400WMP's Ethernet connection pins comply with MII and RMII specifications and also support Turbo-MII specification. Register settings can be used to select the desired specification set.

Table- 2 shows a list of Ethernet connection pins.

**Table- 2 List of Ethernet Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
77	TXD0	O	Low	---	When MII/Turbo-MII is selected, act as 4-bit transmission data output. When RMII is selected, TXD0 and TXD1 act as 2-bit transmission data output pins. Do not connect anything to TXD2 or TXD3 in this configuration.
78	TXD1		Low	---	
79	TXD2		Low	---	
80	TXD3		Low	---	
81	TXEN	O	Low	---	Active high transmission data enable output.
73	TXC	I	---	---	Transmission clock input. Not used when RMII is selected. Requires pull-down.
63	RXD0	I	---	---	When MII/Turbo-MII is selected, act as 4-bit receive data input. When RMII is selected, RXD0 and RXD1 act as 2-bit receive data input. RXD2 and RXD3 act as monitor pins as described below: RXD2 : 10M/100M communications mode information RXD3 : LINK status
64	RXD1		---	---	
65	RXD2		---	---	
66	RXD3		---	---	
70	RXDV	I	---	---	Active high receive data valid input. When RMII is selected, connect to

					the EtherPHY SOC's CRS_DV pin.
71	RXC	I	---	---	Receive clock input Not used when RMII is selected. Requires pull-down.
72	RXER	I	---	---	Active high receive error indicator input.
114	COL	I	---	Pull-down	Active high collision detection input. Not used when RMII is selected. Requires pull-down.
110	CRS	I	---	Pull-down	Active high carrier sense input. Not used when RMII is selected. Requires pull-down.
121	MDIO	IO	---	Pull-down	Control data input/output.
111	MDC	O	Low	---	Control data clock output.
85	PHYCLOCK	O	Low	---	Acts as the Ethernet clock output. The clock precision is the same as for the clock input to the SYSCLK pin. When MII is selected, outputs 25MHz. When RMII, Turbo-MII are selected, outputs 50MHz.
124	LINK	I	---	Pull-up	Acts as the link state input. For more information about the pin level (indicating the presence of the link state), see the specifications for the EtherPHY SOC to which the pin will be connected. A toggle signal indicates that communications are in progress.

### 2.2.3 SDRAM Connection Pins

Table- 3 shows a list of SDRAM connection pins.

**Table- 3 List of SDRAM Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
13	SDDQ0	IO	---	---	16-bit data bus input/output for external SDRAM.
14	SDDQ1		---	---	
15	SDDQ2		---	---	
16	SDDQ3		---	---	
17	SDDQ4		---	---	
18	SDDQ5		---	---	
19	SDDQ6		---	---	
22	SDDQ7		---	---	
49	SDDQ8		---	---	
48	SDDQ9		---	---	
47	SDDQ10		---	---	
43	SDDQ11		---	---	
42	SDDQ12		---	---	
41	SDDQ13		---	---	
38	SDDQ14		---	---	
37	SDDQ15		---	---	
33	SDA0	O	Low	---	13-bit address bus output for external SDRAM.
34	SDA1		Low	---	
36	SDA2		Low	---	
35	SDA3		Low	---	
61	SDA4		Low	---	
60	SDA5		Low	---	
59	SDA6		Low	---	
58	SDA7		Low	---	
56	SDA8		Low	---	
55	SDA9		Low	---	
32	SDA10		Low	---	
54	SDA11		Low	---	
51	SDA12		Low	---	
28	BA0	O	Low	---	Bank address output for external SDRAM.
29	BA1		Low	---	SDRAM transfer clock output.
52	SDCLK	O	Low	---	Bank select / row address strobe output.
26	SDRAS	O	High	---	Command select / column address strobe output.
25	SDCAS	O	High	---	Write enable output.
23	SDDQM0	O	Low	---	Data mask control output.
50	SDDQM1	O	Low	---	

### 2.2.4 Serial Flash Connection Pins

Table- 4 shows a list of serial flash connection pins.

**Table- 4 List of Serial Flash Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
12	CS	O	High	---	Chip select output.
11	MISO	I	---	Pull-down	Serial data input.
10	SCK	O	Low	---	Serial clock output. (50MHz)
9	MOSI	O	Low	Pull-down	Serial data output

### 2.2.5 Serial Communication Connection Pins

Table- 5 shows a list of serial communication connection pins.

**Table- 5 List of Serial Communication Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
94	SERIAL_RXD	I	---	Pull-up	Serial data input.
96	SERIAL_TXD	O	Low	---	Serial data output.

### 2.2.6 General-purpose Ports

Table- 6 shows a list of general-purpose ports.

**Table- 6 List of General-purpose ports**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
138	GPIO0	IO	---	Pull-down	General-purpose port.
139	GPIO1	IO	---	Pull-down	General-purpose port.
140	GPIO2	IO	---	Pull-down	General-purpose port.
142	GPIO3	IO	---	Pull-down	General-purpose port.
143	GPIO4	IO	---	Pull-up	General-purpose port. (*1) Shared with AJTRSTN pin.
144	GPIO5	IO	---	Pull-up	General-purpose port. (*1) Shared with AJTDI pin.
1	GPIO6	IO	---	Pull-up	General-purpose port. (*1) Shared with AJTMS pin.
2	GPIO7	IO	---	Pull-up	General-purpose port. (*1) Shared with AJTCK pin.
3	GPIO8	IO	---	Pull-up	General-purpose port. (*1) Shared with AJRTCK pin.
6	GPIO9	IO	---	Pull-up	General-purpose port. (*1) Shared with AJTDO pin.
7	GPIO10	IO	---	Pull-up	General-purpose port. (*1) Shared with AJSRSTN pin.
8	GPIO12	IO	---	Pull-up	General-purpose port. (*2) Shared with EXTINT pin.

Note:

- In normal mode, all ports are configured as input ports.
- \*1 : When ICE mode is selected, acts as the ICE JTAG pin.
- \*2 : Enabled by register settings.
-

**2.2.7 CPU Peripheral Connection Pin**

Table- 7 shows a list of CPU peripheral connection pin.

**Table- 7 List of CPU Peripheral Connection Pin**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
8	EXTINT	I	---	Pull-up	Active Low external interrupt input. * Shared with GPIO12.

**2.2.8 AC Synchronous Detection Pin**

Table- 8 shows a list of AC synchronous detection pin.

**Table- 8 List of AC Synchronous Detection Pin**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
67	ZEROX	I	---	Pull-up	AC synchronous detection input.

**2.2.9 Clock and Reset Pins**

Table- 9 shows a list of clock and reset connection pins.

**Table- 9 List of Clock and Reset Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
109	SYSCLK	I	---	---	System clock input. (31.25MHz)
130	XTAL	O	---	---	Crystal Oscillator Inverter Output
131	OSCIN	I	---	---	Crystal Oscillator Inverter Input
137	CLKOUT2	O	---	---	$f_{osc}/L$ Clock Output ( $L=1,2,4,8$ )
69	NRESET	I	---	Pull-up	Active low asynchronous reset input.

**2.2.10 DAC Pins**

Table- 10 shows a list of DAC connection pins.

**Table- 10 List of DAC Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
123	IOUTP	O	---	---	IAMP+ Current Output Sink
122	IOUTN	O	---	---	IAMP- Current Output Sink
97	IREF	I	---	---	Reference Current DAC, connect to 8.2kOhm resistor

### 2.2.11 ADC Pins

Table- 11 shows a list of ADC connection pins.

**Table- 11 List of ADC Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
89	RXP	I	---	---	Receive Path Analog Input pin
88	RXN	I	---	---	Receive Path Analog Input pin

### 2.2.12 Test Setting Pin

Table- 12 shows a list of test pins.

**Table- 12 List of Test Setting Pin**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
4	KME_TEST	I	---	Pull-down	Production test mode setting input. In normal operation, this input should be tied to low.
126	MODE	I	---	---	Vendor test purpose only, Fixed to "Low"
127	CONFIG	I	---	---	Vendor test purpose only, Fixed to "Low"

### 2.2.13 Debugger Connection Pins

Table- 13 shows a list of debugger connection pins.

**Table- 13 List of Debugger Connection Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
143	AJTRSTN(Shared)	I	---	Pull-up	JTAG reset signal. * Shared with GPIO4.
144	AJTDI(Shared)	I	---	Pull-up	JTAG test data input. * Shared with GPIO5.
1	AJTMS(Shared)	I	---	Pull-up	JTAG TAP controller mode selection signal. * Shared with GPIO6.
2	AJTCK(Shared)	I	---	Pull-up	JTAG test clock. * Shared with GPIO7.
3	AJRTCK(Shared)	O	Low	Pull-up	JTAG Return TCK output to ICE. * Shared with GPIO8.
6	AJTDO(Shared)	O	Hi-Z	Pull-up	JTAG test data output. * Shared with GPIO9.
7	AJSRSTN(Shared)	I	---	Pull-up	JTAG system reset signal. * Shared with GPIO10.

Note:

- *GPIO10 to GPIO4 cannot be used as general-purpose ports during ICE mode operation.*

## 2.2.14 Hardware Revision Setting Pins

Table- 14 shows a list of hardware revision setting pins. For more information, see Section 4.9.1 Special Pin Settings.

**Table- 14 List of Hardware Revision Setting Pins**

No.	Pin Name	I/O	RST Initial Value	Pull-up/ Pull-down	Description
112	REVISION0	I	---	---	Revision setting
113	REVISION1	I	---	---	Revision setting
115	REVISION2	I	---	---	Revision setting
116	REVISION3	I	---	---	Revision setting
117	REVISION4	I	---	---	Used as ICEMODE setting pin
118	REVISION5	I	---	---	Reserved. Fixed to "Low"

Note:

- Always mount a pull-up resistor or pull-down resistor outside the chip for these pins.

## 2.2.15 Power Supply and VSS Pins

Table- 15 shows a list of power supply and VSS pins.

**Table- 15 List of Power Supply and VSS Pins**

No.	Pin Name	Description
5,21,27,31,40,44,53,57,62,68,76,92, 101,129,133,141	IOVDDW	3.3-V I/O Buffer power supply pins
45	IOVSS	Digital I/O Buffer Ground for AFE chip
20,30,39,75,91,100,120,132	CVDD	1.2-V (core) power supply pins for BaseBand
136	D12VDD	1.2-V (core) power supply pins for AFE
135	DVSS	Digital Ground for AFE
86,93,98	A33VDD	3.3V Analog Power Supply pins for AFE
82,83,95,119	A12VDD	1.2V Analog Power Supply pins
74,84,87,90,99,106,107,108	AVSS	Analog Ground for AFE
102	PLLAVDD	1.2V Analog VDD pin for BaseBand PLL
104	PLLAVSS	Analog Ground pin for BaseBand PLL
103	PLLDVDD	1.2V Digital VDD pin for BaseBand PLL
105	PLLDVSS	Digital Ground for BaseBand PLL
134	OSC33VDD	Crystal Oscillator Buffer 3.3V Power Supply pin
128	OSCVSS	Crystal Oscillator Buffer Ground
Exposed Pad	VSS	Digital Ground

## 2.2.16 Shared Pins

Table- 16 shows a list of shared pins.

**Table- 16 List of Shared Pins**

No.	Pin Name	Shared Pin Name	Description
143	GPIO4	AJTRSTN	Switchable with normal mode/ICE mode settings.
144	GPIO5	AJTDI	Switchable with normal mode/ICE mode settings.
1	GPIO6	AJTMS	Switchable with normal mode/ICE mode settings.
2	GPIO7	AJTCK	Switchable with normal mode/ICE mode settings.
3	GPIO8	AJRTCK	Switchable with normal mode/ICE mode settings.
6	GPIO9	AJTDO	Switchable with normal mode/ICE mode settings.
7	GPIO10	AJSRSTN	Switchable with normal mode/ICE mode settings.
8	GPIO12	EXTINT	Can be switched with GPIO selection register settings.

## 3 Operating Conditions

### 3.1 Absolute Maximum Ratings

Table- 17 shows absolute maximum ratings.

**Table- 17 Absolute Maximum Ratings**

Parameter	Symbol	Rating	Unit
External supply IO voltage	$V_{IOVDDW}$	-0.3 to 4.0	V
External supply Analog voltage	$V_{A33VDD}$	-0.3 to 4.0	V
External supply Analog voltage	$V_{OSC33VDD}$	-0.3 to 4.0	V
Internal supply voltage for BaseBand	$V_{CVDD}$	-0.3 to 1.32	V
Internal supply voltage for AFE (Analog Part)	$V_{A12VDD}$	-0.3 to 1.6	V
Internal supply voltage for AFE (Digital Part)	$V_{D12VDD}$	-0.3 to 1.6	V
Input pin voltage	$V_I$	-0.3 to $V_{IOVDDW} + 0.3$	V
Analog Input/Output Voltage RXP,RXN,IREF	$V_{A1}$	-0.3 to $V_{A33VDD} + 0.3$	V
IOUTP, IOUTN	$V_{A2}$	-0.3 to 6.0	V
OSCIN, XTAL	$V_{A3}$	-0.3 to $V_{OSC33VDD} + 0.3$	V
Output current (2mA)	$I_O$	-5.2/+15.9	mA
Output current (4mA)	$I_O$	-10.6/+31.7	mA
Output current (8mA)	$I_O$	-21.2/+63.4	mA
Power dissipation	$P_D$	700	mW
Storage temperature	$T_{stg}$	-55 to 125	°C

Note:

- The absolute maximum ratings are the limit values beyond which the IC may be damaged. Operation is not guaranteed under these conditions.
- Directly connect all VDD pins to external power supplies and ground all VSS pins.
- Ensure that the junction temperature ( $T_j$ ) is 125°C or less during use.

### 3.2 Recommended Operating Conditions

Table- 18 shows recommended operating conditions.

**Table- 18 Recommended Operating Conditions**

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
External supply voltage	$V_{IOVDDW}$ $V_{A33VDD}$ $V_{OSC33VDD}$	---	3.1	3.3	3.5	V
Internal supply voltage	$V_{CVDD}$ $V_{A12VDD}$ $V_{D12VDD}$	---	1.1	1.2	1.3	V
Operating package surface temperature	$T_C$	$T_j = 125^\circ\text{C}$	-40	---	85	°C

---

## 4 BaseBand Part

### 4.1 Block Diagram

Figure- 3 provides a block diagram for the KL5BVCX400WMP BaseBand part.



**Figure- 3 KL5BVCX400WMP Block Diagram**

## 4.2 List of Functions

### 4.2.1 Microcontroller and Peripherals

• CPU	ARM946E-S with 16 Kbyte Instruction Cache
• System Clock	125MHz
• Interrupt Controller	
• 16bit Timer	8Channels
• Serial Communication Controller	1Channel
• GPIO	
• DMAC	
• Debug Function	Embedded ICE

### 4.2.2 VOC-PHY Function

• Frequency bandwidth	2 MHz to 28 MHz
• Transmission scheme	Wavelet OFDM
• Sampling frequency	62.5 MHz
• Sub carrier	360 carriers (without notch filter: 432 carriers) including flexible notch function
• Primary modulation scheme	32-PAM to 2-PAM
• Transmission speed	240Mbps
• Error correction schemes	LDPC-CC, Reed-Solomon encoding and decoding / convolutional encoding +Viterbi decoding

### 4.2.3 VOC-MAC Processing Function

• Multiple access control method	CSMA/CA
• Data encryption functionality	128bit AES
• Channel estimation control functionality	
• Integrated IEEE 802.3 compliant MAC	
• Integrated SDRAM controller	

### 4.2.4 SPI FLASH Interface Function

• SPI (Serial Peripheral Interface)	Flash memory control functionality
• Clock frequency	50MHz
• Boot RAM	4Kbyte integrated boot RAM

### 4.2.5 SDRAM Interface Functions

• Clock frequency	125MHz
• Data bus width	16-bit
• Support Capacity	16MByte/32MByte
• Row Address	12-bit(16MByte Device)/13-bit(32MByte Device)
• Column Address	8-bit/9-bit(16MByte, 32MByte Device) (8MBytes device is unsupported)

### 4.2.6 Ethernet PHY Interface Functions

• Supported interface	MII/RMII/Turbo-MII
• Clock frequency	25MHz(MII)/50MHz(RMII, Turbo-MII)

### 4.2.7 Clock and Reset Control Functions

• Clock generation	25MHz / 31.25MHz / 50MHz / 62.5MHz / 125MHz / 250MHz
• Reset control functionality	
• Low-power mode control functionality	Link signal monitoring function

## 4.3 Example System Architectures

This section illustrates example normal mode and ICE mode system architectures for the KL5BVCX400WMP. For more information about these modes, see Section 4.6.1 Normal and Test Modes.

### 4.3.1 Normal Mode

Figure- 4 illustrates an example of normal mode system architecture.

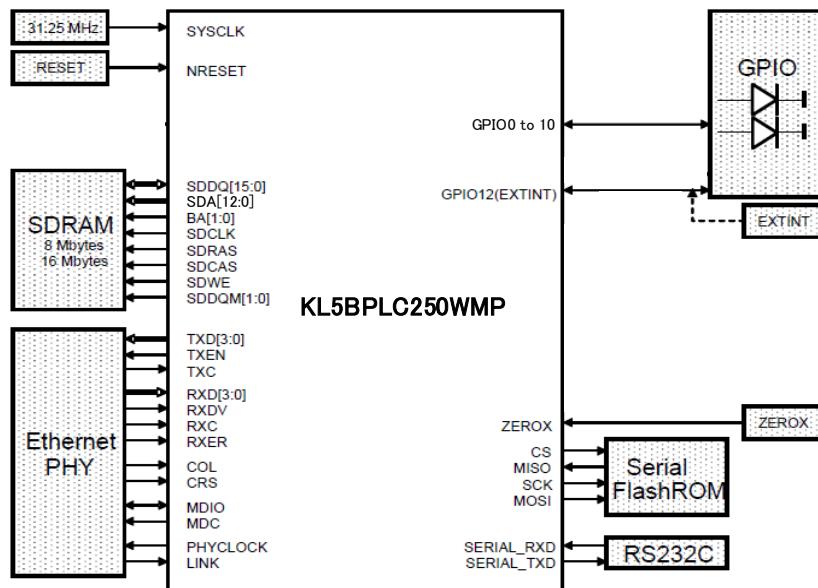


Figure- 4 Normal Mode Connection Diagram

### 4.3.2 ICE Mode

Figure- 5 illustrates an example of ICE mode system architecture.

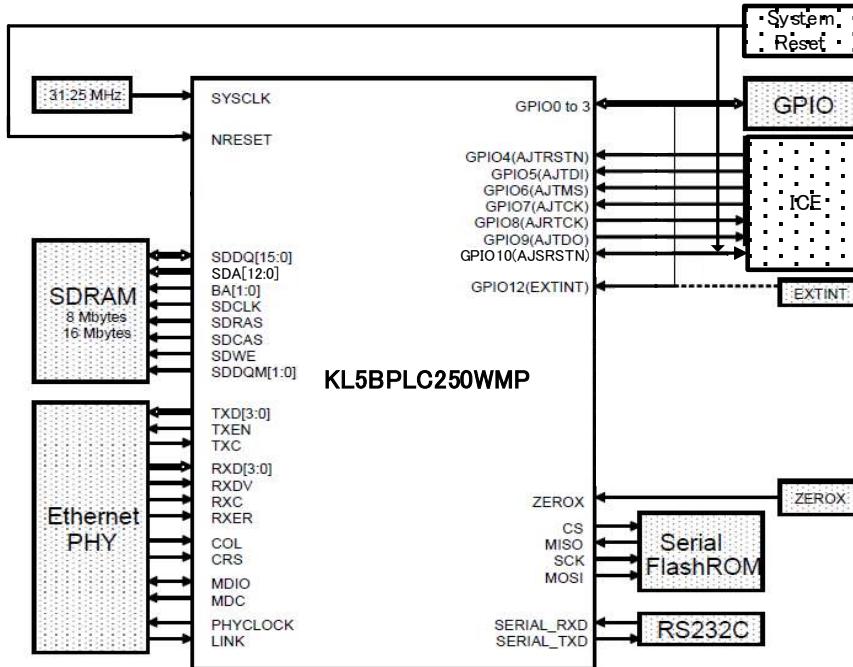


Figure- 5 ICE Mode Connection Diagram

Note:

- *GPIO10 to GPIO4 cannot be used as general-purpose ports during ICE mode operation.*
- *The rest of GPIO can be used as GPO, but not as GPI.*

*After reset, GPIO is set to the input, and turn into the output immediately.*

*\*GPIO12's EXTINT function is available even during ICE mode operation.*

## 4.4 Electrical Characteristics

Table- 19 show electrical characteristics.

**Table- 19 Electrical characteristics**


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input high voltage	$V_{IH}$	---	2.0	---	5.5	V
Input low voltage	$V_{IL}$	---	-0.3	---	0.8	V
Input threshold voltage	$V_T$	---	1.30	1.40	1.50	V
Schmitt Trigger	$V_{T+}$	Low to High	1.56	1.68	1.77	V
	$V_{T-}$	High to Low	1.14	1.23	1.33	V
Input leakage current	$I_{LI}$	$V_I = V_{IOVDDW}$ or $V_{SS}$	---	---	$\pm 10$	$\mu A$
Pull-up resistor	$R_{IH}$	$V_I = V_{SS}$	26	38	59	k $\Omega$
Pull-down resistor	$R_{IL}$	$V_I = V_{IOVDDW}$ or $V_{SS}$	33	47	81	k $\Omega$
Output high voltage	$V_{OH}$	---	2.4	---	---	V
Output low voltage	$V_{OL}$	---	---	---	0.4	V
Output leakage current	$O_{LI}$	$V_I = V_{IOVDDW}$ or $V_{SS}$ $V_O = V_{IOVDDW}$ or $V_{SS}$	---	---	$\pm 10$	$\mu A$

Conditions:  $V_{IOVDDW} = 3.3 \text{ V} \pm 0.3 \text{ V}$ ,  $V_{CVDD} = 1.2 \text{ V} \pm 0.12 \text{ V}$ ,  $-40^\circ\text{C} < T_j < 125^\circ\text{C}$

## 5 Analog Front-End(AFE) Part

### 5.1 General Description

The KL5BVCX400WMP has highly integrated analog front-end part for VoC. Data rate is supported up to 80 MSPS and 160 MSPS in Rx path and Tx path, respectively. Interfacing can be either binary or twos compliment, LSB or MSB first. A serial peripheral interface (SPI) allows software programmability of the front-end. An on-chip PLL multiplier and synthesizer provide all the required clock signals from a single crystal or clock source.

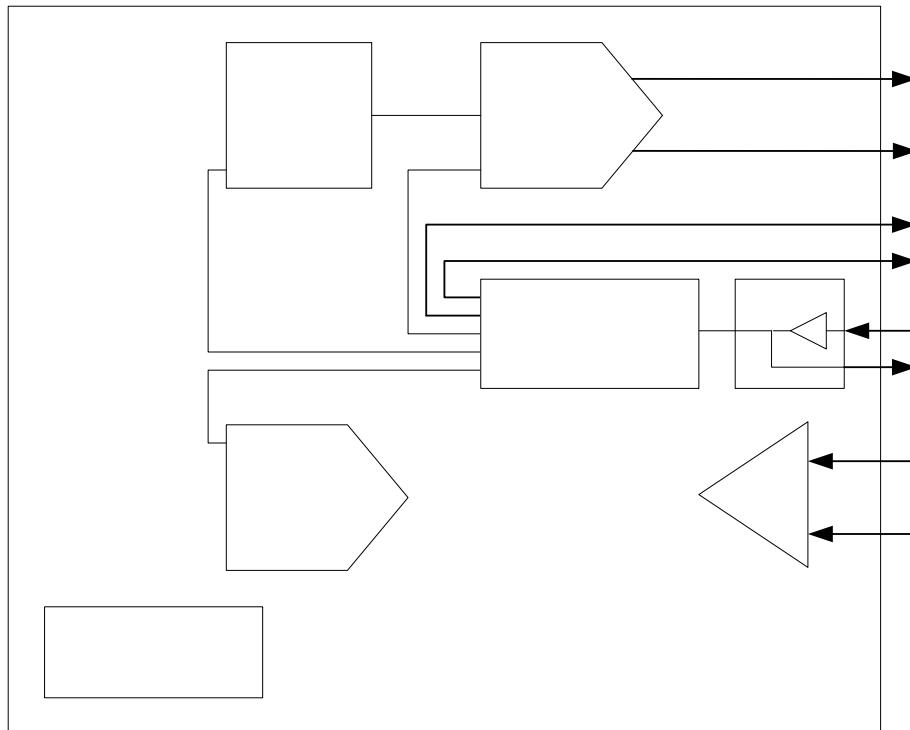

### 5.2.1 Power Supply Specifications

Table- 20 Power Supply Specifications

Parameter	Temp	Min	Typ	Max	Unit
SUPPLY VOLTAGES A12VDD, D12VDD A33VDD , IOVDDW, OSC33VDD	Full Full	1.1 3.1	1.2 3.3	1.3 3.5	V V
POWER CONSUMPTION (HALF-DUPLEX) (f <sub>DATA</sub> = 80 MSPS)					
Tx Mode I <sub>A12VDD</sub> + I <sub>D12VDD</sub> (1.2V Supply Current) I <sub>A33VDD</sub> + I <sub>IO33VDD</sub> + I <sub>OSC33VDD</sub> (3.3V Supply Current)	25°C 25°C		39 37		mA mA
Rx Mode I <sub>A12VDD</sub> + I <sub>D12VDD</sub> (1.2V Supply Current) I <sub>A33VDD</sub> + I <sub>IO33VDD</sub> + I <sub>OSC33VDD</sub> (3.3V Supply Current)	25°C 25°C		70 57		mA mA
POWER CONSUMPTION OF FUNCTIONAL BLOCKS (f <sub>DATA</sub> = 80 MSPS)					
RxPGA (3.3V) ADC (1.2V) TxDAC (3.3V) IAMP + 28 mA output (3.3V) Reference (1.2V) CLK PLL, Synthesizer and 1.2V Logic(Rx)	25°C 25°C 25°C 25°C 25°C 25°C		35 39 4 30 1 30		mA mA mA mA mA mA
MAXIMUM ALLOWABLE POWER DISSIPATION	Full			490	mW
STANDBY POWER CONSUMPTION I <sub>VDD_TOT</sub> (Total Supply Current)	Full		10		mA
POWER DOWN DELAY (USING PWD PIN)					
RxPGA ADC TxDAC IAMP CLK PLL and Synthesizer	25°C 25°C 25°C 25°C 25°C		100 20 20 20 20		ns ns ns ns ns
POWER UP DELAY (USING PWD PIN)					
RxPGA ADC TxDAC IAMP CLK PLL and Synthesizer	25°C 25°C 25°C 25°C 25°C		7 5.5 9 1 410		μs μs μs μs μs
WAKE UP TIME (FROM SLEEP) RxPGA & ADC DAC & IAMP (95% OUTPUT CURRENT)	Full Full			1 1	μs μs

O33VDD=OSC33VDD=A33VDD=3.3V ±0.2V, D12VDD=A12VDD=1.2V ± 0.1V

UNLESS OTHERWISE NOTED

### 5.2.2 Digital Interface Specifications

Table- 21 Digital Interface Specifications

Parameter	Temp	Min	Typ	Max	Unit
CMOS LOGIC INPUTS					
High Level Input Voltage	Full	2.0			V
Low Level Input Voltage	Full			0.8	V
Input Leakage Current	Full			10	µA
Input Capacitance	Full		3		pF
CMOS LOGIC OUTPUTS ( $C_{LOAD} = 5 \text{ pF}$ )					
High Level Output Voltage ( $I_{OH} = 2 \text{ mA}$ )	Full	2.4			V
Low Level Output Voltage ( $I_{OL} = 2 \text{ mA}$ )	Full			0.4	V
Output Rise/Fall Time ( $C_{LOAD} = 16 \text{ pF}$ )	Full		2.2/2.2		ns
Output Rise/Fall Time ( $C_{LOAD} = 5 \text{ pF}$ )	Full		1.2/1.1		ns
RESET					
Minimum Low Pulse Width (Relative to $f_{ADC}$ )		1			Clock cycles

IO33VDD=OSC33VDD=A33VDD=3.3V  $\pm 0.2\text{V}$ , D12VDD=A12VDD=1.2V  $\pm 0.1\text{V}$   
UNLESS OTHERWISE NOTED

## 6 Package

Figure- 24 shows the package outline of KL5BVCX400WMP (Exposed TQFP-144 pins).

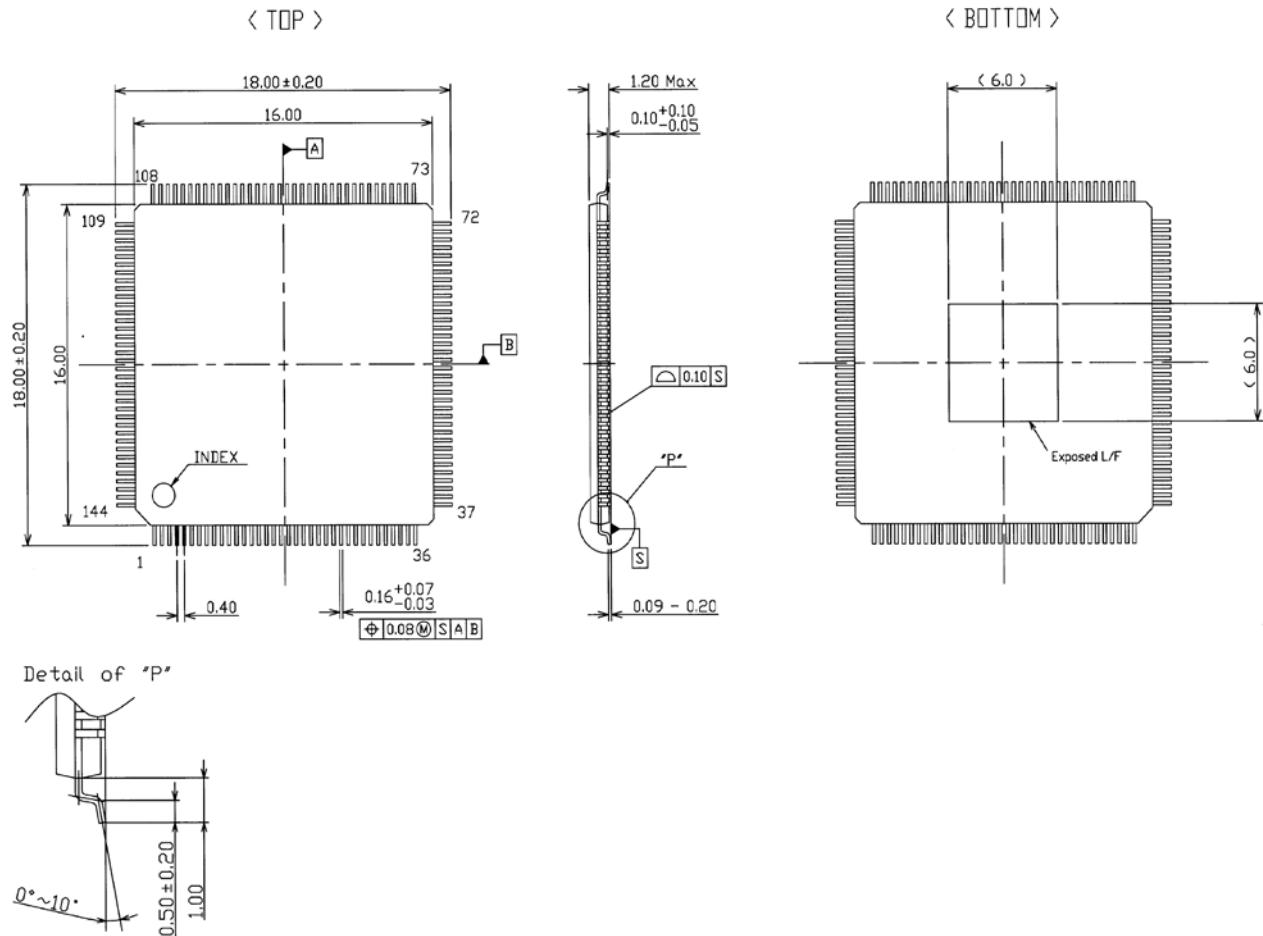


Figure- 7 KL5BVCX400WMP package outline (Exposed TQFP-144 pins)

## 7 Ordering Information

Part Number: KL5BVCX400WMP

### Notice

- Semiconductor products may possibly experience breakdown or malfunction. Adequate care should be taken with respect to the safety design of equipment in order to prevent the occurrence of human injury, fire or social loss in the event of breakdown or malfunction of semiconductor products
- The overview of operations and illustration of applications described in this document indicate the conceptual method of use of the semiconductor product and do not guarantee operability in equipment in which the product is actually used.
- The names of companies and trademarks stated in this document are registered trademarks of the relevant companies.
- MegaChips Corporation provides no guarantees nor grants any implementation rights with respect to industrial property rights, intellectual property rights and other such rights belonging to third parties or/and MegaChips Corporation in the use of products and of technical information including information on the overview of operations and the circuit diagrams that are described in this document.
- The product described in this document may possibly be considered goods or technology regulated by the Foreign Currency and Foreign Trade Control Law. In the event such law applies, export license will be required under said law when exporting the product. This regulation shall be valid in Japan domestic.
- In the event the intention is to use the product described in this document in applications that require an extremely high standard of reliability such as nuclear systems, aerospace equipment or medical equipment for life support, please contact the sales department of MegaChips Corporation in advance.
- All information contained in this document is subject to change without notice.