
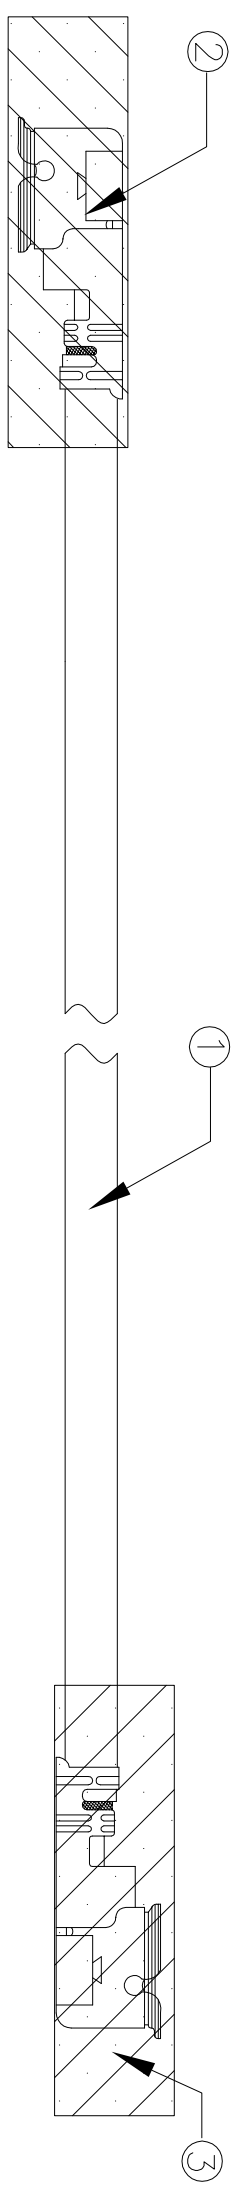


|     |      |          |             |
|-----|------|----------|-------------|
| LOC | DIST | REVISONS |             |
| GP  | 00   | P        | LTR         |
|     |      | A        | NEW RELEASE |
|     |      | DATE     | DWN         |
|     |      | 12FEB09  | CP          |
|     |      |          | LZ          |

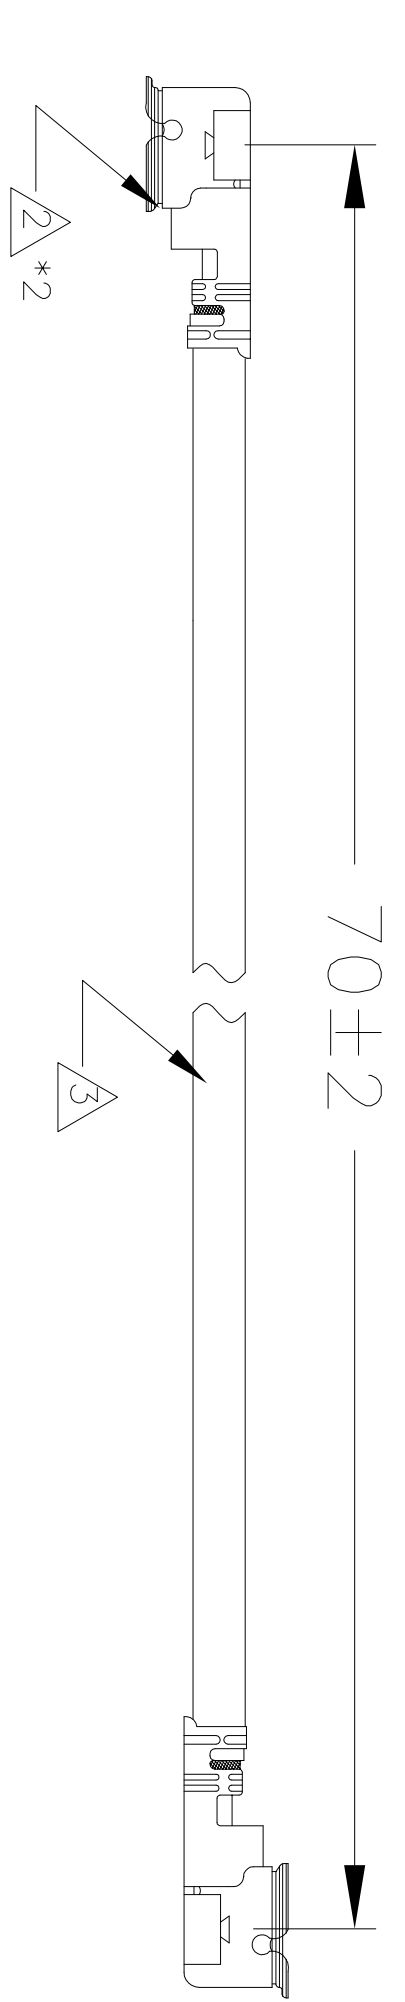


- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  - CONNECTOR: TYPE III U.FL  
 SUPPLIER: I-PEX 20278-112R-13
  - CABLE: 1.13MM OD, JACKET GRAY, 50 OHMS FEP INSULATED  
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
  - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF  
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

|                  |         |             |
|------------------|---------|-------------|
| DWN              | 12FEB09 | Chen Ping   |
| CHK              | 12FEB09 | Andrew Dong |
| APVD             | 12FEB09 | Lucky Zhang |
| PRODUCT SPEC     |         |             |
| APPLICATION SPEC |         |             |
| WEIGHT           |         |             |

|             |  |
|-------------|--|
| DIMENSIONS: | TOLERANCES UNLESS OTHERWISE SPECIFIED: |
| mm [INCHES] |  |
| 0 PLC       | ± -                                    |
| 1 PLC       | ± -                                    |
| 2 PLC       | ± -                                    |
| 3 PLC       | ± -                                    |
| 4 PLC       | ± -                                    |
| ANGLES      | ± -                                    |
| FINISH      |  |

|    |     |                                     |      |
|----|-----|-------------------------------------|------|
| 30 | MM  | PROTECT TUBING FOR I-PEX 20278      | 3    |
| 2  | PC  | I-PEX 20278-112R-13 CONNECTOR       | 2    |
| 70 | MM  | COAXIAL CABLE, GRAY COLOR, OD1.13MM | 1    |
| -1 | U/M | DESCRIPTION                         | ITEM |



|      |           |            |               |
|------|-----------|------------|---------------|
| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| A3   | 00779     | 1513288    |               |

SCALE N.T.S.

SHEET 1 OF 1

REV A

A

A

B

B

C

C

D

D