

2941332

https://www.phoenixcontact.com/us/products/2941332

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Relay module, with soldered-in miniature switching relay, contact (AgNi+Au): small to large loads, 2 changeover contacts, input voltage 48 V AC/DC

#### Your advantages

- · Safe isolation according to DIN EN 50178 between coil and contact
- · Integrated input circuit and interference suppression circuit

#### Commercial data

Item number	2941332
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	C460
Product key	CK6146
Catalog page	Page 135 (IF-2011)
GTIN	4017918080372
Weight per piece (including packing)	56.64 g
Weight per piece (excluding packing)	56.64 g
Customs tariff number	85364190
Country of origin	DE



2941332

https://www.phoenixcontact.com/us/products/2941332

### Technical data

#### Notes

Itilization restriction	
EMC note	EMC: class A product, see manufacturer's declaration in the download area
oduct properties	
Product type	Relay Module
Product family	EMG
Application	Universal
Operating mode	100% operating factor
Mechanical service life	approx. 2x 10 <sup>7</sup> cycles
nsulation characteristics	
Insulation	Basic insulation
	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths
nsulation characteristics: Air clearances and creepage	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths
nsulation characteristics: Air clearances and creepage	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths
	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  e distances between the power circuits
	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  e distances between the power circuits  Basic insulation  Safe isolation, reinforced insulation, and 6 kV between input
Insulation	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  distances between the power circuits  Basic insulation  Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths
Insulation  Overvoltage category  Pollution degree	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  e distances between the power circuits  Basic insulation  Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  II
Insulation  Overvoltage category  Pollution degree	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  e distances between the power circuits  Basic insulation  Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  II  2
Insulation  Overvoltage category  Pollution degree  nsulation characteristics: Air clearances and creepage	Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  distances between the power circuits  Basic insulation  Safe isolation, reinforced insulation, and 6 kV between input circuit and output contact current paths  II  2 distances between input and contact circuit (or output contact current path)

Maximum power dissipation for nominal condition	0.48 W
Test voltage (Winding/contact)	4 kV AC (50 Hz, 1 min., winding/contact)
Test voltage (Contact/contact)	1 kV AC (50 Hz, 1 min., changeover contact/changeover contact)

Air clearances and creepage distances between the power circuits

Rated insulation voltage	260 V AC
Rated surge voltage	2.3 kV

Air clearances and creepage distances between input and contact circuit (or output contact current path)

Rated insulation voltage	260 V AC
Rated surge voltage	6 kV

#### Input data

Coil side



2941332

https://www.phoenixcontact.com/us/products/2941332

Nominal input voltage U <sub>N</sub>	48 V AC/DC
Input voltage range	38.4 V AC/DC 52.8 V AC/DC (20 °C)
Drive and function	monostable
Drive (polarity)	polarized
Typical input current at U <sub>N</sub>	10 mA
Typical response time	8 ms
Typical release time	10 ms
Protective circuit	Bridge rectifier; Bridge rectifier
Operating voltage display	Yellow LED

#### Output data

#### Switching

2 changeover contacts
Single contact
AgNi, hard gold-plated
30 V AC
36 V DC
50 mA
0.2 A
1.2 W (at 24 V DC)

#### Switching: when the gold layer is destroyed

Note	the following values are applicable if a gold layer is destroyed
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A
Maximum inrush current	6 A
Interrupting rating (ohmic load) max.	120 W (at 24 V DC)
	95 W (at 48 V DC)
	60 W (at 60 V DC)
	40 W (at 110 V DC)
	55 W (at 220 V DC)
	1250 VA (for 250 V AC)

#### Connection data

#### Coil side

00.10.00	
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm² 4 mm²
Conductor cross section flexible	0.2 mm <sup>2</sup> 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 12

#### Contact side



2941332

https://www.phoenixcontact.com/us/products/2941332

Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm <sup>2</sup> 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm² 2.5 mm²
Conductor cross section AWG	24 12

#### **Dimensions**

Width	17.5 mm
Height	75 mm
Depth	62.5 mm

#### Environmental and real-life conditions

#### Ambient conditions

Ambient temperature (operation)	-20 °C 40 °C
Ambient temperature (storage/transport)	-20 °C 70 °C

#### Standards and regulations

Air clearances and creepage distances between the power circuits

Standards/regulations	EN 50178		
Air clearances and creepage distances between input and contact circuit (or output contact current path)			
Standards/regulations	EN 50178		

#### Standards/regulations

#### Mounting

Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any




2941332

https://www.phoenixcontact.com/us/products/2941332

### Drawings

#### Circuit diagram

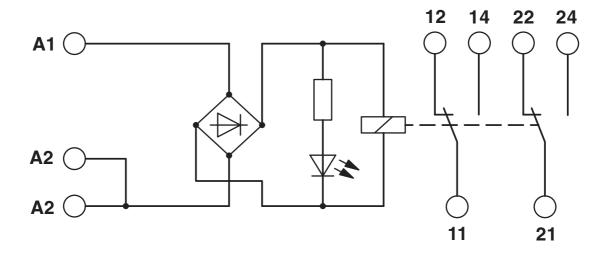



2941332

https://www.phoenixcontact.com/us/products/2941332

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/2941332



**cUL Recognized**Approval ID: FILE E 238705





**UL Recognized**Approval ID: FILE E 238705



EAC

Approval ID: TR\_TS\_D\_00573\_c



**EAC** 

Approval ID: RU\*C-DE.\*08.B.00010

cULus Recognized



2941332

https://www.phoenixcontact.com/us/products/2941332

### Classifications

#### **ECLASS**

	ECLASS-11.0	27371601		
	ECLASS-12.0	27371601		
	ECLASS-13.0	27371601		
ETIM				
	ETIM 8.0	EC001437		
UNSPSC				
	UNSPSC 21.0	39122300		



2941332

https://www.phoenixcontact.com/us/products/2941332

### Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com