

SK Series

High-Precision Regulated HV DC to DC Converter

Miniature Size (1.75"L x 1.10"W x 0.50"H)

**Easy to Use, No External Components
Required**

Excellent Load and Line Regulation

Extremely Low Quiescent Current

Miniature PC Board Mountable Package

Low Ripple and EMI/RFI

**High Impedance Programming Input
($>75k\Omega$)**

**Wide Operating Temp Range (-40°C to
+60°C)**




Mechanical Characteristics

- **Weight:** 23 grams typical
- **Packaging:** Encapsulated in high performance epoxy
- **Shield Material:** Copper Adhesive

Environmental Characteristics

- **Operating Temp Range:** -40°C to +60°C
- **Storage Temp Range:** -55°C to +85°C

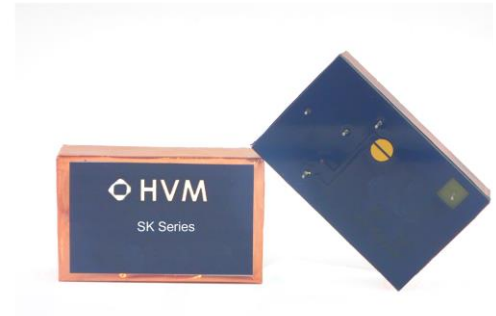

Description

The **SK Series** is a family of miniature single-output, fully regulated DC to DC converters supplying 3kV to 5kV @1W in 0.9625 cubic inches (1.75"L x 1.10"W x 0.50"H). These ultra-compact converters are ideal for applications requiring small size and ease of use. A high impedance programming input makes it very easy to use, eliminating the need for a low impedance adjustable power source voltage.

HVM's proprietary, ultra-compact resonant converter design minimizes quiescent current and operating noise while delivering maximum performance and reliability. The **SK Series** is sold with a factory installed copper adhesive shield for further noise reduction.


The devices operate directly from 5VDC or 12VDC ± 0.5 VDC input. Output voltage is independent of input power voltage and is proportional to the programming voltage (0 to 5V produces 0 to full scale output) and features excellent linearity. Adjustment pads are available to calibrate the unit to $\pm 5\%$ outside of factory settings. The output power rating is 1W. The **SK Series** is very stable over a wide operating temperature range.

The **SK Series** is available with alternate output voltages. Consult sales for additional information.



www.hvmtech.com


APPLICATION SCHEMATIC

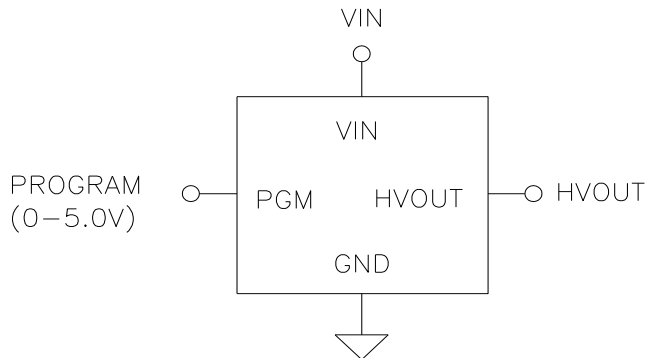

ELECTRICAL CHARACTERISTICS

Input Voltage (VIN)	5V or 12V \pm 0.5V
Programming Voltage:	0 to 5V (produces 0 to rated output)
Programming Input Impedance:	>10k Ω
Output Tolerance at No Load:	\pm 5%
Oscillator Frequency:	50kHz to 100kHz
Load Regulation:	<0.5%
Line Regulation:	0.01%
Output Ripple at Full Load:	<1%
Calibration Adjustment:	Cal Up and Cal Down pads are active when attached to GND. \pm 5% voltage adjustment typical.
Efficiency:	60% typical at full load

DIMENSIONS

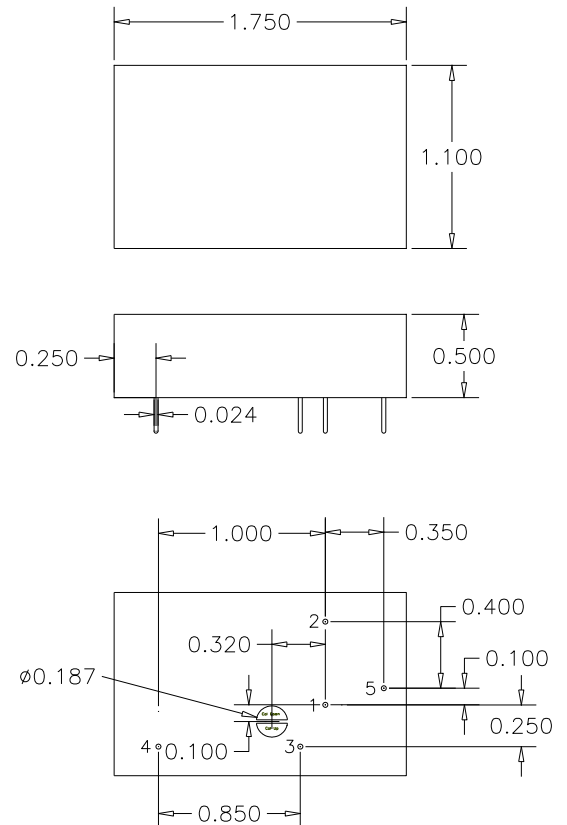

PIN #	FUNCTION
1	VIN
2	GND
3	PROGRAM
4	HVOUT
5	CASE GND

HVM TECHNOLOGY, INC., 360 McKenna Ave, New Braunfels, TX 78130
 Tel: (830) 626-5552 / www.hvmtech.com / email: sales@hvmtech.com



www.hvmtech.com

Model Selection Guide

MODEL	Input Voltage	Output Voltage	MAX Output Current	Input Current No Load	Input Current Max Load
SK0530	5V	0 to +3kV	333 μ A	<35mA	<350mA
SK0530N	5V	0 to -3kV	333 μ A	<35mA	<350mA
SK0540	5V	0 to +4kV	250 μ A	<35mA	<350mA
SK0540N	5V	0 to -4kV	250 μ A	<35mA	<350mA
SK0550	5V	0 to +5kV	200 μ A	<35mA	<350mA
SK0550N	5V	0 to -5kV	200 μ A	<35mA	<350mA
SK1230	12V	0 to +3kV	333 μ A	<35mA	<350mA
SK1230N	12V	0 to -3kV	333 μ A	<35mA	<350mA
SK1240	12V	0 to +4kV	250 μ A	<35mA	<350mA
SK1240N	12V	0 to -4kV	250 μ A	<35mA	<350mA
SK1250	12V	0 to +5kV	200 μ A	<35mA	<350mA
SK1250N	12V	0 to -5kV	200 μ A	<35mA	<350mA

HVM TECHNOLOGY, INC., 360 McKenna Ave, New Braunfels, TX 78130
Tel: (830) 626-5552 / www.hvmtech.com / email: sales@hvmtech.com