


NYLARIMP

MATERIAL: Copper
 PLATING: Electro-Tin (.0003 Min.)
 INSULATION: Nylon, Color coded Blue
 STUD SIZES: "D" ±.005

Optional Configuration


SD027

- 14 - .265"
- 56 - .328"
- 38 - .390"
- 76 - .453"
- 12 - .515"
- 58 - .656"
- 34 - .781"
- 78 - .906"

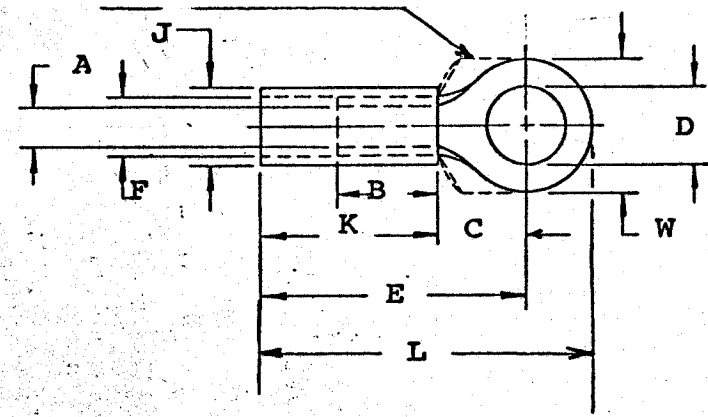

Part Number	"W"	"C" Min.	"E" Max.	"K" Max.	"L" Max.	"A" Min.Avg.	"F" (MWID)	Stock Thickness	"J" Max.	"B" Min.	Available Stud Size
*H-780-	.894 .870	.740	2.159	1.359	2.581	.430	.595	.075	.750	.660	14, 56, 38, 76 12
H-781-	.833 .807	.740	2.159	1.359	2.539	.430	.595	.075	.750	.660	14, 56, 38
H-782-	1.270 1.244	1.276	2.691	1.359	3.300	.430	.595	.075	.750	.660	38, 12, 58, 34 78

NOTE: (MWID) denotes maximum wire insulation diameter.

 INCORPORATED CLEVELAND, OHIO	TITLE: CUSTOMER DRAWING 1/0 WIRE RANGE (H) RING TONGUE TERMINAL	DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED			REVISION SCALE: _____ DATE DRWN. BY: JTK 1-21-70 CHKD. BY: APPRD. BY: DRAWING NO.:
		FRAC.	DEC.	ANG.	
		±	±	±	