

Mechanically held lighting contactor, Contactor amp rating 20A, 0 N.C. / 8 N.O. poles, Non-combination type, Enclosure NEMA type 1, Indoor general purpose use



Figure similar

product brand name	Class CLM
design of the product	Mechanically held lighting contactor
special product feature	Energy efficient; Quiet operation
<b>General technical data</b>	
weight [lb]	9 lb
Height x Width x Depth [in]	14 × 8 × 7 in
touch protection against electrical shock	NA for enclosed products
installation altitude [ft] at height above sea level maximum	6560 ft
country of origin	USA
<b>Contactor</b>	
size of contactor	20 Amp
number of NO contacts for main contacts	8
number of NC contacts for main contacts	0
operating voltage for main current circuit at AC at 60 Hz maximum	600 V
contact rating of the main contacts of lighting contactor	
<ul style="list-style-type: none"> <li>● at tungsten (1 pole per 1 phase) rated value</li> <li>● at tungsten (2 poles per 1 phase) rated value</li> <li>● at tungsten (3 poles per 3 phases) rated value</li> <li>● at ballast (1 pole per 1 phase) rated value</li> <li>● at ballast (2 poles per 1 phase) rated value</li> <li>● at ballast (3 poles per 3 phases) rated value</li> <li>● at resistive load (1 pole per 1 phase) rated value</li> <li>● at resistive load (2 poles per 1 phase) rated value</li> <li>● at resistive load (3 poles per 3 phases) rated value</li> </ul>	20A @250V 1p 1ph 20A @250V 2p 1ph 20A @250V 3p 3ph 20A @347V 1p 1ph 20A @600V 2p 1ph 20A @600V 3p 3ph 30A @347V 1p 1ph 30A @600V 2p 1ph 30A @600V 3p 3ph
<b>Auxiliary contact</b>	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of total auxiliary contacts maximum	4
contact rating of auxiliary contacts of contactor according to UL	NA
<b>Coil</b>	
type of voltage of the control supply voltage	AC
control supply voltage	
<ul style="list-style-type: none"> <li>● at AC at 50 Hz rated value</li> <li>● at AC at 60 Hz rated value</li> </ul>	208 ... 240 V 208 ... 240 V
apparent pick-up power of magnet coil at AC	600 VA
apparent holding power of magnet coil at AC	6 VA
operating range factor control supply voltage rated value	0.85 ... 1.1

of magnet coil	
<b>Enclosure</b>	
degree of protection NEMA rating of the enclosure	NEMA 1 enclosure
design of the housing	indoors, usable on a general basis
<b>Mounting/wiring</b>	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf-in] for supply	18 ... 18 lbf-in
type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf-in] for load-side outgoing feeder	18 ... 18 lbf-in
type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf-in] at magnet coil	18 ... 18 lbf-in
type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded	2x (18 ... 10 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
<b>Short-circuit current rating</b>	
design of the fuse link for short-circuit protection of the main circuit required	none
design of the short-circuit trip	Thermal magnetic circuit breaker
breaking capacity maximum short-circuit current (Icu)	
• at 240 V	5 kA
• at 480 V	5 kA
• at 600 V	5 kA
certificate of suitability	NEMA ICS 2; UL 508; CSA 22.2, No. 14

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLM1B08240>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1B08240>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CLM1B08240&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLM1B08240&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLM1B08240/certificate>

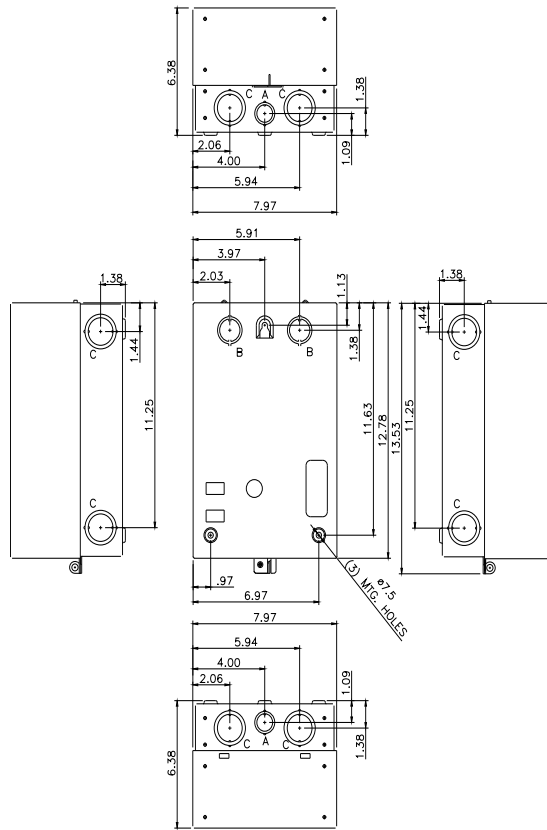

LETTER	KNOCKOUT & CONDUIT SIZE
A	ø22.2 X ø28.6 FOR 12.7 & 19 CONDUIT
B	ø28.6 X ø34.9 FOR 19 & 25.4 CONDUIT
C	ø34.9 X ø43.6 FOR 25.4 & 31.8 CONDUIT

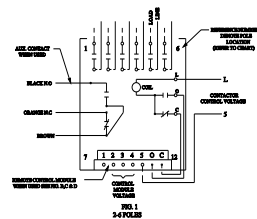


FIG. 1  
3-Ø MOTOR

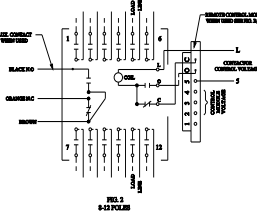


FIG. 2  
3-Ø MOTOR

POLES	LOCATION
2	2 & 5
3	2, 3 & 5
4	2, 3, 4 & 5
6	1 - 6
8	1 - 6, 8 & 11
10	1 - 6, 8, 10 & 11
12	1 - 12

ATTRIBUTARY CONTACT RATING	ACC. CLASSIFICATION (IEC 60947-5-1)
10A, 10 EP	23TVC
0.5A, 10 EP	23TVC
0.5A, 10 EP	23TVC

MAIN CONTACT MAXIMUM VOLTAGE RATINGS OPEN OR CLOSED		
POLES TO LOAD	3 FOR 1	AMPERE CONTINUOUS
1 FOR 1	3 FOR 1	TUNGSTEN
20 AC	20 AC	20 BALLAST
27 AC	40 AC	50 GENERAL
27 AC	60 AC	

3Ø AMP. 2C	127V DC MAX. 3 POLES IN SERIES
GENERAL	200V DC MAX. 3 POLES IN SERIES

SYSTEM IS SUITABLE FOR USE IN A CIRCUIT CAPABLE OF DELIVERING NOT MORE THAN THE RATED SHORT-CIRCUIT CURRENT AT THE MAXIMUM VOLTAGE RATED IN THESE RATINGS. THESE RATINGS APPLY TO A 50 AMP. CIRCUIT BREAKER IN THE OPEN POSITION. THE RATING OF THE MAIN CONTACTS IS NOT LESS THAN THE VALUES SHOWN.

AMPERES	VOLTS
20,000	250
14,000	400
10,000	600

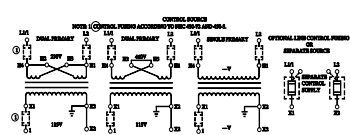


FIG. 3  
2 WIRE CONTROL



FIG. 4  
2 WIRE CONTROL ACC. 47




FIG. 5  
2 WIRE CONTROL ACC. 47




FIG. 6  
3 WIRE CONTROL ACC. 48




FIG. 7  
3 WIRE CONTROL ACC. 48



FIG. 8  
ON-OFF POINT CONTROL ACC. 49

MODULE TERMINAL	CONNECT TO
1	NOT USED
2	CONT. STATION FOR ACC. 48 & 49
3	CONT. STATION FOR ACC. 47 & 48
4	MODULE CONTROL VOLTAGE*
5	CONTROLLER CONTROL VOLTAGE
O	TERMINAL OF CONTACTOR
C	TERMINAL OF CONTACTOR

\* FOR 10 CONTROL MODULES CONNECT TERMINAL 4 TO TERMINAL 5

- GENERAL NOTES**
- WIRE CONTACTOR & 2 LINE VOLTAGE ARE THE SAME. THE CONTACTOR CONTROL VOLTAGE CAN BE DERIVED FROM THE LINE POLES OF THE CONTACTOR DEVICE.
  - MAIN CONTACTS ARE SHOWN IN OPEN POSITION WITH CONTROL LINES UNBROKEN. THE LAMP BULB (SWITCH) SHOWN WITH CONTACTS CLOSED.
  - LINE & LOAD TERMINALS ARE REVERSIBLE.
  - CONTACTS AND SINGLE THROW POINTS BREAK WITH UNIFORMITY IF PROVIDED WITH COIL OPERATOR MECHANICALLY TRIP IN OPEN OR A CLOSED POSITION.
  - CUSTOMER CONNECTIONS TO LINE & LOAD WILL ACCEPT NO. 10 AMP TO 1000 AMP WIRE TERMINAL POLE CONNECTION TO 10, 15, 20.
  - CUSTOMER CONNECTIONS TO ELECTRONIC MODULES (ACC. 47, 48, 49) WILL ACCEPT NO. 12 AMP TO 1000 AMP COPPER WIRE TORQUE CONTROL TERMINALS TO 15, 16.
  - CONTROL MODULE VOLTAGE SUPPLIED BY CONTROLLER.

24306100401

last modified:

1/25/2022

