
# Slide Switches

With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- O PCB and solder terminals
- O Voltage Selector Models
- O Snap in and flange mounting
- Q 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators



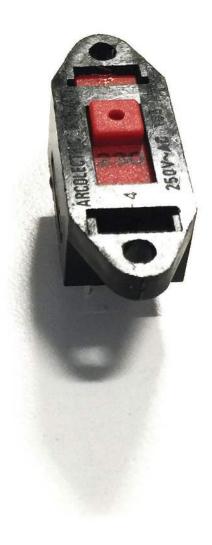

bulgin

# 2000 Slide Switches - up to 5 position

10A 250Vac



### **Key Features**

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- O Choice of actuators

## Approvals and specifications

- 40 10A 250Vac T85
   6(3)A 250Vac T85
- ₩ UL CSA 16A 250Vac Non Inductive UL CSA 4A 300Vac UL 65°C, file no. E45221, CSA file no. LR10990

bulgin

μ contact gap Please specify: Standard action (SP116) or Light action (SP118). 2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
K <sup>*</sup> <sup>*</sup> <sup>*</sup> <sup>*</sup> <sup>*</sup> <sup>*</sup> <sup>*</sup> <sup>*</sup>	2	2 Switching positions	$ \begin{array}{c} 10 \\ 5 \\ 6 \\ 4 \\ 20 \\ 5 \\ 6 \\ 4 \\ 2 \end{array} $ 30 $ \begin{array}{c} 5 \\ 3 \\ 6 \\ 4 \\ 2 \end{array} $	0 6 D L $\xrightarrow{5,889}_{+21,0+1}$ $\xrightarrow{5,889}_{+7,9}$ $\xrightarrow{7,9}_{+7,5}$ $\xrightarrow{7,9}_{+7,5}$ $\xrightarrow{7,9}_{+7,5}$ $\xrightarrow{7,9}_{+7,5}$ $\xrightarrow{1}_{15,5}$ $\xrightarrow{1}_{15,5}$ $\xrightarrow{1}_{15,5}$ $\xrightarrow{1}_{15,5}$ $\xrightarrow{1}_{15,6}$
R 01.2-03.6*‡ 2.8×0.8		<b>3</b> Switching positions	$\begin{array}{c} 6 & 4 & 2 \\ 40 & 5 & 3 & 1 \\ \hline 6 & 4 & 2 \\ \hline 10 & 6 & 4 & 2 \\ 20 & 7 & 5 & 3 & 1 \\ \hline 6 & 6 & 4 & 2 \\ \hline 20 & 7 & 5 & 3 & 1 \\ \hline 6 & 6 & 4 & 2 \\ \hline 7 & 5 & 3 & 1 \\ \hline 8 & 6 & 4 & 2 \\ \hline 8 & 6 & 4 & 2 \\ \hline \end{array}$	1 7 E N 7 = 1 $7 = 1$ $7 =$
$\begin{array}{c} \underline{\mathbf{x}} \\ \underline{\mathbf{x}} \\$		<b>4</b> Switching positions	$\begin{array}{c} 30 & \boxed{7 & 5 & 3 & 1} \\ & & 6 & 4 & 2 \\ 40 & \boxed{7 & 5 & 3 & 1} \\ & & 6 & 4 & 2 \\ 10 & \boxed{9 & 7 & 5 & 3 & 1} \\ & & & 10 & 8 & 6 & 4 & 2 \\ 20 & \boxed{9 & 7 & 5 & 3 & 1} \\ & & & & 0 & 8 & 6 & 4 & 2 \\ 30 & \boxed{9 & 7 & 5 & 3 & 1} \\ & & & & & 0 & 8 & 6 & 4 & 2 \\ \end{array}$	$3 \qquad A \qquad H \qquad R$
$\begin{array}{c} \\ \hline \\ $		5 Switching positions	$\begin{array}{c} 10 & 8 & 6 & 4 & 2 \\ 10 & 8 & 6 & 4 & 2 \\ 10 & \frac{9}{2} & \frac{7}{5} & \frac{5}{3} & \frac{1}{1} \\ 10 & \frac{11}{9} & \frac{7}{5} & \frac{5}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 20 & \frac{11}{9} & \frac{7}{5} & \frac{5}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 30 & \frac{11}{9} & \frac{7}{5} & \frac{5}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 11 & 9 & 7 & 5 & \frac{3}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 11 & 9 & 7 & 5 & \frac{3}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 11 & 9 & 7 & 5 & \frac{3}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 11 & 9 & 7 & 5 & \frac{3}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ 11 & 9 & 7 & 5 & \frac{3}{3} & \frac{1}{1} \\ 12 & 10 & 8 & 6 & 4 & 2 \\ \end{array}$	4 B J S $\downarrow \downarrow $



# Examples





T2220EC - - -

- T23206A - - -

😈 T24306A - - -



Body	Options	Dimensions		
C 2 positions H 2 positions	Colour Call sales for custom	C 2 positions H 2 positions Cut-out /PCB Matrix		
	colours. A full range is available for large orders. Legend printing A wide range is available For all options	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		
A <sub>3 positions</sub> H <sub>3 positions</sub>	call sales	A <sub>3 positions</sub> H <sub>3 positions</sub>		
		30.0 5.8 5.8 5.8 5.8 5.8 5.8 5.8 5.8		
A 4 positions H 4 positions		A <sub>4 positions</sub> H <sub>4 positions</sub>		
		$\begin{array}{c ccccccccccccccccccccccccccccccccccc$		
A 5 positions		▲ 5 positions		

# 2000 Slide Switches - Snap fit and panel mount

10A 250Vac





115/230 is preferred legend

### **Key Features**

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- O PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

### Approvals and specifications

- IOA 250Vac T85
   6(3)A 250Vac T85
- **N**© UL CSA 16A 250Vac Non Inductive UL CSA 4A 300Vac UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap Please specify: Standard action (SP116) or Light action (SP118). 2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
	2	2 Switching positions	$10 \qquad \underbrace{\begin{smallmatrix} 5 & 3 & 1 \\ \bullet & \bullet & \bullet \\ 6 & 4 & 2 \end{smallmatrix}$	0 6 C L 5889 $5889$ $79$ $79$ $79$ $79$ $79$ $79$ $79$ $7$
2.8 x 0.8			<b>20</b> $5 \ 3 \ 1$ $6 \ 4 \ 2$	2   7   D   M
<b>R</b> 01.2→0 3.6*↓ 2.8 × 0.8			<b>30</b> 5 3 1 6 4 2	$3 \qquad 8 \qquad E \qquad N$
			<b>40</b> 5 3 1 6 4 2	4 9 H P
Solder		<b>3</b> Switching positions	<b>10</b> $\begin{array}{c} 7 & 5 & 3 & 1 \\ \bullet & \bullet & \bullet & \bullet \\ 8 & 6 & 4 & 2 \end{array}$	4 9 $H$ $P$ $\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array}$
▲ 5.6 ↓ PCB 0.8 Sq. For mounting stability switches have extra *support* terminals * Nominal - Dimension varies			$20  \boxed{\begin{array}{c} 7 & 5 & 3 & 1 \\ \bullet & \bullet & \bullet \\ \bullet & \bullet & \bullet \\ 8 & 6 & 4 & 2 \end{array}}$	
with body type. For exact figure call sales			$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	S T
			<b>40</b> 7 5 3 1 <b>40</b> 8 6 4 2	



### Examples



T22208E - - -

T22308E - - -

T2230MF - - -

- T22205B - - -





ॉ T23204B - - -

