


Dimension



Dim.A	Nx5.0
Dim.B	(N-1)x5.0

N=Number of poles

Poles	Tol
2p-8p	±0.20
9p-16p	±0.30
17p-24p	±0.40

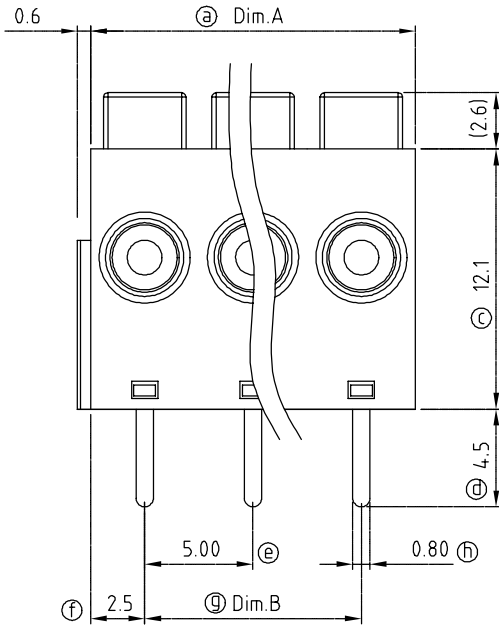

N=NUMBER OF CONTACTS

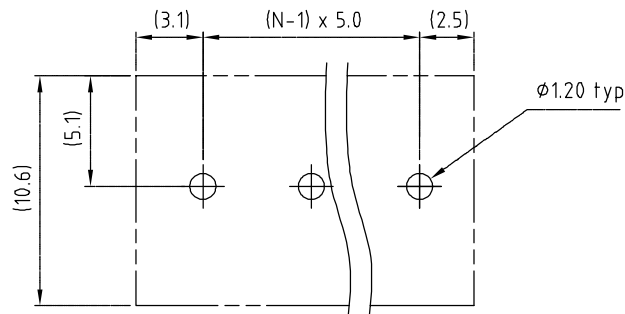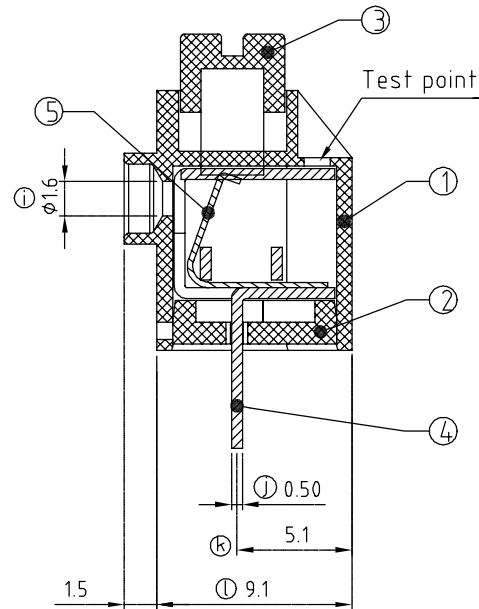

P.C.B. LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
△	10/6'06	Added cULus standard	Steady
△	2/26'07	The Soldering temperature from 245° to 250°	Aaron
△	4/18'11	Operating temperature is changed	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Insulating body Thermoplastic (UL94V-0)
- Item 2 Insulating cover Thermoplastic (UL94V-0)
- Item 3 Insulating lever Thermoplastic (UL94V-0)
- Item 4 Contact pin Brass, Tin plated
- Item 5 Spring clamp Stainless steel

△ Electrical cULus

- Voltage rating: 300VAC
- Current rating: 7A
- Wire range:
- Solid wire(AWG): 18-22
- Stranded wire(AWG):
- Wire strip length: 7-7.5mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:

PART NO.

HY xx 00 x 0 xxxx G

NO of Poles

- 02 2Contacts
- 03 3Contacts
- 24 24Contacts

- Color
- 0 Black
 - 5 Green
 - 6 Blue
 - 8 Grey

RoHS
Pb<40,000ppm

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HY 5.0mm Series				DWG NO.	8HY0001	
PART NO.	HYxx00x0xxxxG			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance			
			Chen Bo 2011.04.18		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
SHEET: 01/01				REV.: F	X.XX	±0.10	
					X°	±1°	