

Bellnix High Efficiency, Minimum Size, Non-Isolated Type POL DC-DC Converter

Minimum Size, High power 40W!

8A/12A BSI-POWER Series RoHS Compliance



Ultra High Efficiency (95%), Minimum Size Step-Down DC-DC Converter

Input: +5V, +12V **Output: +3.3V (+1.0V to +3.3V)**
Input: +12V **Output: +5.0V (+5.0V to +6.0V)**


- Efficiency 93%-95%
- Input Voltage Range 4.5V-13.6V
- Output Voltage Range 1.0V-3.3V
5V-6V
- Latest Technology, Synchronous Rectification Circuit
- Heat Sink Not Required
- Adjustable Output Voltage
- Non-Isolated Type Converter
- Short Circuit, Over-Current Protection
- No Electrolytic Capacitor used
- No Tantalum Capacitor used
- Ultra Small Size
- Remote ON/OFF Control
- MTBF 900,000Hrs
- High Reliability, High Performance
- 40W+40W=80W
- Parallel Operation Possible
(Application note available)
- Operating Temp Range
-10°C to +70°C
(Temp Derating Required)
- RoHS Compliance

Models	Input V Vdc	Output V Vdc	Output I A	Line Reg % (typ.)	Load Reg % (typ.)	Ripple/Noise mVpp (typ.)	Efficiency % (typ.)
BSI-3.3S12R0F	4.5-13.6	3.3 (1.0-3.3)	0-12	0.3	0.25	40	93
BSI-5.0S8R0F	8-13.6	5.0 (5.0-6.0)	0-8	0.2	0.2	60	95

Note 1: The output voltage inside the () indicates the adjustable range.
 Note 2: External capacitors are required.
 Note 3: Airflow maybe required depending on the ambient temperature.

<Outline>


BSI-3.3S12R0F/ BSI-5.0S8R0F

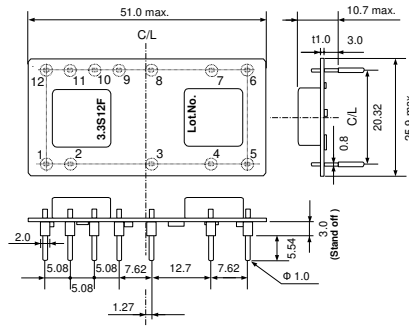

pin	Function
1	ON/OFF
2	S.GND
3	+Vin
4	-Vin
5	NC
6	-Vs
7	-Vout
8	+Vout
9	+Vs
10	NC
11	V.ADJ 1
12	V.ADJ 2

Units: mm Weight: 13g typ.
 Tolerances unless otherwise specified: ±0.5
 Non-coated externally

<Standard Connection Diagram>

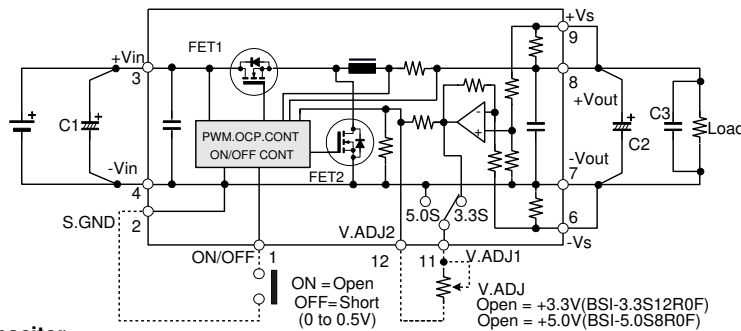

- External Capacitor

- C1: 68μF(ESR=34mΩ or less)×2pcs or more *2 (Recommended: OS-CON)
*2 BSI-5.0S8R0F: 1pce or more
- C2(Vout=3.3V): 220μF(ESR=28mΩ or less)×2pcs or more (Recommended: OS-CON)
- C2(Vout=5.0V): 150μF(ESR=30mΩ or less)×1pcs or more (Recommended: OS-CON)
- C2(Vout<1.7V): 330μF(ESR=25mΩ or less)×3pcs or more (Recommended: OS-CON)

- ON/OFF Control

ON/OFF control is controlled by opening and shortening between 1pin (ON/OFF) and 2pin (S.GND).
 Output ON = Open (Max. 6V occurs at 1pin.)
 Output OFF = Short (0-0.5V 500μA max.)

- Adjustable Output Voltage

The output voltage is adjustable by connecting a resistor between 11pin (V.ADJ1) and 12pin (V.ADJ2).
 When 11 and 12pin are open, the following rating voltage is as follows
 BSI-3.3S12R0F = 3.3V±4% BSI-5.0S8R0F = 5.0V±4%

- Remote Sensing

9pin (+Vs), 6pin (-Vs) are remote sensing pins. Be sure to wire without making a loop.

- Note!
 This catalogue is an outline of the products. When designing, be sure to refer to the data sheets.