SIEMENS

Data sheet 3RV2011-1JA15



Circuit breaker size S00 for motor protection, CLASS 10 A-release 7...10 A N release 130 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC

product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For motor protection	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S00	
size of contactor can be combined company-specific	S00, S0	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
 at AC in hot operating state 	9.25 W	
at AC in hot operating state per pole	3.1 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25g / 11 ms	
mechanical service life (switching cycles)		
 of the main contacts typical 	100 000	
of auxiliary contacts typical	100 000	
electrical endurance (switching cycles) typical	100 000	
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD	
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	10/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
 during operation 	-20 +60 °C	
 during storage 	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Main circuit		
number of poles for main current circuit	3	
adjustable current response value current of the current-dependent overload release	7 10 A	
operating voltage		
• rated value	20 690 V	
 at AC-3 rated value maximum 	690 V	
 at AC-3e rated value maximum 	690 V	

operating frequency rated value	50 60 Hz
operational current rated value	10 A
operational current	
at AC-3 at 400 V rated value	10 A
• at AC-3e at 400 V rated value	10 A
operating power	
• at AC-3	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
• at AC-3e	
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
design of the auxiliary switch	transverse
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
● at 24 V	2 A
● at 120 V	0.5 A
● at 125 V	0.5 A
● at 230 V	0.5 A
operational current of auxiliary contacts at DC-13	
● at 24 V	1 A
● at 60 V	0.15 A
Protective and monitoring functions	
product function	
 ground fault detection 	No
phase failure detection	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (Icu)	
 at AC at 240 V rated value 	100 kA
 at AC at 400 V rated value 	100 kA
 at AC at 500 V rated value 	42 kA
at AC at 690 V rated value	6 kA
breaking capacity operating short-circuit current (Ics)	
at AC	100 kA
at 240 V rated value at 400 V rated value	100 kA
• at 400 V rated value	100 kA
at 500 V rated value	10 kV
at 500 V rated value at 600 V rated value	42 kA
• at 690 V rated value	4 kA
at 690 V rated value response value current of instantaneous short-circuit trip unit	4 kA
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings	4 kA
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor	4 kA 130 A
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings	4 kA 130 A
 at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value 	4 kA 130 A
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp]	4 kA 130 A
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor	4 kA 130 A 10 A 10 A
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor at 110/120 V rated value	4 kA 130 A 10 A 10 A 0.5 hp
at 690 V rated value response value current of instantaneous short-circuit trip unit UL/CSA ratings full-load current (FLA) for 3-phase AC motor at 480 V rated value at 600 V rated value yielded mechanical performance [hp] for single-phase AC motor	4 kA 130 A 10 A 10 A

- at 200/208 V rated value 2 hp 3 hp - at 220/230 V rated value 5 hp - at 460/480 V rated value 5 hp - at 460/480 V rated value 5 hp - at 575/600 V rated value 5 hp - contact rating of auxiliary contacts according to UL 5000 / R300 Product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V gL/gG 50 A gL/gG 40 A
- at 460/480 V rated value 10 hp 10
- at 575/600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link • for short-circuit protection of the auxiliary switch required design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method according to DIN EN 60715 height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for grounded parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwar
contact rating of auxiliary contacts according to UL Short-circuit protection product function short circuit protection design of the short-circuit trip design of the fuse link
Short-circuit protection Product function short circuit protection design of the short-circuit trip magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link
design of the short-circuit trip design of the fuse link for short-circuit protection of the auxiliary switch required fix < 400 A) for short-circuit protection of the main circuit fix < 400 A) fix < 400 A fix
design of the fuse link • for short-circuit protection of the auxiliary switch required design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method according to DIN EN 60715 height • for grounded parts at 400 V — downwards — at the side • for grounded parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — up
• for short-circuit protection of the auxiliary switch required design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method according to DIN EN 60715 height • for grounded parts at 400 V — downwards — at the side • for grounded parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — ownwards — upwards
required Ik < 400 Å
protection of the main circuit • at 400 V • at 500 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method according to DIN EN 60715 height 97 mm width 45 mm depth required spacing • for grounded parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — upwards — upwards — upwards — 30 mm
at 500 V at 690 V gL/gG 40 A gL/gG 40 A gL/gG 40 A gL/gG 40 A Installation/ mounting/ dimensions mounting position fastening method according to DIN EN 60715 height yor mm width 45 mm depth 97 mm required spacing at for grounded parts at 400 V at the side for live parts at 400 V adownwards author for grounded parts at 500 V author for grounded parts at 500
at 690 V Installation/ mounting/ dimensions mounting position fastening method screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 height 97 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V - downwards - upwards - upwards - at the side • for grounded parts at 500 V - downwards - at the side • for grounded parts at 500 V - downwards - upwards - upwards - upwards - at the side • for grounded parts at 500 V - downwards - upwards - upwards - upwards - upwards - upwards - at many standard mounting rail according to DIN EN 60715 - mm - at m
Installation/ mounting/ dimensions mounting position fastening method screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 height 97 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V - downwards - upwards - at the side • for live parts at 400 V - downwards - upwards - at the side • for grounded parts at 500 V - downwards - at the side • for grounded parts at 500 V - downwards - at the side • for grounded parts at 500 V - downwards - upwards - at the side • for grounded parts at 500 V - downwards - upwards - upw
mounting position fastening method screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 height 97 mm width 45 mm depth required spacing • for grounded parts at 400 V — downwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at waste of the side • for grounded parts at 500 V — downwards — upwards — upwards — at me side • for grounded parts at 500 V — downwards — upwards — upw
fastening method screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 height 97 mm width 45 mm depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards • for grounded parts at 500 V — downwards — upwards — upwards 30 mm 30 mm
height 97 mm width 45 mm depth 97 mm required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — of r live parts at 400 V — downwards — upwards — upwards — upwards — upwards — of r grounded parts at 500 V — downwards — of or grounded parts at 500 V — downwards — upwards • for grounded parts at 500 V — downwards — upwards 30 mm • for grounded parts at 500 V — downwards — upwards 30 mm
width 45 mm depth 97 mm required spacing 97 mm • for grounded parts at 400 V 30 mm — upwards 30 mm — at the side 9 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm
depth 97 mm required spacing 9 for grounded parts at 400 V — downwards 30 mm — upwards 30 mm — at the side 9 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm
required spacing ● for grounded parts at 400 V — downwards 30 mm — upwards 9 mm — at the side 9 mm ● for live parts at 400 V — downwards 30 mm — upwards 30 mm — upwards 30 mm — upwards 9 mm ● for grounded parts at 500 V — downwards 30 mm — at the side 9 mm
required spacing ● for grounded parts at 400 V — downwards 30 mm — upwards 9 mm — at the side 9 mm ● for live parts at 400 V — downwards 30 mm — upwards 30 mm — upwards 30 mm — upwards 9 mm ● for grounded parts at 500 V — downwards 30 mm — at the side 9 mm
 for grounded parts at 400 V — downwards — upwards — at the side 9 mm for live parts at 400 V — downwards — upwards — at the side 9 mm for grounded parts at 500 V — downwards — upwards 9 mm for grounded parts at 500 V — downwards — upwards 30 mm 30 mm 30 mm 30 mm 30 mm 30 mm
— downwards 30 mm — upwards 30 mm — at the side 9 mm • for live parts at 400 V 30 mm — downwards 30 mm — at the side 9 mm • for grounded parts at 500 V 9 mm — downwards 30 mm — upwards 30 mm
 — at the side ● for live parts at 400 V — downwards — upwards — at the side ● for grounded parts at 500 V — downwards — upwards 30 mm 9 mm 10 mm 11 mm 12 mm 13 mm 14 mm 15 mm 16 mm 17 mm 18 mm 19 mm 10 mm<!--</td-->
 for live parts at 400 V downwards upwards at the side for grounded parts at 500 V downwards upwards 30 mm 9 mm for grounded parts at 500 V upwards 30 mm 30 mm
— downwards 30 mm — upwards 30 mm — at the side 9 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm
— downwards 30 mm — upwards 30 mm — at the side 9 mm • for grounded parts at 500 V 30 mm — downwards 30 mm — upwards 30 mm
 — upwards — at the side 9 mm • for grounded parts at 500 V — downwards — upwards 30 mm 30 mm
 — at the side ● for grounded parts at 500 V — downwards — upwards 30 mm 30 mm
 for grounded parts at 500 V — downwards — upwards 30 mm 30 mm
downwardsupwards30 mm30 mm
— upwards 30 mm
at the side
• for live parts at 500 V
— downwards 30 mm
— upwards— at the side30 mm9 mm
• for grounded parts at 690 V
— downwards 50 mm
— upwards 50 mm
— backwards 0 mm
— at the side 30 mm
— forwards 0 mm
• for live parts at 690 V
— downwards 50 mm
— upwards 50 mm
— backwards 0 mm
— at the side 30 mm
— forwards 0 mm
Connections/ Terminals
type of electrical connection
• for main current circuit screw-type terminals
• for auxiliary and control circuit screw-type terminals
arrangement of electrical connectors for main current circuit Top and bottom
type of connectable conductor cross-sections
• for main contacts
— solid or stranded 2x (0,75 2,5 mm²), 2x 4 mm²

 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
at AWG cables for main contacts	2x (18 14), 2x 12
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid or stranded	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG cables for auxiliary contacts 	2x (20 16), 2x (18 14)
tightening torque	
 for main contacts with screw-type terminals 	0.8 1.2 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
 for main contacts 	M3
 of the auxiliary and control contacts 	M3
Safety related data	
B10 value	
 with high demand rate according to SN 31920 	5 000
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %
 with high demand rate according to SN 31920 	50 %
failure rate [FIT]	
 with low demand rate according to SN 31920 	50 FIT
T1 value for proof test interval or service life according to IEC 61508	10 y
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
display version for switching status	Handle
Certificates/ approvals	

General Product Approval



Confirmation





<u>KC</u>



For use in hazardous locations

Declaration of Conformity

Test Certificates







Type Test Certificates/Test Report

Special Test Certificate

Marine / Shipping













Marine / Shipping

other

Railway



Confirmation



Confirmation

Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-1JA15

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-1JA15

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1JA15


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax de.aspx?mlfb=3RV2011-1JA15&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-1JA15/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-1JA15&objecttype=14&gridview=view1

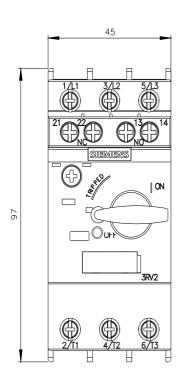

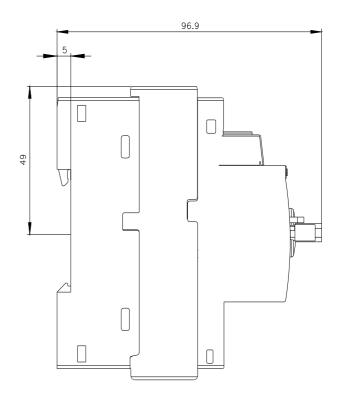

last modified:

6/25/2022