

DESCRIPTION

The SD 012-151-011 is a high sensitivity, low noise, 0.3 mm diameter active area InGaAs photodiode (chip dimensions 0.44mm x 0.44mm) for detection at SWIR, NIR wavelengths for imaging and sensing applications. The photodiode is assembled in a TO-46 package.

FEATURES

- Low Noise,
- High Sensitivity
- Detection at SWIR and NIR

RELIABILITY

This API high-reliability detector is in principle able to meet military test requirements (Mil-STD-750, Mil-STD-883) after proper screening and group test. Contact API for recommendations on specific test conditions and procedures.

APPLICATIONS

- Industrial Sensing
- Security and Defense
- Communication
- Medical

ABSOLUTE MAXIMUM RATINGS

$T_a = 23^\circ\text{C}$ non condensing 1/16 inch from case for 3 seconds max

SYMBOL	MIN	MAX	UNITS
Reverse Voltage	-	40	V
Operating Temperature	-40	+100	$^\circ\text{C}$
Storage Temperature	-55	+125	$^\circ\text{C}$
Soldering Temperature	-	+260	$^\circ\text{C}$

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.


ELECTRO-OPTICAL CHARACTERISTICS RATINGS

T_a = 23°C unless noted otherwise


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Breakdown Voltage	I _{bias} = 1 μA	-	50	-	V
Responsivity	λ = 1310 nm, V _r = 5V	0.80	0.90	-	A/W
Shunt Resistance	V _{bias} = 10 mV	0.2	1.0	-	GΩ
Dark Current	V _{bias} = 5V	-	0.1	10.0	nA
Capacitance	V _{bias} = 5V; f = 1.0 MHz	-	2.0	10.0	pF
Rise Time (50Ω load)	V _{bias} = 5V; λ = 1310 nm	-	1.2	-	ns
Spectral Range	-	800	-	1700	nm
Noise Equivalent Power	V _r = 5V @ λ = 1310	-	4.0x10 ⁻¹⁵	-	W/Hz ^{1/2}

TYPICAL PERFORMANCE


NOISE CURRENT vs. REVERSE BIAS

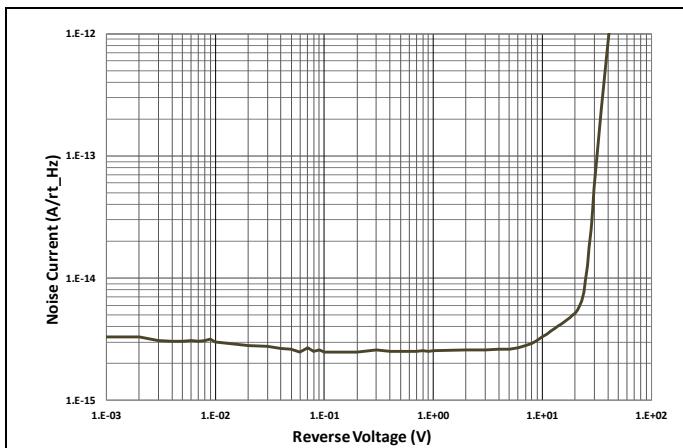


DARK CURRENT vs. REVERSE BIAS

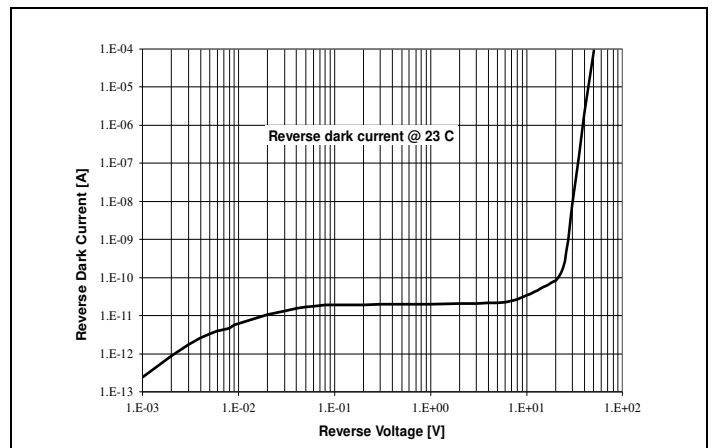

SPECTRAL RESPONSE

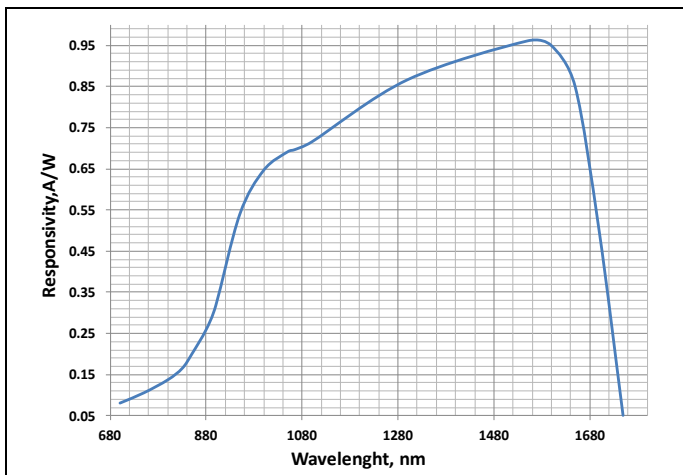

CAPACITANCE vs. REVERSE BIAS

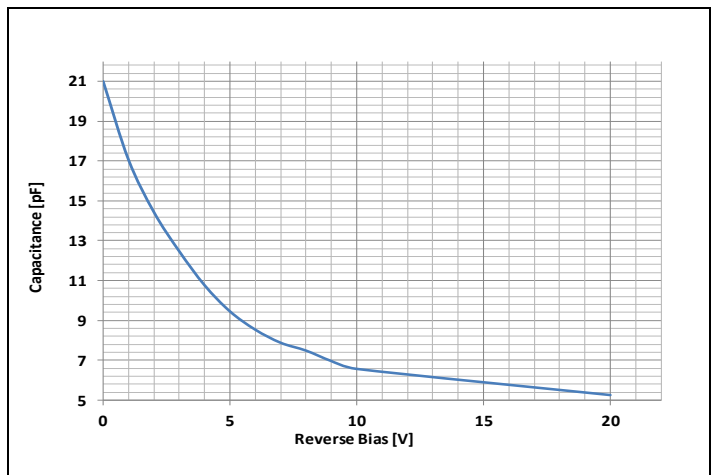

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.