




# › Logic Controller Millenium Slim

- › A logic controller in a 17.5 mm (0.69") width
- › DIN rail mount and panel mount
- › 8 I/Os: 4 digital inputs (convertibles to analog in DC versions) and 4 digital outputs (relay or static)
- › Highspeed & PWM inputs available in DC versions, PWM outputs available in static versions
- › DC (24V) and AC (110-240V) power supply available
- › Removable connectors
- › Wireless Bluetooth to communicate with other MilleniumSlim logic controllers, retrieve datalog and program transfer
- › Virtual display possible in mobile devices trough Crouzet app
- › Intuitive & easy-to-use graphical programming software (FBD)
- › Certified CE, cULus Listed, NOM, RCM, SCM, UKCA



Millenium Slim

Product Selection								
Type	Total I/Os	Input	Output	Supply Voltage	Communication	Screen	Connectors	Part Number
CB8R (AC)	8	4 Inputs › 4 x Digital	4 Outputs › 4 x 6 A Relay	110-240 V~	Bluetooth Embedded	Via App: Crouzet Virtual Display	Included	88983903
CB8R (DC)		4 Inputs › 2 x Convertibles to	4 Outputs › 4 x 6 A Relay	24 V=				88983901
CB8S (DC)		<ul style="list-style-type: none"> <li>▪ Digital</li> <li>▪ Analog</li> <li>▪ High-Speed</li> </ul> › 2 x Convertibles to <ul style="list-style-type: none"> <li>▪ Digital</li> <li>▪ Analog</li> <li>▪ PWM</li> </ul>	4 Outputs › 4 x 0.5 A Static (Transistor - Sourcing)					88983902

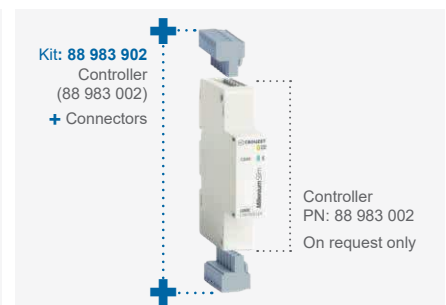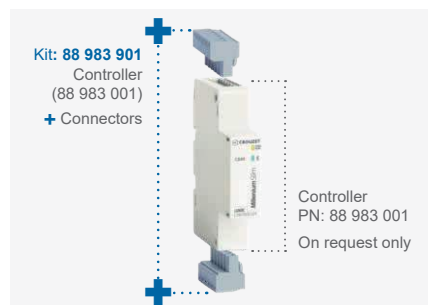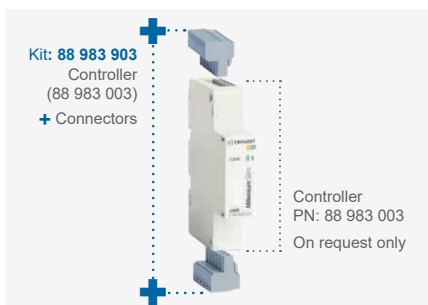

You have a project? Contact us on [www.crouzet.com](http://www.crouzet.com)

**Description:**

**Millenium Slim: The smallest logic controller ever!**

Designed for **space reduction** in any control panel or machine thanks to its 17.5 mm (0.69") body, this multipurpose industrial logic controller with 8 highly configurable I/Os, can replace dozens of control panel products, and will give **wireless capabilities** to your applications via Bluetooth. Powered by the **easiest-to-use** and free programming software "CrouzetSoft", a virtual display from any smartphone or PC, remote program transferring and plenty of pre-programmed applications ready to quick-start your next small-scale automation project.

For more information about **Millenium Slim**, please visit [www.crouzet.com](http://www.crouzet.com).

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>General Characteristics</b>			
<b>Part Number</b>	<b>88983903</b>	<b>88983901</b>	<b>88983902</b>
Safety certifications	CE, cULus Listed, NOM, RCM, SCM, UKCA		
Environmental certifications	Reach, RoHS		
Conformity with programmable controllers' standard	CEI/EN 61131-2 (Open equipment)		
Conformity with the RADIO directive (in accordance with 2014/53/UE)	<ul style="list-style-type: none"> <li>▪ EN 61010-1 &amp; EN 61010-2-201: Safety requirements</li> <li>▪ EN 301489-1 &amp; EN 301489-17: EMC requirements</li> <li>▪ EN 61000-6-1, EN 61000-6-2, EN 61000-6-3 &amp; EN 61000-6-4: EMC requirements</li> <li>▪ EN 300328: Radio requirements</li> <li>▪ EN62311: Health requirements</li> </ul>		
Power supply earthing	None		
Overvoltage category	II (in accordance with IEC/EN 60664-1)		
Pollution Degree	2 (in accordance with IEC/EN 61131-2)		
Maximum utilization altitude	<ul style="list-style-type: none"> <li>▪ Operation: 2000 m</li> <li>▪ Transport: 3000 m</li> </ul>		
Mechanical resistance	<ul style="list-style-type: none"> <li>▪ Immunity to vibrations IEC/EN 60068-2-6, Fc test</li> <li>▪ Immunity to shock IEC/EN 60068-2-27, Ea test</li> <li>▪ Degrees of protection provided by enclosures of electrical equipment against external mechanical impacts CEI62262: IK07 (test method: 500G steel ball drop, 40cm high)</li> </ul>		
Resistance to electrostatic discharge	Immunity to ESD IEC/EN 61000-4-2, level 3		
Resistance to HF interference (Immunity)	<ul style="list-style-type: none"> <li>▪ Immunity to radiated electrostatic fields IEC/EN 61000-4-3, level 3</li> <li>▪ Immunity to fast transients (burst immunity) IEC/EN 61000-4-4, level 3</li> <li>▪ Immunity to shock waves IEC/EN 61000-4-5</li> <li>▪ Radio frequency in common mode IEC/EN 61000-4-6, level 3</li> </ul>		
Conducted and radiated emissions (in accordance with EN 55032)	Class B		
Bluetooth protocol	Bluetooth ≥ V5.0		
Bluetooth range	≤ 10 m (max. 20 m in free fields)		
Operating temperature	Ventilated enclosure: -20 °C (-4 °F) to +60 °C (140 °F) Non-ventilated enclosure: -20 °C (-4 °F) to +40 °C (104 °F) UL: maximum surrounding air: +50 °C (122 °F)		
Storage temperature	-40 °C (-40 °F) to +80 °C (176 °F)		
Humidity	95% max. (no condensation or dripping water)		
Connecting capacity	<ul style="list-style-type: none"> <li>▪ Flexible wire with ferrule: 1 conductor: 0.25 to 2.5 mm<sup>2</sup></li> <li>▪ Flexible wire with ferrule: 2 conductors: 0.25 to 1 mm<sup>2</sup> (1.5 mm<sup>2</sup> with ferrule TWIN)</li> <li>▪ Rigid wire: 1 conductor: 0.2 to 2.5 mm<sup>2</sup></li> <li>▪ Rigid wire: 2 conductors: 0.2 to 1 mm<sup>2</sup></li> <li>▪ Tightening torque: 0.5 N.m (4.5 lb-in) (screw M3, tighten using a flat screwdriver)</li> <li>▪ Stripping length: 7 mm</li> </ul>		
Housing material	Makrolon, UL94V0		
Housing Color	Light Gray RAL 7035		
Degree of protection	<ul style="list-style-type: none"> <li>▪ IP 40 on front panel</li> <li>▪ IP 20 excluding terminal blocks</li> </ul>		
Weight	<ul style="list-style-type: none"> <li>▪ Without packing: 103g (88983903), 97g (88983901), 79g (88983902)</li> <li>▪ With unitary packing: 119g (88983903), 113g (88983901), 95g (88983902)</li> </ul>		
Dimensions	<ul style="list-style-type: none"> <li>▪ Without packing: 18 x 90 x 69.6 mm (excluding terminal blocks and DIN rail clip)</li> <li>▪ With unitary packing: 22 x 137 x 74 mm</li> </ul>		
Connectors Type	Removable Connectors with compatibility for Screw connectors or Cage Clamp connectors (see installation sheet for compatible connectors recommended)		
DIN rail mounting	Mounting in 35 mm symmetrical DIN rail (see installation sheet of instructions), compatible with modular enclosures		
Panel mounting	Flat panel mounting by screws (see installation sheet of instructions)		

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>Processing Characteristics</b>			
<b>Part Number</b>	<b>88983903</b>	<b>88983901</b>	<b>88983902</b>
HMI / MMI	<ul style="list-style-type: none"> <li>1 green Led for Power/Status</li> <li>1 blue Led for Bluetooth</li> <li>Virtual display &amp; keypad with Crouzet Virtual Display or Crouzet Soft</li> </ul>		
Programming Software	Crouzet Soft		
Programming method	FBD (Function Block Diagram), including SFC (Sequential Function Chart) (Grafcet)		
Program size	<ul style="list-style-type: none"> <li>Function blocks: typically 350 blocks (1024 max.)</li> <li>Macro blocks: 127 max. (255 blocks per macro)</li> </ul>		
Program memory	Flash		
Data memory	2 k octets		
Back-up time (in the event of power failure)	<ul style="list-style-type: none"> <li>Program and settings in the controller: 10 years</li> <li>Data memory: 10 years</li> </ul>		
Data back-up	Data backup in the flash memory is guaranteed if the product is powered on more than 10 seconds		
Cycle time	From 2 ms* to 90 ms, default value: 10 ms *: Depending on program memory		
Clock data retention	10 years (lithium battery) at 25 °C (77 °F)		
Clock drift	Drift < 12 min/year (at 25 °C (77 °F)) 6 s / month (at 25 °C (77 °F) with user-definable correction of drift).		
Timer block accuracy	0.5 % ± 2 cycle time		
Startup time on power up	< 3 s		
Self-test	<ul style="list-style-type: none"> <li>Test firmware integrity (checksum memory)</li> <li>Stability of the internal power supply</li> <li>Check the conformity of the device configuration with the configuration in the application program.</li> </ul>		

<b>Power Supply</b>			
<b>Part Number</b>	<b>88983903</b>	<b>88983901</b>	<b>88983902</b>
Nominal supply voltage	110 V~ → 240 V~	24 V---	
Voltage supply tolerance	-15% / +10%	-15% / +20%	
Operating limits	93.5 → 264 V~ * Accepts temporary overvoltage occurring on the power network	20.4 → 28.8 V---	* Accepts temporary overvoltage occurring on the power network
AC supply voltage frequency	50/60Hz (-6% / +5%) so 47Hz → 53Hz / 57 → 63Hz	N/A	
Immunity to power micro cuts	≤ 10 ms (repetition 20 times)	≤ 1 ms (repetition 20 times)	
Max. absorbed power	<ul style="list-style-type: none"> <li>6.9 VA @ 240 V~</li> <li>6 VA @ 240 V~ I/Os = 0</li> </ul>	<ul style="list-style-type: none"> <li>1.2 W @ 24 V---</li> <li>1.56 W @ 28.8 V---</li> <li>0.5 W @ 24 V--- I/Os = 0</li> </ul>	<ul style="list-style-type: none"> <li>0.75 W @ 24 V---</li> <li>0.8 W @ 28.8 V---</li> <li>0.5 W @ 24 V--- I/Os = 0</li> </ul>
Protection against polarity inversions	Not applicable	Yes	
Power monitoring	Yes, but no value available through the application "FB Status"	Yes, and value available through the application "FB Status", 1/10V, 5% of full scale	

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>Inputs</b>			
Part Number	88983903	88983901	88983902
<b>Used as Digital Inputs</b>			
Quantity	4 digital inputs -> from I1 to I4		
Rated voltage	110 V $\sim$ → 240 V $\sim$	24 V $\text{---}$	
Voltage tolerance	-15% / +10%	-15% / +20%	
Operating limits	93.5 → 264 V $\sim$	20.4 → 28.8 V $\text{---}$	
Input current	<ul style="list-style-type: none"> <li>▪ 0.25 mA @ 93.5 V<math>\sim</math></li> <li>▪ 0.3 mA @ 110 V<math>\sim</math></li> <li>▪ 0.6 mA @ 230 V<math>\sim</math></li> <li>▪ 0.7 mA @ 265 V<math>\sim</math></li> </ul>	<ul style="list-style-type: none"> <li>▪ 1.8 mA @ 20.4 V</li> <li>▪ 2.1 mA @ 24 V</li> <li>▪ 2.5 mA @ 28.8 V</li> </ul>	
Input frequency	50/60Hz (-6% / +5%) so 47% → 53Hz / 57 → 63Hz	N/A	
Input impedance	559 k $\Omega$	11.7 k $\Omega$	
Logic 1 voltage threshold	≥ 79 V $\sim$	≥ 11 V $\text{---}$	
Making current at logic state 1	≥ 0.2 mA	≥ 1 mA	
Logic 0 voltage threshold	≤ 45 V $\sim$	≤ 9 V $\text{---}$	
Release current at logic state 0	≤ 0.1 mA	≤ 0.8 mA	
Response time	1 to 2 cycle times		
Sensor type	Contact or 3-wire PNP		
Conforming to IEC/EN 61131-2	Type 1		
Input type	Resistive		
Isolation between power supply and inputs	None		
Isolation between inputs	None		
Protection against polarity inversions	Not applicable	Yes	
Status indicator	Yes, on Virtual Display (CVD & Crouzet Soft)		
Cable length	≤ 30 m		
<b>Used as High-Speed Inputs</b>			
Quantity	N/A	2 High-Speed inputs -> from I1 to I2	
Input voltage	N/A	24 V $\text{---}$	
Voltage tolerance	N/A	-5% / +20%	
Operating limits	N/A	22.8 → 28.8 V $\text{---}$	
Input current	N/A	<ul style="list-style-type: none"> <li>▪ 1.9 mA @ 22.8 V</li> <li>▪ 2.1 mA @ 24 V</li> <li>▪ 2.5 mA @ 28.8 V</li> </ul>	
Input impedance	N/A	11.7 k $\Omega$	
Logic 1 voltage threshold	N/A	≥ 22.8 V $\text{---}$	
Making current at logic state 1	N/A	≥ 1.9 mA	
Logic 0 voltage threshold	N/A	≤ 12 V $\text{---}$	
Release current at logic state 0	N/A	≤ 1 mA	
Maximum counting frequency	N/A	<ul style="list-style-type: none"> <li>▪ 2 independent counters: 5 kHz*</li> <li>▪ Function: UP and DOWN</li> </ul> <p>* with a time cycle ≤ 10 ms and a ton / toff = 50% ± 5%, level 0 &lt; 12V and level 1 &gt; 22.8V</p>	
Cable length	N/A	≤ 3 m with shielded twisted cable	

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>Used as PWM Inputs</b>			
Quantity	N/A	2 PWM inputs -> from I3 to I4	
Input voltage	N/A	24 V $\overline{\text{---}}$	
Voltage tolerance	N/A	-5% / +20%	
Operating limits	N/A	22.8 $\rightarrow$ 28.8 V $\overline{\text{---}}$	
Input current	N/A	<ul style="list-style-type: none"> <li>▪ 1.9 mA @ 22.8 V</li> <li>▪ 2.1 mA @ 24 V</li> <li>▪ 2.5 mA @ 28.8 V</li> </ul>	
Input impedance	N/A	11.7 k $\Omega$	
Logic 1 voltage threshold	N/A	$\geq$ 22.8 V $\overline{\text{---}}$	
Making current at logic state 1	N/A	$\geq$ 1.9 mA	
Logic 0 voltage threshold	N/A	$\leq$ 12 V $\overline{\text{---}}$	
Release current at logic state 0	N/A	$\leq$ 1 mA	
Input frequency	N/A	from 10 Hz to 1 KHz	
Restitution	N/A	0 to 100% duty cycle reading	
Accuracy	N/A	5% with duty cycle between 10% and 90%	
Cable length	N/A	$\leq$ 30 m	


<b>Used as Analog Inputs</b>			
Quantity	N/A	4 analog inputs -> from I1 to I4	
Measuring range	N/A	<ul style="list-style-type: none"> <li>▪ 0 <math>\rightarrow</math> 10 V</li> <li>▪ 0 <math>\rightarrow</math> V power supply or Voltmeter</li> </ul>	
Input impedance	N/A	11.7 k $\Omega$	
Maximum value without destruction	N/A	<ul style="list-style-type: none"> <li>▪ 28.8 V<math>\overline{\text{---}}</math> max for 0 <math>\rightarrow</math> 10 V and 0 <math>\rightarrow</math> V power supply</li> <li>▪ 30.5 V<math>\overline{\text{---}}</math> max for Voltmeter</li> </ul>	
Input type	N/A	Common mode	
Resolution	N/A	12 bits at maximum input voltage (10 bits at 10V)	
Value of LSB	N/A	7.03 mV	
Conversion time	N/A	Controller cycle time	
Maximum error in 0-10V mode	N/A	<ul style="list-style-type: none"> <li>▪ <math>\pm</math> 3.5 % of full scale at 25 °C (77 °F)</li> <li>▪ <math>\pm</math> 5 % of full scale at 55 °C (131 °F)</li> </ul>	
Maximum error in 0-V power supply mode	N/A	<ul style="list-style-type: none"> <li>▪ <math>\pm</math> 5 % of full scale at 25 °C (77 °F)</li> <li>▪ <math>\pm</math> 6.2 % of full scale at 55 °C (131 °F)</li> </ul>	
Repeat accuracy at 55 °C (131 °F)	N/A	$\pm$ 2 %	
Voltmeter	N/A	from 0 to 30.5 V Accuracy: $\pm$ 5% of full scale at 25 °C (77 °F) $\pm$ 6.2 % of full scale at 55 °C (131 °F)	
Isolation between analogue channel and power supply	N/A	None	
Protection against polarity inversions	N/A	Yes	
Potentiometer control	N/A	2.2 k $\Omega$ / 0.5 W (recommended), 10 K $\Omega$ max.	
Cable length	N/A	$\leq$ 10 m with shielded twisted cable (sensor not isolated)	

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>Outputs</b>			
Part Number	88983903	88983901	88983902
<b>Relay Outputs</b>			
Quantity	4 relay outputs, from O1 to O4		N/A
Breaking voltage	<ul style="list-style-type: none"> <li>▪ 30 V<math>\overline{\text{---}}</math> max</li> <li>▪ 250 V<math>\sim</math> max</li> </ul>		N/A
Breaking current in the outputs	<ul style="list-style-type: none"> <li>▪ @ 25 °C -&gt; O1, O2, O3, &amp; O4: 6A max</li> <li>▪ @ 40 °C -&gt; O1, O2, O3, &amp; O4: 4A max</li> <li>▪ @ 55 °C -&gt; O1, O2, O3, &amp; O4: 2A max</li> <li>▪ @ 60 °C -&gt; O1, O2, O3, &amp; O4: 1.3A max</li> </ul>		N/A
Breaking current in the common	<ul style="list-style-type: none"> <li>▪ @ 25 °C -&gt; C1: 10A max &amp; C2: 8A max</li> <li>▪ @ 40 °C -&gt; C1 &amp; C2: 8A max</li> <li>▪ @ 55 °C -&gt; C1 &amp; C2: 4A max</li> <li>▪ @ 60 °C -&gt; C1 &amp; C2: 2.6A max</li> </ul>		N/A
Mechanical life	10 000 000 operations (cycles)		N/A
Electrical durability	100 000 operations (cycles) resistive loads, @ 25 °C		N/A
Electrical durability for 100 000 operating cycles	Resistive <ul style="list-style-type: none"> <li>▪ 24 V<math>\overline{\text{---}}</math> tau = 0 ms: 6 A (UL/CUL: 5A)</li> <li>▪ 250 V<math>\sim</math> cos phi = 1: 6 A</li> </ul> Inductive <ul style="list-style-type: none"> <li>▪ 1/4 HP 250 V<math>\sim</math> @ 25 °C</li> </ul>		N/A
Minimum switching capacity	100 mA (at minimum voltage of 12V)		N/A
Maximum operating rate	360 per hour		N/A
Response time	<ul style="list-style-type: none"> <li>▪ Make = 1 cycle time + 8 ms max</li> <li>▪ Release = 1 cycle time + 5 ms max</li> </ul>		N/A
Isolation between power supply and outputs	Reinforced insulation		N/A
Isolation between outputs	Simple isolation between block C1 / O1 / O2 and C2 / O3 / O4		N/A
Built-in protections	<ul style="list-style-type: none"> <li>▪ Against short-circuits: None</li> <li>▪ Against over voltages and overload: None</li> </ul>		N/A
Status indicator	Yes, on Virtual Display (CVD & Crouzet Soft)		N/A
Cable length	≤ 30 m		N/A
<b>Static (Transistor) Outputs</b>			
Quantity	N/A	4 static outputs -> from O1 to O4	
Breaking voltage	N/A	10 → 28.8 V $\overline{\text{---}}$	
Nominal voltage	N/A	12 / 24 V $\overline{\text{---}}$	
Nominal breaking current	N/A	0.5 A	
Maximum breaking current	N/A	0.7 A	
Breaking current in the common	N/A	2.8 A	
Voltage drop	N/A	< 2V for I=0.5A	
Min. load	N/A	1 mA	
Response time	N/A	<ul style="list-style-type: none"> <li>▪ Make = 1 cycle time + 60 μs max</li> <li>▪ Release = 1 cycle time + 60 μs max</li> </ul>	
Built-in protections	N/A	<ul style="list-style-type: none"> <li>▪ Against overloads and short-circuits: Yes</li> <li>▪ Against over voltages (*): Yes (* In the absence of a volt-free contact between the output of the logic controller and the load)</li> <li>▪ Against inversions of power supply: Yes</li> <li>▪ Current limitation (min: 1.1A, max: 2.6A, @VCC: 24 V<math>\overline{\text{---}}</math>, Rload &lt; 10mOhms)</li> </ul>	

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
Isolation between power supply and outputs	N/A		None
Isolation between outputs	N/A		None
Wiring	N/A		PNP (Load Common at 0V)
Status indicator	N/A		Yes, on Virtual Display (CVD & Crouzet Soft)
Cable length	N/A		≤ 10 m

Static PWM Outputs			
Quantity	N/A		4 static outputs -> from O1 to O4
PWM frequency	N/A		20 Hz to 1500 Hz
PWM duty cycle	N/A		0 → 100 %
PWM Max. error	N/A		< 2% (de 10% à 90%)
Built-in protections	N/A		<ul style="list-style-type: none"> <li>▪ Against overloads and short-circuits: Yes</li> <li>▪ Against over voltages (*): Yes (* In the absence of a volt-free contact between the output of the logic controller and the load</li> <li>▪ Against inversions of power supply: Yes</li> <li>▪ Current limitation (min: 1.1A, max: 2.6A, @VCC: 24 V<sub>DC</sub>, Rload &lt; 10mOhms)</li> </ul>
Cable length	N/A		≤ 10 m

	Millenium Slim CB8R (AC)	Millenium Slim CB8R (DC)	Millenium Slim CB8S (DC)
<b>Product Dimensions</b>			
<b>Side and Front Dimensions</b>			
Dimensions valid for: 88983903 - 88983901 - 88983902			

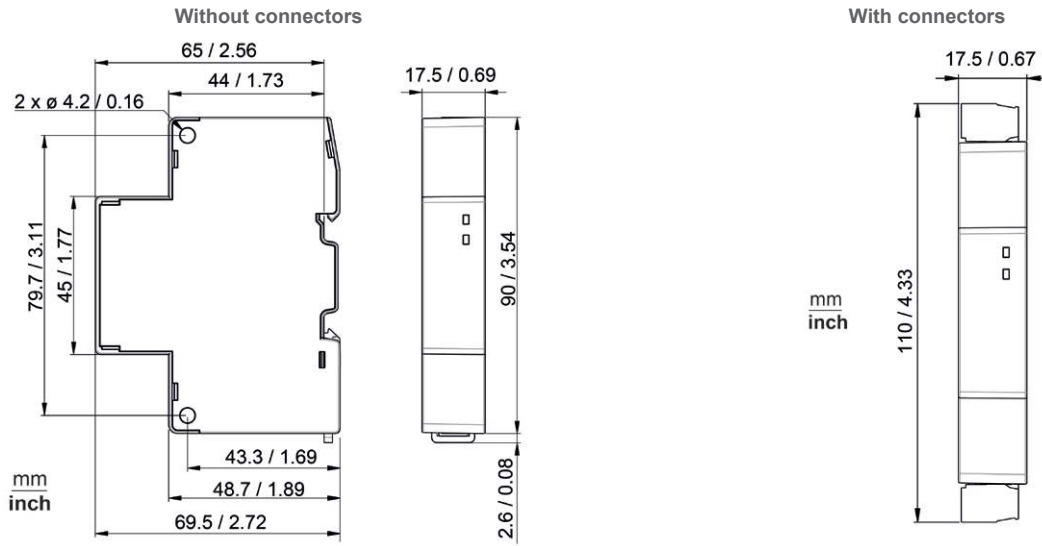


**Electronic & Wiring Diagrams**

**Inputs**


**Digital Inputs (AC Voltage)**

Millenium Slim - Type CB8R AC - 88983903 → Inputs I1, I2, I3 and I4

**Electronic Diagram**

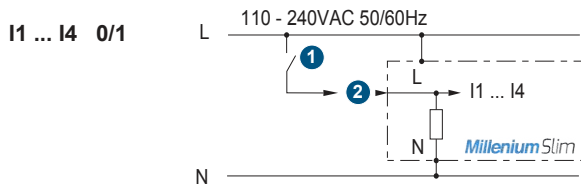

**Wiring Diagram**

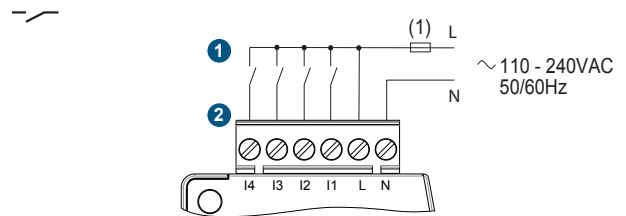

- ① Contact
- ② Digital Input

(1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)  
 L: Line  
 N: Neutral

I1.. I4: Inputs I1, I2, I3 and I4



**Inputs**


**Digital Inputs (DC Voltage)**

Millenium Slim - Type CB8R DC - 88983901 → Inputs I1, I2, I3 and I4


Millenium Slim - Type CB8S DC - 88983902 → Inputs I1, I2, I3 and I4

**Electronic Diagram**

I1 ... I4 0/1

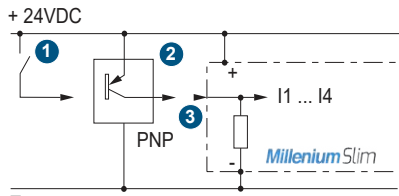

**Wiring Diagram**

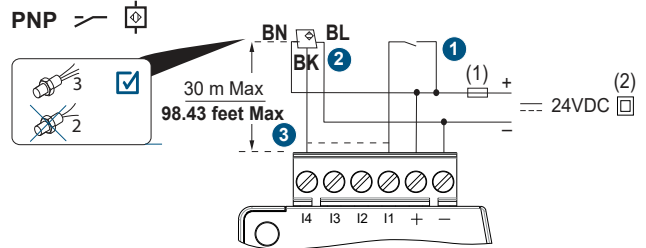

- 1 Contact
- 2 3-wire PNP sensor
- 3 Digital Input

I1.. I4: Inputs I1, I2, I3 and I4

- (1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)
- (2) Isolating source
- BN: Brown cable of the 3-Wire PNP sensor
- BL: Blue cable of the 3-Wire PNP sensor
- BK: Black cable of the 3-Wire PNP sensor

**Inputs**

**High-Speed Inputs (Wiring of 3-wire PNP sensors)**


Millenium Slim - Type CB8R DC - 88983901 → Inputs I1 and I2

Millenium Slim - Type CB8S DC - 88983902 → Inputs I1 and I2


**Electronic Diagram**

I1, I2

**HIGH SPEED**

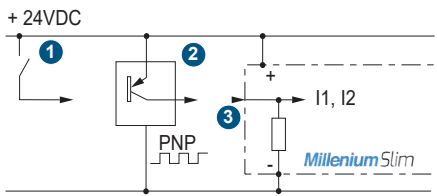

**Wiring Diagram**

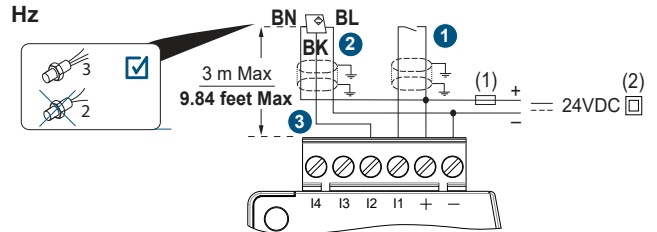

- 1 Contact
- 2 3-wire PNP sensor
- 3 Digital Input

I1, I2: Inputs I1 and I2


- (1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)
- (2) Isolating source
- BN: Brown cable of the 3-Wire PNP sensor
- BL: Blue cable of the 3-Wire PNP sensor
- BK: Black cable of the 3-Wire PNP sensor

**Inputs**

**High-Speed Inputs (Wiring of Encoders)**

Millenium Slim - Type CB8R DC - 88983901 → Inputs I1 and I2  
 Millenium Slim - Type CB8S DC - 88983902 → Inputs I1 and I2


**Electronic Diagram**

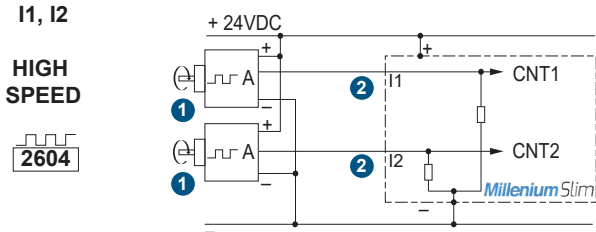

- 1 Encoder
- 2 High-Speed Input

I1, I2: Inputs I1 and I2

**Wiring Diagram**

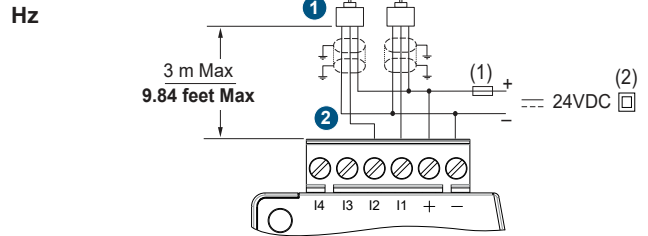


- (1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)
- (2) Isolating source

**Inputs**

**PWM Inputs**

Millenium Slim - Type CB8R DC - 88983901 → Inputs I3 and I4  
 Millenium Slim - Type CB8S DC - 88983902 → Inputs I3 and I4


**Electronic Diagram**

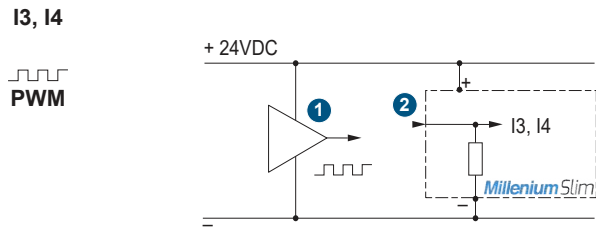

- 1 PWM Source
- 2 PWM Inputs

I3, I4: Inputs I3 and I4

**Wiring Diagram**

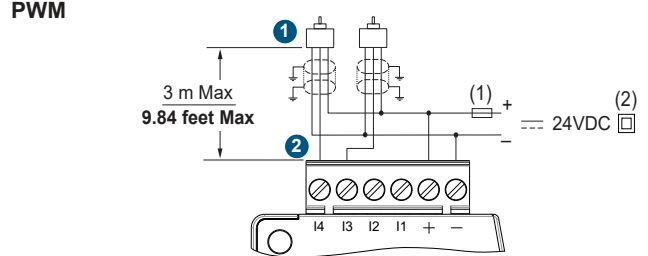

- (1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)
- (2) Isolating source

**Inputs**


**Analog Inputs**

Millenium Slim - Type CB8R DC - 88983901 → Inputs I1, I2, I3 and I4

Millenium Slim - Type CB8S DC - 88983902 → Inputs I1, I2, I3 and I4


**Electronic Diagram**

**I1 ... I4 U**

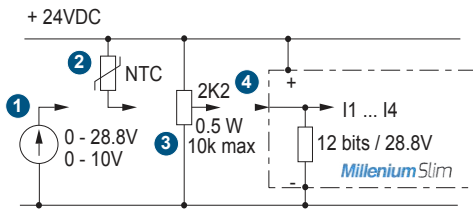

**Wiring Diagram**

**28.8 V, NTC, R**

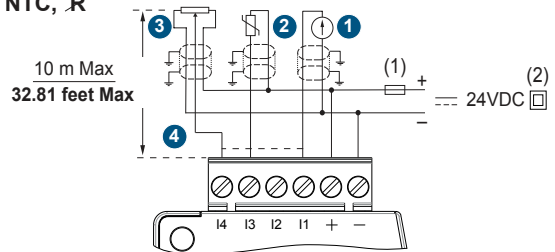

- 1 0-10 V
- 2 NTC Probe
- 3 Potentiometer
- 4 Analog Input

- (1) 1A (UL248) quick blowing fuse, circuit breaker, or circuit protector (US)
- (2) Isolating source

I1... I4: Inputs I1, I2, I3 and I4

**Outputs**


**Relay Outputs**

Millenium Slim - Type CB8R AC - 88983903 → Outputs O1, O2, O3 and O4

Millenium Slim - Type CB8R DC - 88983901 → Outputs O1, O2, O3 and O4


**Electronic Diagram**

**O1 ... O4**

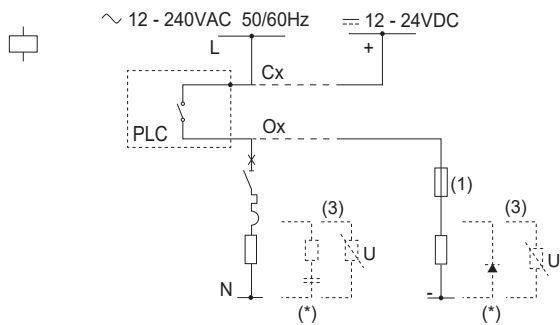

**Wiring Diagram**

**6 A**

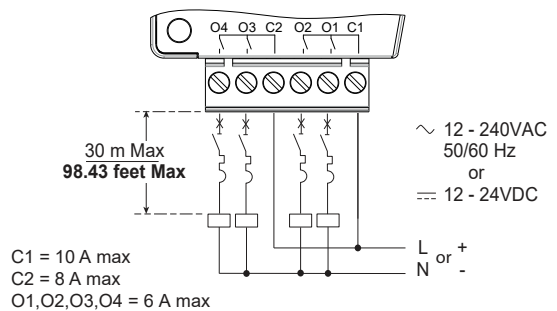

C1 = 10 A max  
C2 = 8 A max  
O1, O2, O3, O4 = 6 A max



(\*) Protection  
\*PLC: Millenium Slim Logic Controller

Common limits currents  
O1+O2= 10A max @25C (8A @40C, 4A @55C, 2.6 @ 60C)  
O3+O4=8A max @25C (8A @40C, 4A @ 55C, 2.6 @ 60C)

**Outputs**

**Static / PWM Outputs**

Millenium Slim - Type CB8S DC - 88983902 → Outputs O1, O2, O3 and O4

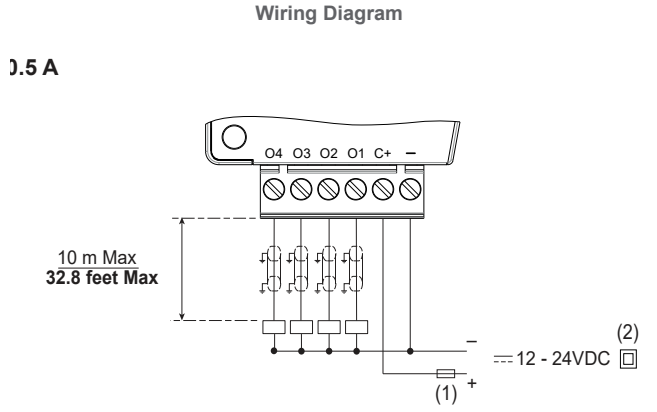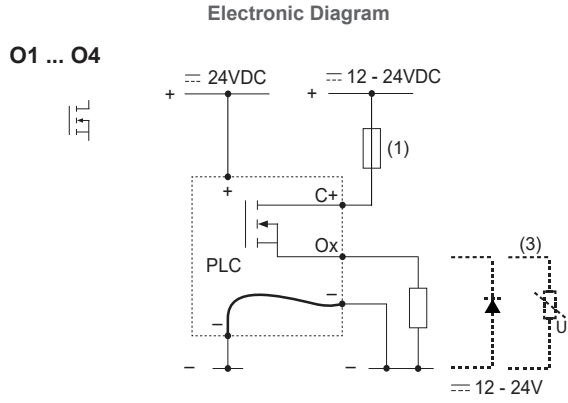

(3) Inductive load  
 \*PLC: Millenium Slim Logic Controller

(1) 1A (UL248) quick-blowing fuse, circuit-breaker, or circuit protector (US)  
 (2) Isolating source

**Accessories**

**BLUETOOTH DONGLE**



Description	Part Number
USB Dongle Bluetooth, CE, FCC and IC certified	<b>88980124</b>

**SIGNAL CONVERTER**



Description	Part Number
0-20 mA to 0-10 V	<b>88950108</b>

**TEMPERATURE PROBES**



Description	Part Number
NTC2, PVC probe	<b>89750174</b>



NTC1, TPE probe	<b>89750180</b>
-----------------	-----------------



NTC2, INOX probe	<b>89750182</b>
------------------	-----------------



NTC2, POM probe	<b>89750185</b>
-----------------	-----------------



NTC3, SILICONE probe	<b>89750186</b>
----------------------	-----------------

**TEMPERATURE CONVERTERS**



Description	Part Number
Pt1000 3-wire	<b>88950150</b>
Pt100 3-wire (-40 → +40°C)	<b>88950151</b>
Pt100 3-wire (0 → +100°C)	<b>88950152</b>
Pt100 3-wire (0 → +250°C)	<b>88950153</b>
Thermocouple J	<b>88950154</b>
Thermocouple K	<b>88950155</b>

**POWER SUPPLIES**



Description	Part Number
Modular of 10W	<b>89451001</b>



Modular of 30W	<b>89451003</b>
----------------	-----------------



Modular of 60W	<b>89451006</b>
----------------	-----------------



Modular of 100W	<b>89451010</b>
-----------------	-----------------

**TEMPERATURE SENSORS**



Description	Part Number
Air Sensor	<b>89750190</b>



Duct Probe	<b>89750191</b>
------------	-----------------



External Probe	<b>89750192</b>
----------------	-----------------



Remote/Submersible	<b>89750193</b>
--------------------	-----------------

**Warning:**

The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Crouzet and its subsidiaries reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.