

STA7130MPR/7131MPR/7132MPR

2-Phase to 2W 1-2 Phase Excitation Support, Built-in Sequencer

■Features

- Lineup of built-in current sense resistor and built-in protection circuit-type
- Power supply voltages, V_{BB} : 46 V (max), 10 to 44 V normal operating range
- Maximum output currents: 1 A, 1.5 A, and 2 A
- Supporting the clock-input-method micro-step drive (built-in sequencer)
- Self-excitation PWM current control with fixed off time
- Synchronous PWM chopping function prevents motor noise in Hold mode
- Sleep mode for reducing the IC input current in stand-by state
- ZIP type 18-pin molded package (STA package)

■Absolute Maximum Ratings(T_a=25°C)

Parameter	Symbol	Ratings	Unit	Remarks
Motor Supply Voltage	V _M	46	V	
Driver Supply Voltage	V _{BB}	46	V	
Output Current	I _O	*1	A	Mode F
Logic Input Voltage	V _{IN}	-0.3 to +6	V	
REF Input Voltage	V _{REF}	-0.3 to +6	V	
Sense Voltage	V _{RS}	±0.5	V	Excluding t _W <1μs
Power Dissipation	PD	3.5 12.5	W	When T _a = 25°C When T _c = 25°C
Junction Temperature	T _J	+150	°C	
Operating Ambient Temperature	T _a	-20 to +80	°C	
Storage Temperature	T _{stg}	-30 to +150	°C	

*1: Output current value may be limited for the STA7130MPR (1.0 A), 7131MPR (1.5 A), and 7132MPR (2.0 A), depending on the duty ratio, ambient temperature, and heating conditions.
Do not exceed junction temperature of T_J under any circumstances.

■Recommended Operating Conditions


Parameter	Symbol	Rating		Unit	Remarks
		min.	max.		
Motor Supply Voltage	V _M		44	V	
Driver Supply Voltage	V _{BB}	10	44	V	
Case Temperature	T _C		85	°C	Temperature at Pin-10 Lead (without Fin)

■Electrical Characteristics(V_{DD}=5V, V_{BB}=24V, T_a=25°C, unless otherwise specified)

Parameter	Symbol	Rating			Unit	Conditions
		min.	typ.	max.		
Main Supply Current	I _{BB}			10	mA	In operation
	I _{BBS}			3	mA	Sleep 1 and Sleep 2 modes
Output MOSFET Breakdown Voltage	V _{(BR)DSS}	100			V	
Output MOSFET ON Resistance	R _{DSON}				Ω	STA7130MPR STA7131MPR STA7132MPR
			0.7 0.25 0.18 0.85	0.85 0.4 0.24 1.1		
Output MOSFET Diode Forward Voltage	V _F				V	STA7130MPR STA7131MPR STA7132MPR
			0.95 0.95	1.2 2.1		
Maximum Clock Frequency	F _{Clock}	250			kHz	When Clock Duty = 50%
Logic Input Voltage	V _{IL}			0.7	V	
	V _{IH}	2.3				
Logic Input Current	I _{IL}		±10		~A	
	I _{IH}		±10			
REF Input Voltage	V _{REF}	0		0.9	V	
	V _{REFS}	2.0		5.5		Output OFF (Sleep 1)
REF Input Current	I _{REF}		±10		~A	
Sense Voltage	V _{SENSE}	V _{REF/3-0.03}	V _{REF/3}	V _{REF/3+0.03}	V	When step reference current ratio is 100%
Sleep-Enable Recovery Time	T _{SE}	100			~S	Sleep1&Sleep2
Switching Time	t _{con}		1.4		~S	Clock → Out ON
	t _{coff}		0.7		~S	Clock → Out OFF
			0.305		Ω	STA7130MPR STA7131MPR STA7132MPR
Sense Resistance	R _s		0.205			
			0.155			
Overcurrent Sense Voltage	V _{ocp}	0.65	0.7	0.75	V	When motor coil shorts out
			2.3			STA7130MPR
Overcurrent Sense Current V _{ocp} R _s	I _{ocp}		3.5		A	STA7131MPR
			4.5			STA7132MPR
Thermal Protection Temperature	T _{tsd}		125		°C	Rear of case (at the saturation temperature)
Logic Output Voltage	V _{LOL}			0.8	V	I _{LOL} = 5mA
Logic Output Current	I _{LOL}			5	mA	V _{LOL} = 0.8V
Step Reference Current Ratio	ModeF		100		%	
	ModeE		98.1			
	ModeC		92.4			
	ModeA		83.1			
	ModeB		70.7			
	Mode6		55.5			
	Mode4		38.2			
	Mode2		19.5			
PWM Minimum ON Time	t _{on(min)}		1.5		~S	
	toff1		11.5		~S	Mode 8 to F
PWM OFF Time	toff2		8.5		~S	Mode 4 to 6
	toff3		7		~S	Mode 2

*The direction in which current flows out of the device is regarded as negative.


■ Internal Block Diagram

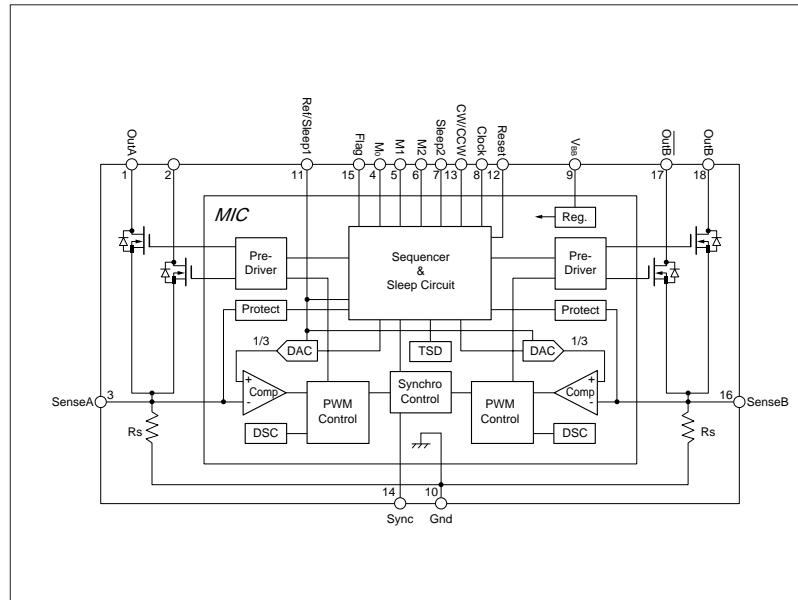

■ Pin Assignment


Pin No.	Symbol	Function
1	OutA	Phase A output
2	OutA/	Phase A output
3	SenseA	Phase A current sense
4	M ₀	2 phase excitation state output monitor output
5	M ₁	
6	M ₂	
7	Sleep2	Sleep 2 setting input
8	Clock	Step Clock input
9	V _{BB}	Driver supply (motor supply)
10	Gnd	Device GND
11	Ref/Sleep1	Control current mode/Sleep 1 setting input
12	Reset	Internal logic reset input
13	CW/CCW	Normal/reverse control input
14	Sync	PWM control signal input
15	Flag	Coil open/shorted detection output
16	SenseB	Phase B current sense
17	OutB/	Phase B output
18	OutB	Phase B output

■ Typical Connection Diagram

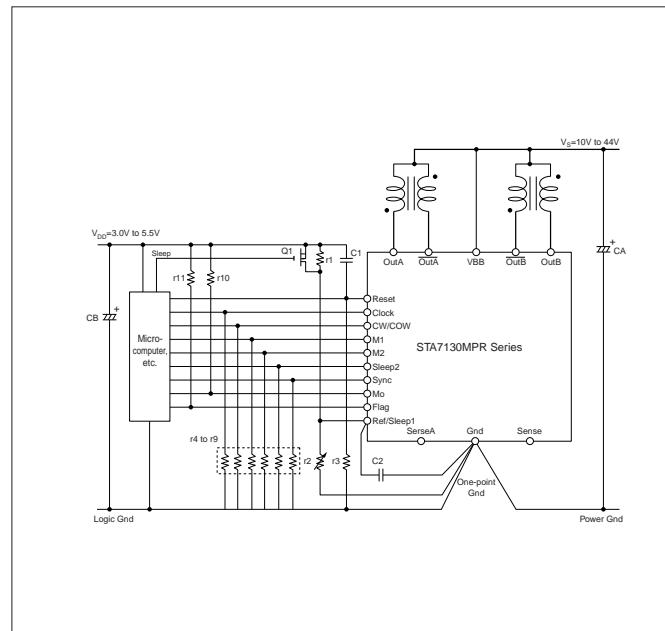

■ External Dimensions (ZIP18 with Fin [STA18Pin])

(Unit : mm)

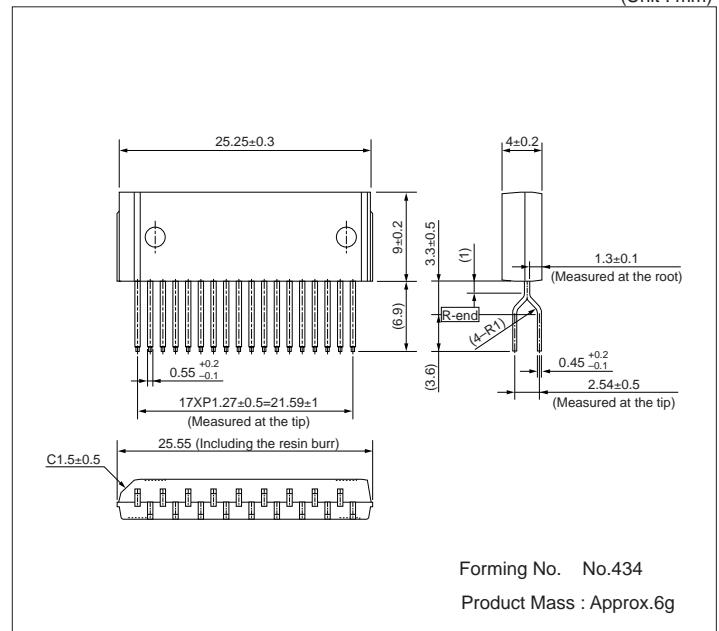

Forming No. No.434

Product Mass : Approx.6g