


Automotive Selection guide 2018

Discretes, logic and MOSFETs

AEC-Q100/Q101 qualified

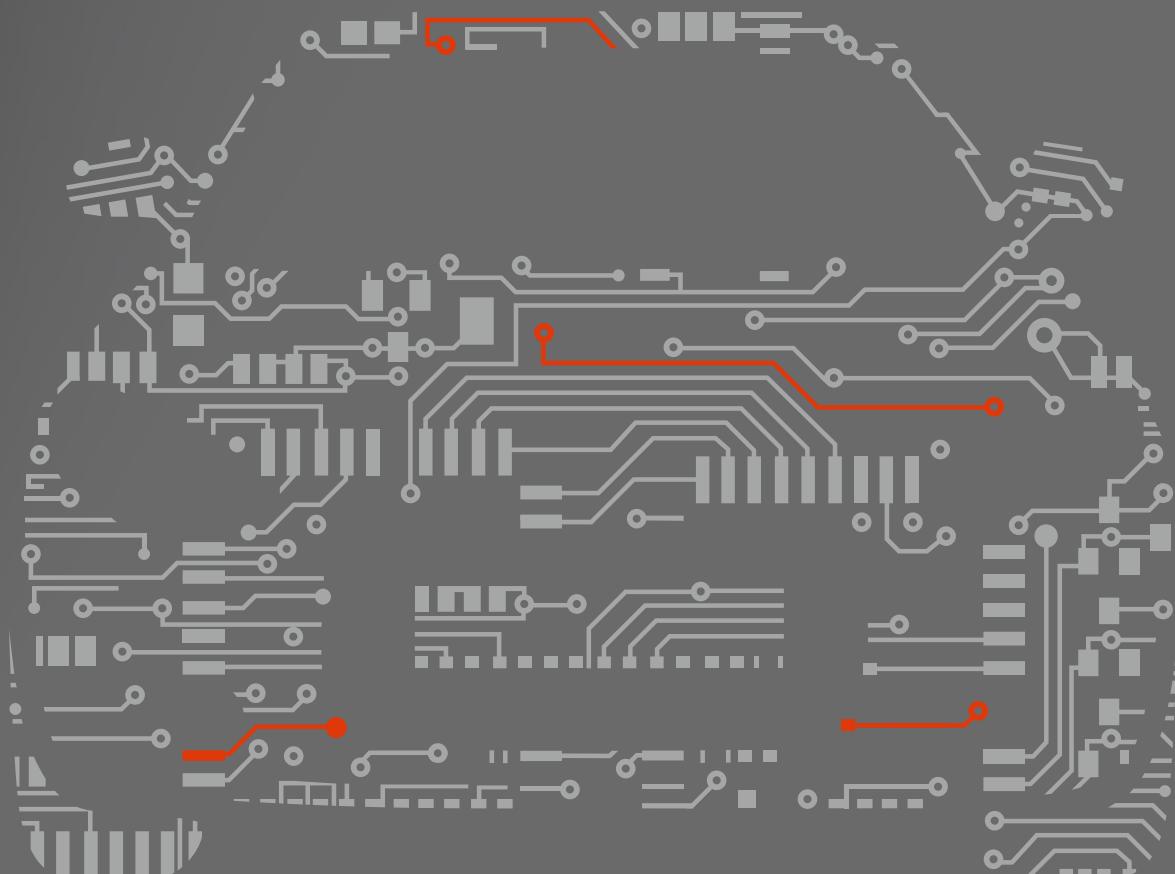

nexperia

EFFICIENCY WINS.

Driving efficiency takes pole position

Today's cars are undergoing the greatest transformation the industry has seen. Continued electrification is resulting in significant changes from the engine right through to the cloud. A lot of this is because vehicles need to be energy efficient, even as ever more electronic functionality is added to increase our safety and comfort.

Governments across the globe are stipulating mandates to reduce automotive CO₂ emissions to combat climate change and maintain resources. Obviously, the main focus is on the drivetrain – whether that is combustion, hybrid, or full electrical. However innovative technologies and systems for chassis, safety, lighting and body electronics are also helping drive up overall vehicle efficiency and reducing fuel consumption, CO₂ emissions and costs.

Consistently delivering the right functionality, with the right performance, in the right package is how Nexperia is helping 'driving efficiency' win. All our dedicated automotive discrete, MOSFET, logic and ESD protection devices are fully AEC-Q100/Q101 qualified. Our rigorous attention to detail and commitment to automotive quality yields sub-part-per-million (sub-ppm) failure rates.


Our energy- and design-efficient products are backed up by our own dedicated manufacturing facilities along with industry leading, proven supply chains that meet the long-term volume needs of the automotive industry. And along with traditional powertrain, chassis and body electronics our product and package innovation supports new and future system designs, from wireless car safety all the way through to electric vehicles.

So discover our complete dedicated automotive portfolio of Bipolar transistors, Diodes, ESD protection, MOSFETs and Logic devices in the **Nexperia Automotive Selection Guide 2018**. There is also a dedicated section on packages, highlighting the latest package innovations and packing options helping you to save space and weight. We hope this document makes it even easier for you to find the right product for your design.

Dirk Hildebrandt

Head of Automotive Sales & Marketing

Our commitment: quality and reliability



AEC-Q100/Q101 qualified

We qualify our products according to the automotive AEC-Q100/Q101 standard and even exceed its requirements, for instance when doing extended lifetime testing.



Go for quality

All our processes and manufacturing plants are subject to regular international and internal audits, including the following:

- › ISO9001
- › ISO/TS 16949 for automotive sites
- › ISO14001
- › OHSAS18001



Design for excellence

Nexperia's Design for Excellence (DfX) program ensures that each new development builds on past learning and that best practices are always employed. The result is continual product improvement.



Zero defect

Zero defect is our goal. To ensure continuous improvement failure analysis and the determination to find root causes is performed at all stages of development and production by adoption of quality-analysis tools and methods (e.g. Six-Sigma, Safe-Launch).

Rigorous attention to detail and commitment to quality have yielded a very low product failure rate of a single-digit part per billion (ppb).



Automotive Selection guide 2018.

Discretes, Logic and MOSFETs
AEC-Q100/Q101 qualified

Bipolar
transistors

1

Diodes

2

ESD protection,
TVS, filtering
and signal
conditioning

3

MOSFETs

4

Logic

5

Packages

6

Bipolar transistors	15	Diodes	35
General purpose bipolar transistors.....	16	Zener diodes.....	36
Transistors single NPN.....	16	General purpose Zener diodes	36
Transistors single PNP	16	Zener diodes specifications	37
High performance transistors (superior power dissipation)	17	Zener diodes specifications	37
Transistors double.....	17	Switching diodes	38
Medium power transistors	18	General purpose, high speed switching diodes <= 90V.....	38
Medium power transistors high performance (175 °C capable)	18	General purpose, high speed switching diodes 100V.....	38
High performance transistors (175°C capable & superior power dissipation)	18	General purpose, switching diodes >= 100V.....	39
High voltage transistors	19	Controlled avalanche switching diodes.....	40
LED driver	19	Low leakage current switching diodes	40
Constant current source.....	19	PN rectifiers	41
Darlington transistors.....	20	PN rectifiers - Automotive qualified.....	41
Schmitt triggers	20	Nomenclature pn-rectifier automotive grade types	41
Low noise transistors	20	Schottky rectifiers	42
Matched pair transistors - part 1.....	21	General purpose schottky diodes <= 250 mA.....	42
Matched pair transistors - part 2.....	21	Low capacitance schottky diodes	43
MOSFET driver	22	Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages.....	44
Medium frequency transistors.....	22	Medium power low VF schottky rectifiers single >= 200 mA.....	46
Low V_{CEsat} (BISS) transistors	23	Medium power low VF schottky rectifiers single >= 200 mA - leadless packages.....	47
Low V _{CEsat} (BISS) transistors single NPN up to 2000 mW... 23		Medium power low VF schottky rectifiers dual >= 200 mA.....	48
Low V _{CEsat} (BISS) transistors single NPN up to 750 mW.... 24		Nomenclatures	49
Low V _{CEsat} (BISS) transistors single PNP up to 2000 mW ... 25		ESD protection, TVS, filtering and signal conditioning	51
Low V _{CEsat} (BISS) transistors single PNP up to 750 mW..... 26		Low capacitance ESD protection for high-speed interfaces.....	52
Low V _{CEsat} (BISS) transistors double.....	27	Low capacitance ESD protection for high-speed interfaces.....	52
Low V _{CEsat} (BISS) transistors load switches	28	General ESD protection devices.....	53
Low V _{CEsat} (BISS) high voltage transistors	29	General purpose ESD protection devices.....	55
Low V _{CEsat} (BISS) RETs	29	Application-specific ESD solutions	56
Low V _{CEsat} (BISS) power transistors single	30	Audio interface protection.....	56
Low V _{CEsat} (BISS) power transistors double.....	30	Automotive high-speed network protection.....	56
Resistor equipped transistors (RETs)	31	Automotive in-vehicle network bus line protection.....	57
RETs 100 mA single - part 1.....	31	Charger port protection	57
RETs 100 mA single - part 2.....	31	Antenna protection (NFC, WiFi,...).....	58
RETs 100 mA double.....	32	USB protection.....	58
RETs 500mA single / double.....	32	Transient voltage surge suppressor (TVS).....	59
3-terminal adjustable shunt regulators	33	TVS diodes, compact.....	59
		TVS diodes, 24 W/40 W	59
		TVS diodes, 400 W	60
		TVS diodes, 600W	61
		Nomenclatures	62

Contents

MOSFETs	65	Packages	105
Automotive MOSFETs.....		Package details and packing methods	
Automotive grade MOSFETs nomenclature.....	66	Package details and packing methods SMD – Part 1 ..	106
N-channel 30V automotive power MOSFETs	66	Package details and packing methods SMD – Part 2 ..	107
N-channel 40V automotive power MOSFETs	67	Package details and packing methods SMD – Part 3 ..	108
N-channel 55V-60V automotive power MOSFETs	68	Packing details glass diodes, single ended and	
N-channel 75V-80V automotive power MOSFETs	71	through hole packages	109
N-channel 100V automotive power MOSFETs	72	Package cross reference list – Part 1	110
P-channel 30V-60V automotive power MOSFETs	73		
Small-signal automotive MOSFETs – Low R _{DS(on)}	74	Package cross reference	111
Small-signal automotive MOSFETs – High R _{DS(on)}	76	Package cross reference list – Part 2	111
Small-signal automotive MOSFETs – Dual.....	76	Package cross reference list – Part 3	112
Small-signal MOSFETs complementary	76	Package cross reference list – Part 4	113
Logic	79	Package cross reference list – Part 5	114
Automotive standard logic		Package cross reference matrix – Part 1	114
Analog switches	80	Package cross reference matrix – Part 2	115
Buffers/Inverters	81	Competitive cross reference - Logic	116
Counters/Frequency dividers.....	83	Packing methods.....	117
Bus switches.....	84	Product orientation (tape and reel pack).....	118
Digital decoders/Demultiplexers	84	Minimized outline drawings and reflow	
Digital multiplexers.....	85	soldering footprint	121
Flip-flops	85	2-pin SMD packages	121
Gates.....	87	3-pin SMD packages	123
Latches/Registered drivers.....	89	4-pin SMD packages	126
Level shifters/Translators	90	5-pin SMD packages	127
Multivibrators	90	6-pin SMD packages	128
Schmitt-triggers.....	91	8-pin SMD packages	132
Shift registers.....	92	8-pin SMD packages	133
Transceivers.....	94	More than 8-pin SMD packages	134
Automotive mini logic		Single-ended and through-hole packages.....	139
Analog switches	95		
Bus switches	95		
Buffers/Inverters	96		
Digital decoders/Demultiplexers	98		
Digital multiplexers.....	98		
Flip-flops	98		
Gates.....	99		
Latches/Registered drivers	100		
Multivibrators	101		
Schmitt-triggers.....	101		
Level shifters/Translators	102		

Discrete, Logic and MOSFET devices for automotive applications

Powertrain 48V

- › DCDC converter 48V:12V
- › Battery management system
- › Belt-starter-generator
- › Electric super charger
- › Water pump

Infotainment


- › Dashboard
- › Car audio
- › Connectivity audio
- › Entertainment
- › GPS
- › Car navigation display

Powertrain 12V ICE

- › Engine control
- › Fuel pump
- › Transmission
- › Alternator, battery, and starter

Lighting

- › Front LED lighting
- › LED Daytime running light
- › Rear LED lighting
- › Interior LED lighting

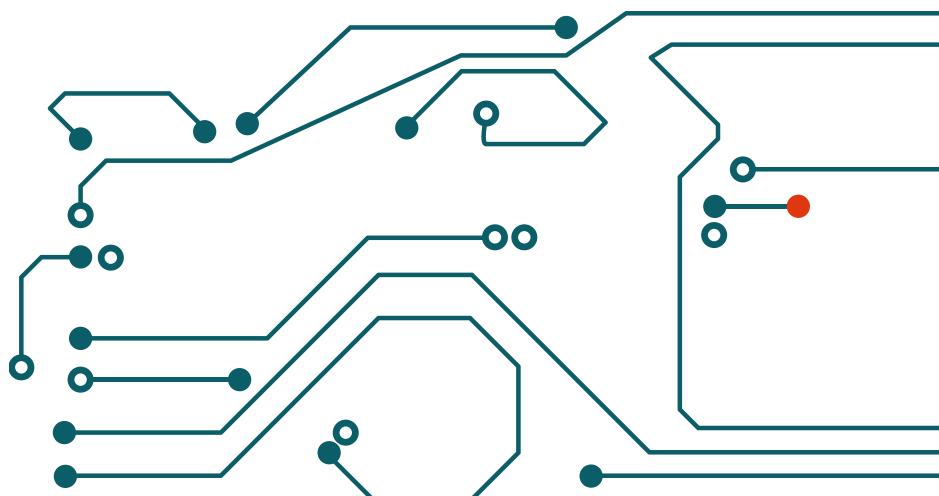

Covering all basic functions enabling automotive electronic applications


- › Switching MOSFETs
- › ESD / surge protection
- › Battery protection
- › Free-wheeling diode

Networking & Diagnostic

- › CAN
- › LIN
- › FlexRay
- › Ethernet
- › BroadR-Reach
- › Bluetooth, WiFi
- › USB

Safety and control

- › ADAS (camera, radar, lidar)
- › Airbag
- › TPMS
- › Collision warning
- › Parking assistant
- › Back monitor

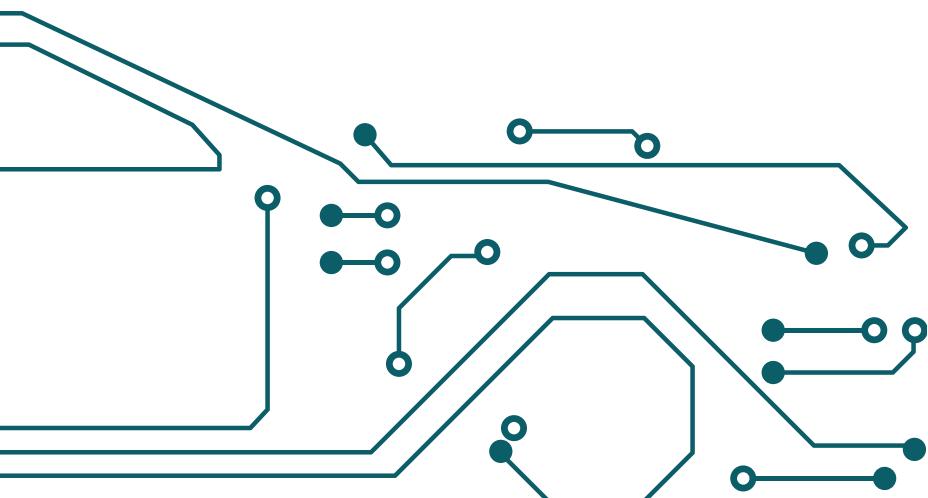

Chassis

- › Steering / EPS
- › Braking / ABS
- › Electronic Parking Brake
- › Traction control
- › Suspension
- › Roll stabiliation

Comfort and control

- › Power door
- › Power window
- › Climate control
- › Seat control
- › Mirror and wiper control

› Flyback diode

› DCDC conversion

› Voltage regulation

› Shift register

› I/O expansion

› LED drive

Technology focus: clip-bond packages


Thermally enhanced, space-saving, rugged package solutions



Miniaturization of Power

- › Solid wireless clip-bond packages for extra rugged and reliable operation
- › High-temperature use
- › High power density & efficiency
- › Space-saving solution for MOSFETs, diodes, bipolar transistors

LFPAK space efficiency

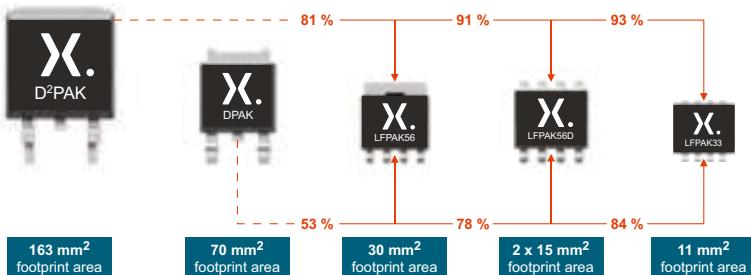

Technology focus: Leadless package solutions

Leadless D(Q)FN packages with side-wettable flanks,
AOI capable. The ultimate space saving solution



Automotive leadless

- › The ultimate space saving solution for automotive
- › High board level reliability, robust solder joints
- › Easy optical inspection, AOI capable
- › For Logic, ESD protection, diodes, bipolar transistors and MOSFETs



Electrification of the car

Supported by product portfolio and roadmap

Increased electronic functions
(Braking, steering, fuel injection, automatic transmission)



Better safety

- › Schottkys and FRDs up to 200V with low IR and low VF
- › MOSFETs with high drain current capability. (ID), Avalanche ruggedness and low RDS_{on}

Replacement of electric/mechanical relays



Higher reliability through MOSFETs

- › Power MOSFETs and Bipolar transistors
- › Space saving, power efficient, low noise

Increased information sensing & processing
(Networks, infotainment)



Protection for In-Vehicle Networking

ESD protection devices to safeguard interfaces of communication buses, IVN, infotainment systems (incl. solutions for Type-C connector)

ADAS *(Vision & Safety)*



Electrification of the powertrain *(e.g. mild hybrids, plug-in hybrids)*



Compact designs through Discretes in advanced packages

- › Schottky rectifiers up to 100V in DFN and CFP packages
- › Low VCEsat power bipolar transistors in LFPAK (175 °C) to support voltage regulation / core supply
- › ESD Protection

48V Power rail

- › DCDC converter 48V:12V
- › Battery management system
- › Belt-starter-generator
- › Electric super charger
- › Water pump
- › Power MOSFET 80V and 100V
- › Schottky rectifier up to 100V
- › FRD up to 200V



Bipolar transistors

1

General purpose bipolar transistors.....	16
Transistors single NPN.....	16
Transistors single PNP	16
High performance transistors (superior power dissipation)	17
Transistors double.....	17
Medium power transistors	18
Medium power transistors high performance (175 °C capable)	18
High performance transistors (175°C capable & superior power dissipation)	18
High voltage transistors.....	19
LED driver	19
Constant current source	19
Darlington transistors.....	20
Schmitt triggers.....	20
Low noise transistors.....	20
Matched pair transistors - part 1	21
Matched pair transistors - part 2	21
MOSFET driver	22
Medium frequency transistors.....	22
Low V_{CESat} (BISS) transistors	23
Low V _{CESat} (BISS) transistors single NPN up to 2000 mW.....	23
Low V _{CESat} (BISS) transistors single NPN up to 750 mW.....	24
Low V _{CESat} (BISS) transistors single PNP up to 2000 mW	25
Low V _{CESat} (BISS) transistors single PNP up to 750 mW.....	26
Low V _{CESat} (BISS) transistors double	27
Low V _{CESat} (BISS) transistors load switches	28
Low V _{CESat} (BISS) high voltage transistors	29
Low V _{CESat} (BISS) RETs	29
Low V _{CESat} (BISS) power transistors single	30
Low V _{CESat} (BISS) power transistors double	30
Resistor equipped transistors (RETs)	31
RETs 100 mA single - part 1.....	31
RETs 100 mA single - part 2.....	31
RETs 100 mA double.....	32
RETs 500mA single / double.....	32
3-terminal adjustable shunt regulators	33

General purpose bipolar transistors

Transistors single NPN

Package					SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
									
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
P _{tot} (mW)					250	200	750	250	250
V _{CEO} (V)	I _c (mA)	h _{FE} min/typ	h _{FE} max	f _T min (MHz)					
25	100	450	1200	100		PMST5089			
		110 - 200	450 - 800	100	BC848B	BC848W			
		350	900	100		PMST5088			
32	100	110 - 420	220 - 800	100	BCW31 / 32 / 33				
		180 - 380	310 - 630	250	BCW60B / C / D				
45	100	110 - 420	220 - 800	100	BC847 / A / B / C	BC847W / AW / BW / CW	BC847AQA / BQA / CQA	BC847AM / BM / CM	BC847AMB / BMB / CMB
		120 - 380	220 - 630	100	BCX70G / H / J / K				
		110 - 200	220 - 450	100	BCW71 / 72				
		500	1250	100	PMBT6429	PMST6429			
50	100	210 - 290	340 - 460	100 - 150	2PD601ART 2PD601ARL 2PD601ASL	2PD601ARW / SW			
		250	650	100	PMBT6428	PMST6428			
60	100	110 - 200	220 - 450	100	BCV71 / 72				
65	100	110 - 200	220 - 450	100	BC846 / A / B	BC846W / AW / BW		BC846BM	BC846BMB
		150	120 - 200	240 - 400	80	NXP3875Y / G			
50	150	120 - 270	270 - 560	100		2PC4081Q / R / S		2PC4617QM / RM	2PC4617QMB / RMB
	200	210	340	100	2PD601BRL				
		290	460	100	2PD601BSL				
45	500	100 - 250	250 - 600	100	BC817 / -16 / -25 / -40	BC817W / -16W / -25W / -40W	BC817-25QA/40QA		
		100	600	100	BCX19				
50	500	85 - 170	170 - 340	140 - 180	2PD602AQL 2PD602ARL 2PD602ASL	2PD1820AR / S			
60	500	50	-	100		PMSTA05			
45	800	100-250	250-600	100	BCW66F/G/H				
80	500	100	-	50	PMBTA06	PMSTA06			

Transistors single PNP

Package					SOT23	SOT323 (SC-70)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)
									
Size (mm)					2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37
P _{tot} (mW)					250	200	750	250	250
V _{CEO} (V)	I _c (mA)	h _{FE} min/typ	h _{FE} max	f _T min (MHz)					
30	100	125 - 220	500 - 800	100	BC858B	BC858W			
		120 - 215	260 - 500	100	BCW29 / 30				
		180 - 380	310 - 630	100	BCW61B / C / D				
45	100	210 - 290	340 - 460	70 - 80	2PB709ART 2PB709ARL 2PB709ASL	2PB709ARW / SW			
		180 - 380	310 - 630	100	BCX71H / J / K				
		120 - 215	260 - 500	100	BCW69 / 70				
		125 - 420	250 - 800	100	BC857 / A / B / C	BC857W / AW / BW / CW	BC857AQA / BQA / CQA	BC857AM / BM / CM	BC857AMB / BMB / CMB
60	100	120	260	150	BCW89				
65	100	125 - 200	250 - 475	100	BC856 / A / B	BC856W / AW / BW		BC856BM	BC856BMB
100	100	30	-	50	BSS63				
50	150	120 - 270	270 - 560	100		2PA1576Q / R / S		2PA1774QM / RM / SM	2PA1774QMB / RMB / SMB
	200	210	340	100	2PB709BRL				
		290	460	100	2PB709BSL				
25	500	100	600	80	BCX18				
45	500	100 - 250	250 - 600	80	BC807 / -16 / -25 / -40	BC807W / -16W / -25W / -40W	BC807-25QA/40QA		
		100	600	80	BCX17				
50	500	85 - 170	170 - 340	100 - 140	2PB710ARL 2PB710ASL	2PB1219AQ / R / S			
60	500	100	-	50		PMSTA55			
80	500	100	-	50	PMBTA56	PMSTA56			
45	800	100-250	250-600	80	BCW68F/G/H				

High performance transistors (superior power dissipation)

Types in **bold** represent new products

							SOT23
							
Package							
Size (mm)							2.9 x 1.3 x 1.0
P_{tot} (mW)							775
Polarity	V _{CEO} (V)	V _{ebo} (V)	I _c (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)	
NPN	45	5	0,5	100	250	100	BC817K-16
				160	400	100	BC817K-25
				250	600	100	BC817K-40
PNP	45	5	0,5	100	250	80	BC807K-16
				160	400	80	BC807K-25
				250	600	80	BC807K-40

Transistors double

						SOT457 (SC-74)	SOT363 (SC-88)	SOT666	DFN1412-6 (SOT1268)	DFN1010B-6 (SOT1216)
										
						2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.4 x 1.2 x 0.5	1.0 x 1.0 x 0.37
P_{tot} (mW)						750	300	300	480	350
Polarity	V _{CEO} (V)	I _c (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)					
NPN	40	100	120	450	100		PUMX1	PEMX1		
	45	100	200	450	100	BC847DS	BC847BS	BC847BV	BC847RA	BC847QAS
	65	100	110	-	100		BC846S			
			200	450	100	BC846DS	BC846BS			
	50	150	120	560	100		PUMX2			
PNP	45	500	160	400	80	BC817DS			BC817RA	
	40	100	120	450	100	PIMT1	PUMT1	PEMT1		
	45	100	200	450	100		BC857BS	BC857BV	BC857RA	BC857QAS
	65	100	110	-	100		BC856S			
			200	450	100		BC856BS			
NPN / PNP	45	500	160	400	80	BC807DS			BC807RA	
	40	100	120	450	100		PUMZ1	PEMZ1		
	45	100	200	450	100		BC847BPN	BC847BVN	BC847RAPN	BC847QAPN
	50	100	120	560	100	PIMZ2	PUMZ2			
	65	100	200	450	100		BC846BPN			
	12	500	200	-	250 / 100			PEMZ7		
	45	500	160	160	100 / 800	BC817DPN			BC817RAPN	

General purpose bipolar transistors

Medium power transistors

						SOT223 (SC-73)	SOT89 (SC-62)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
Package									
Size (mm)						6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P _{tot} (mW)						1700	1300	1300	1300
Polarity	V _{CEO} (V)	I _c (A)	h _{FE} min	h _{FE} max	f _T min (MHz)				
NPN	20	2	85 - 160	375	40	BCP68 / -25	BC868 / -25	BC68PA / BC68-25PA	BC68PAS / BC68-25PAS
	45	1	63 - 100	160 - 250	100	BCP54 / -10 / -16	BCX54 / -10 / -16	BC54PA / BC54-10PA / BC54-16PA	BC54PAS / BC54-10PAS / BC54-16PAS
	60	1	63 - 100	160 - 250	100	BCP55 / -10 / -16	BCX55 / -10 / -16	BC55PA / BC55-10PA / BC55-16PA	BC55PAS / BC55-10PAS / BC55-16PAS
			100	300	100	BSP41	BSR41		
	80	1	63 - 100	160 - 250	100	BCP56 / -10 / -16	BCX56 / -10 / -16	BC56PA / BC56-10PA / BC56-16PA	BC56PAS / BC56-10PAS / BC56-16PAS
			40 - 100	120 - 300	100	BSP43	BSR43		
PNP	20	2	85 - 160	250 - 375	40	BCP69 / -16 / -25	BC869 / -16 / -25	BC69PA / BC69-16PA / BC69-25PA	BC69PAS / BC569-16PAS / BC69-25PAS
	45	1	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP51 / -10 / -16	BCX51 / -10 / -16	BC51PA / BC51-10PA / BC51-16PA	BC51PAS / BC51-10PAS / BC51-16PAS
	60	1	63 - 100	160 - 250	100	BCP52 / -10 / -16	BCX52 / -10 / -16	BC52PA / BC52-10PA / BC52-16PA	BC52PAS / BC52-10PAS / BC52-16PAS
			40 - 100	120 - 300	100	BSP31	BSR30 / 31		
	80	1	63 - 100	160 - 250	115 ¹⁾ - 145 ¹⁾	BCP53 / -10 / -16	BCX53 / -10 / -16	BC53PA / BC53-10PA / BC53-16PA	BC53PAS / BC53-10PAS / BC53-16PAS
			40 - 100	120 - 300	100	BSP32 / 33	BSR33		

1) Typical value

Medium power transistors high performance (175 °C capable)

Types in **bold** represent new products

							SOT223 (SC-73)
Package							
Size (mm)							6.5 x 3.5 x 1.65
P _{tot} (mW)							1700
Polarity	V _{CEO} (V)	V _{EBO} (V)	I _c (A)	h _{FE} min	h _{FE} max	f _T min(MHz)	
NPN	80	7	1	63	250	100	BCP56H
					160	100	BCP56-10H
				100	250	100	BCP56-16H
PNP	80	7	1	63	250	100	BCP53H
					100	100	BCP53-10H
				100	250	100	BCP53-16H

High performance transistors (175°C capable & superior power dissipation)

Types in **bold** represent new products

							SOT23
Package							
Size (mm)							2.9 x 1.3 x 1.0
P _{tot} (mW)							950
Polarity	V _{CEO} (V)	V _{EBO} (V)	I _c (A)	h _{FE} min	h _{FE} max	f _T min(MHz)	
NPN	45	7	0.5	100	250	100	BC817K-16H
				160	400	100	BC817K-25H
				250	600	100	BC817K-40H

High voltage transistors

Package					SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	SOT23	SOT323 (SC-70)
Size (mm)					6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)					1700	1300	750	250	200
NPN	Polarity	V _{CEO} (V)	I _C (mA)	h _{FE} min	h _{FE} max	f _T min (MHz)			
	140	300	60	250	100			PMBT5550	PMST5550
		300	80	250	100			PMBT5551 / BSR19A	PMST5551
	250	100	50	-	60	BF722	BF622	BF822	
		300	100	50	-	BF720	BF620	BF820	BF820W
			40	-	50	PZTA42	PXTA42	PMBTA42	PMSTA42
PNP	350	100	40	-	70	BSP19	BST39		
		400	300	50	200	20	PZTA44	PMBTA44	
	100	100	30	-	50			BSS63	
		250	100	50	-	BF723			
			50	-	60		BF623	BF823	
	300	100	50	-	60		BF621	BF821	
		40	-	50	PZTA92	PXTA92	PMBTA92	PMSTA92	
2 x NPN	300	100	40	-	50			PMBTA42DS	

For high-voltage transistors with increased performance please refer to our high-voltage low VCEsat (BISS) transistor portfolio on page 29.

LED driver

Package					SOT457	SOT23
Size (mm)					2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0
P _{tot} (mW)					750	480
Vs supply voltage [V]			LED drive current [mA] @ Vs=10V			
18			10			NCR401T
			20			NCR402T
40			10		NCR401U	
			20		NCR402U	
			50		NCR405U	

Constant current source

SOT353 (SC-88A)					
Package					
Size (mm)	2.0 x 1.25 x 0.95				
P _{tot} (mW)	335				
Type	PSSI2021SAY				
Description	Maximum supply voltage	Maximum supply current	Typical stabilized output current	Minimum stabilized output current	Maximum stabilized output current
Parameter	V _S max (V)	I _S max (mA)	I _{out} typ (μA)	I _{out} min (mA)	I _{out} max (mA)
Value	75	2.2	15	0.015	50

General purpose bipolar transistors

Darlington transistors

Package					SOT223 (SC-73)	SOT89 (SC-62)	SOT23
Size (mm)					6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.9 x 1.3 x 1.0
P _{tot} (mW)					1700	1300	250
Polarity	V _{CEO} (V)	I _c (mA)	h _{FE} min	f _T min (MHz)			
NPN	30	500	10000	125			PMBTA13
			20000		PZTA14	PXTA14	PMBTA14
			220			BCV29	BCV27
	45	1000	2000	200	BSP50	BST50	
	60	500	10000	220		BCV49	BCV47
		1000	2000	200	BSP51	BST51	
	80				BSP52	BST52	
	PNP	30	500	20000	125		PMBTA64
					220	BCV28	BCV26
		45	1000	2000	200	BSP60	BST60
		60	500	10000	220		BCV48
			1000	2000	200	BSP61	BST61
		80				BSP62	BST62

Schmitt triggers

Package							SOT143B
Size (mm)							2.9 x 1.3 x 1.0
P _{tot} (mW)							250
Polarity	V _{CEO} (V) TR1	V _{CEO} (V) TR2	I _c (mA)	h _{FE} min	h _{FE} max	V _{CEsat} typ (mV)	
NPN	30	6	100	110	800	250	BCV63 / B
PNP	30	6	100	220	475	250	BCV64B

Low noise transistors

Package							SOT23	SOT323 (SC-70)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P _{tot} (mW)							250	200
Polarity	V _{CEO} (V)	I _c (mA)	Noise Figure max (dB)	h _{FE} min	h _{FE} max	f _T min (MHz)		
NPN	30	100	4	200	450	100	BC849B	BC849BW
				420	800	100	BC849C	BC849CW
	45	100	4	200	450	100	BC850B	BC850BW
				420	800	100	BC850C	BC850CW
PNP	30	100	4	220	475	100	BC859B	BC859BW
				420	800	100	BC859C	BC859CW
	45	100	4	220	475	100	BC860B	BC860BW
				420	800	100	BC860C	BC860CW

Matched pair transistors - part 1

Types in **bold** represent new products

Package							SOT143B	SOT457 (SC-74)	LFPAK56D (SOT1205)	
										
Size (mm)							2.9 x 1.3 x 1.0	2.9 x 1.5 x 1.0	5 x 6 x 1.1	
P _{tot} (mW)							250	750	1250	
Polarity	V _{CEO} (V)	I _c (mA)	h _{FE} min	h _{FE} max	h _{FE1} /h _{FE2}	V _{BE1} - V _{BE2} (mV)				
NPN	30	100	110	800	0.7 ¹⁾	n.a.	BCV61/A/B/C			
	45	100	200	450	0.9 ¹⁾	n.a.	BCM61B			
	80	100	63	250	0.95	n.a.		BCM847DS		
	100	3000	150	-	0.95	n.a.			PHPT610035NK	
Configuration										
PNP	30	100	100	800	0.7 ¹⁾	n.a.	BCV62/A/B/C			
	45	100	200	450	0.9 ¹⁾	n.a.	BCM62B			
	65	100	200	450	0.9	2		BCM857DS		
	80	100	63	250	0.95	n.a.	BCM53DS			
	100	3000	150	-	0.9	n.a.			PHPT610035PK	
Configuration										

¹⁾I_{C1} / I_{E2}

Matched pair transistors - part 2

Types in **bold** represent new products


Package							SOT353 (SC-88A)	SOT363 (SC-88)	SOT666	SOT1216 (DFN1010B-6)
										
Size (mm)							2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.1 x 1.0 x 0.37
P _{tot} (mW)							300	300	300	350
Polarity	V _{CEO} (V)	I _c (mA)	h _{FE} min	h _{FE} max	h _{FE1} /h _{FE2}	V _{BE1} - V _{BE2} (mV)				
NPN	45	100	200	450	0.9 ¹⁾	2		BCM847BS		BCM847BV
					0.95	2	PMP4501G		PMP4501Y	PMP4501V BCM847QAS PMP4501QAS
					0.98	2	PMP4201G		PMP4201Y	PMP4201V
	65	100	200	450	0.9	2	BCM846BS			
Configuration										
PNP	45	100	200	450	0.9 ¹⁾	2		BCM857BS		BCM857BV
					0.95	2	PMP5501G		PMP5501Y	PMP5501V BCM857QAS PMP5501QAS
					0.98	2	PMP5201G		PMP5201Y	PMP5201V
	65	100	200	450	0.9	2	BCM856BS			
Configuration										

¹⁾I_{C1} / I_{E2}

General purpose bipolar transistors

MOSFET driver

Types in **bold** represent new products

V_{CEO} (V)	I_C (A)	I_{cm} [A]	Type	Package	Remark	Configuration
30	0.1	0.2	BCV65	SOT143B 	General-purpose transistors	
40	0.6	1	PMD2001D	SOT457 	Switching transistors with reduced storage time	
	1	2	PMD3001D		Low V_{CEsat}	

Medium frequency transistors

Package						SOT23	SOT323 (SC-70)
Size (mm)						2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)						250	200
Polarity	V_{CEO} (V)	I_C (mA)	h_{FE} min	h_{FE} max	f_T typ (MHz)		
NPN	15	100	40	-	500	BF570	
	20	25		85	>275	BFS20	BFS20W
		30	65	225	260	BFS19	
	40	25	67	220	380	BF840	
PNP	30	25	25	50	250	BF824	BF824W
	40		50	-	>325	BF550	

Low V_{CESat} (BISS) transistors single NPN up to 2000 mWTypes in **bold** represent new products

Package							SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)
											
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.8 x 1.5 x 1.5	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P _{tot} (mW)							1700	1650	750	1300	1300
V _{CEO} (V)	I _c (A)	I _{CM} (A)	h _{FE} min/typ	@ I _c (A)	@ V _{CE} (V)	V _{CESat} typ (mV); I _c = 0.5 A; I _b = 0.05 A					
12	5.3	10.6	300 / 530	0.5	2	18		PBSS301NX			
	5.8	11.6	300 / 530	0.5	2	18	PBSS301NZ				
20	3	5	220 / 390	0.5	2	40		PBSS4320X			
	4	15	300 / 450	0.5	2	30			PBSS301ND		
	5	10	300 / 450	0.5	2	35		PBSS4520X			
	5.3	10.6	300 / 570	0.5	2	20		PBSS302NX			
	5.8	10.2	300 / 570	0.5	2	20	PBSS302NZ				
	6	7	280 / 440	0.5	2	20				PBSS4620PA	
	7	15	300 / 550	0.5	2	12		PBSS4021NX			
	8	20	300 / 550	0.5	2	9	PBSS4021NZ				
30	3	5	300 / 490	0.5	2	45		PBSS4330X			
	3	5	300 / 465	0.5	2	40				PBSS4330PAS	
	3.5	6	300 / 500	0.5	2	70			PBSS4032ND ³⁾		
	4.7	10	300 / 500	0.5	2	57		PBSS4032NX ³⁾			
	5.1	10.2	300 / 480	0.5	2	20		PBSS303NX			
	5.4	10	300 / 500	0.5	2	57	PBSS4032NZ ³⁾				
	5.5	11	300 / 480	0.5	2	20	PBSS303NZ				
	2	3	300 / -	0.5	5	140		PBSS4240X			
40	4	15	300 / 520	0.5	2	35			PBSS302ND		
		10	300 / 500	0.5	2	21		PBSS4540X			
	5	10	300 / 500	0.5	2	25	PBSS4540Z				
50	2	5	300 / -	0.5	2	90 ²⁾		PBSS4250X			
	3	5	200 / 280	0.5	2	65			PBSS4350D		
			300 / 460	0.5	2	50		PBSS4350X			
			200 / 280	0.5	2	60 ¹⁾	PBSS4350Z				
60	1	2	170 / -	0.5	10	200 ²⁾		PBSS4160X			
	3	6	200 / 360	0.5	5	45				PBSS4360PAS	
			200 / -	0.5	5	45	PBSS4360Z	PBSS4360X			
			345 / 570	0.5	2	40			PBSS303ND		
	4.7	9.4	300 / 520	0.5	2	25		PBSS304NX			
	5.2	10.4	300 / 520	0.5	2	25	PBSS304NZ				
	6.2	15	300 / 500	0.5	2	17		PBSS4041NX			
80	7	15	300 / 500	0.5	2	13	PBSS4041NZ				
	3	6	240 / 360	0.5	2	40			PBSS304ND		
	4	10	250 / 400	0.5	2	25		PBSS4480X			
	4.6	9.2	300 / 470	0.5	2	25		PBSS305NX			
100	5.1	10.2	300 / 470	0.5	2	25	PBSS305NZ				
	1	3	150 / 290	0.25	10	75			PBSS8110D		
			150 / 290	0.25	10	73		PBSS8110X			
			150 / 290	0.25	10	73	PBSS8110Z				
	3	4	170 / 275	0.5	2	45			PBSS305ND		
	4.5	9	200 / 330	0.5	2	27		PBSS306NX			
	5.1	10.2	200 / 330	0.5	2	27	PBSS306NZ				

¹⁾ I_c / I_b = 20 ²⁾ V_{CESat} (max) ³⁾ Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors

Low V_{CEsat} (BISS) transistors single NPN up to 750 mW

Types in **bold** represent new products

Package							SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)							480	350	430	250	250	750
V_{CEO} (V)	I_c (A)	I_{CM} (A)	h_{FE} min/typ	@ I_c (A)	@ V_{CE} (V)	$V_{CEsat\ typ}$ (mV); $I_c = 0.5$ A; $I_b = 0.05$ A						
15	0.5	1	200 / 325	0.01	2	-				PBSS2515M	PBSS2515MB	
20	1	3	350 / 470	0.1	2	110 ²⁾	PBSS4120T					
	2	5	220 / 330	0.1	2	45	PBSS4320T					
30	4.3	8	300 / 550	0.5	2	21	PBSS4021NT					
		1.5	230 / 380	0.5	2	90						PBSS4130QA
	2	3	300 / 450	0.5	2	120 ²⁾	PBSS4130T					
		300 / 450	0.5	2	70	PBSS4230T						
		2.6	230 / 380	0.5	2	75						PBSS4230QA
40	0.5	1	200 / 550	0.01	2	200 ²⁾				PBSS2540M	PBSS2540MB	
	1	2	300 / 440	0.5	5	130		PBSS4140U				
			300 / 510	0.5	5	120	PMMT491A					
		3	300 / 420	0.5	5	130	PBSS4140T					
	2	3	350 / 470	0.1	2	70			PBSS4240Y			
50	2	5	300 / 495	0.5	2	60	PBSS4350T					
60	1	1.5	150 / 240	0.5	2	90						PBSS4160QA
		2	200 / 420	0.5	5	120		PBSS4160U				
	2	2	200 / 350	0.5	5	110	PBSS4160T					
	3.8	8	150 / 240	0.5	2	75						PBSS4260QA
100	1	3	300 / 500	0.5	2	29	PBSS4041NT					
			150 / 400	0.25	10	80			PBSS8110Y			
			150 / 300	0.25	10	70	PBSS8110T					

¹⁾ $I_c / I_b = 20$ ²⁾ V_{CEsat} (max) ³⁾ Optimized for high-speed switching

Low V_{CESat} (BISS) transistors single PNP up to 2000 mWTypes in **bold** represent new products

							SOT223 (SC-73)	SOT89 (SC-62)	SOT457 (SC-74)	DFN2020D-3 (SOT1061D)
Package										
Size (mm)							6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	2.3 x 1.5 x 1.0	2.0 x 2.0 x 0.62
P _{tot} (mW)							1700	1650	750	1300
V _{CEO} (V)	I _c (A)	I _{CM} (A)	h _{FE} min/typ	@ I _c (A)	@ V _{CE} (V)	V _{CESat} typ (mV); I _c = 0.5 A; I _b = 0.05 A				
12	5.3	10.6	250 / 400	0.5	2	20		PBSS301PX		
	5.7	11.4	250 / 400	0.5	2	20	PBSS301PZ			
20	3	5	200 / –	0.5	2	80 ²⁾			PBSS5320D	
			220 / 450	0.5	2	50		PBSS5320X		
	4	15	250 / 400	0.5	2	35			PBSS301PD	
	5	10	300 / 430	0.5	2	45		PBSS5520X		
	5.1	10.2	250 / 370	0.5	2	25		PBSS302PX		
	5.5	11	250 / 370	0.5	2	25	PBSS302PZ			
	6.2	15	250 / 400	0.5	2	18		PBSS4021PX		
30	2.7	5	200 / 350	0.5	2	87			PBSS4032PD ³⁾	
	3	5	200 / 380	0.5	2	50		PBSS5330X		
			200 / 320	0.5	2	45			PBSS5330PAS	
	4.2	10	200 / 350	0.5	2	70		PBSS4032PX ³⁾		
	4.4	10	200 / 350	0.5	2	70	PBSS4032PZ ³⁾			
	5.1	10.2	250 / 400	0.5	2	25		PBSS303PX		
	5.3	10.6	250 / 400	0.5	2	25	PBSS303PZ			
40	2	3	215 / –	0.5	5	170		PBSS5240X		
	4	15	200 / 310	0.5	2	46			PBSS302PD	
		10	250 / 370	0.5	2	33		PBSS5540X		
			250 / 350	0.5	2	40 ¹⁾	PBSS5540Z			
50	2	5	200 / –	0.5	2	90 ²⁾		PBSS5250X		
		5	200 / 300	0.5	2	70			PBSS5350D	
	3	5	200 / 375	0.5	2	70		PBSS5350X		
			200 / 300	0.5	2	70	PBSS5350Z			
60	3	6	130 / 220	0.5	5	55				PBSS5360PAS
			130 / –	0.5	5	55	PBSS5360Z	PBSS5360X		
			180 / 265	0.5	2	55			PBSS303PD	
	4.2	8.4	200 / 295	0.5	2	35		PBSS304PX		
	4.5	9	200 / 295	0.5	2	35	PBSS304PZ			
	5	15	200 / 300	0.5	2	30		PBSS4041PX		
	5.7		200 / 300	0.5	2	22	PBSS4041PZ			
80	3	5	155 / 225	0.5	2	55			PBSS304PD	
		10	200 / 300	0.5	2	35		PBSS5480X		
	8		200 / 280	0.5	2	36		PBSS305PX		
	4.5	9	200 / 280	0.5	2	36	PBSS305PZ			
100	1	3	150 / 350	0.5	5	100			PBSS9110D	
			150 / 350	0.5	5	90		PBSS9110X		
			150 / –	0.5	5	90	PBSS9110Z			
	2	3	175 / 275	0.5	2	65			PBSS305PD	
	3.7	7.4	200 / 300	0.5	2	45		PBSS306PX		
	4.1	8.2	200 / 300	0.5	5	45	PBSS306PZ			

¹⁾ I_c / I_b = 20 ²⁾ V_{CESat} (max) ³⁾ Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors

Low V_{CEsat} (BISS) transistors single PNP up to 750 mW

Types in **bold** represent new products

Package							SOT23	SOT323 (SC-70)	SOT363 (SC-88)	DFN1006-3 (SOT883)	DFN1006B-3 (SOT883B)	DFN1010D-3 (SOT1215)
Size (mm)							2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	1.1 x 1.0 x 0.37
P_{tot} (mW)							480	350	430	250	250	750
V_{CEO} (V)	I_C (A)	I_{CM} (A)	h_{FE} min/typ	@ I_C (A)	@ V_{CE} (V)	$V_{CEsat\ typ}$ (mV); $I_C = 0.5\ A; I_B = 0.05\ A$						
15	0.5	1	200 / 260	0.01	2	150				PBSS3515M	PBSS3515MB	
20	1	2	300 / 450	0.1	2	125 ²⁾	PBSS5120T					
	2	3	225 / –	0.5	2	80 ²⁾	PBSS5220T					
		5	220 / 420	0.5	2	50	PBSS5320T					
	3.5	8	250 / 400	0.5	2	35	PBSS4021PT					
30	1	1.5	180 / 295	0.5	2	85						PBSS5130QA
		260 / 350	0.5	2		110	PBSS5130T					
	2	3	300 / 450	0.1	2	70	PBSS5230T					
		180 / 295	0.5	2		70						PBSS5230QA
	2.4	5	200 / 320	0.5	2	95	PBSS4032PT ³⁾					
40	0.5	1	200 / 380	0.01	2	220				PBSS3540M	PBSS3540MB	
	1	2	300 / 520	0.1	5	130		PBSS5140U				
			300 / 800	0.1	5	130	PMMT591A					
		3	300 / 510	0.1	5	130	PBSS5140T					
	2	3	300 / –	0.1	2	110 ²⁾			PBSS5240Y			
			300 / 450	0.1	2	70	PBSS5240T					
50	2	3	200 / –	0.5	2	90 ²⁾	PBSS5250T					
		3	200 / –	0.5	2		PBSS5250TH					
	2	5	200 / 360	0.5	2	55	PBSS5350T					
60	1	1.5	120 / 185	0.5	2	125						PBSS5160QA
		2	150 / 250	0.5	5	135		PBSS5160U				
			150 / 250	0.5	5	120	PBSS5160T					
	1.7	2.5	120 / 185	0.5	2	105						PBSS5260QA
	2.7	8	200 / 300	0.5	2	49	PBSS4041PT					
100	1	3	150 / –	0.25	5	93			PBSS9110Y			
			150 / 350	0.5	5	95	PBSS9110T					

¹⁾ $I_C / I_B = 20$ ²⁾ V_{CEsat} (max) ³⁾ Optimized for high-speed switching



Low V_{CEsat} (BISS) transistors double

Package									SOT96 (SO8)	SOT457 (SC-74)	SOT666	DFN2020-6 (SOT1118)	DFN2020D-6 (SOT1118D)
													
Size (mm)									4.8 x 2.5 x 1.5	7.9 x 1.5 x 1.0	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62
P_{tot} (mW)									2000 ²⁾	750	500	1300	1300
V_{CEO} (V)	I_c (A)	Polarity	h_{FE} min/ typ	@ I_c (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); $I_c = 0.5$ A; $I_B = 0.05$ A	V_{CEsat} max (mV)	@ I_c (A)	@ I_B (A)				
15	0.5	2 x NPN	200	0.01	2	170 ¹⁾	250	0.5	0.05			PBSS2515VS	
		2 x PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05			PBSS3515VS	
		NPN / PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05			PBSS2515VPN	
		NPN / PNP	200	0.01	2	170 ¹⁾	250	0.5	0.05				
20	2	NPN / NPN	230	0.5	2	60	90	0.5	0.05				PBSS4220PANS
	2	PNP / PNP	210	0.5	2	70	110	0.5	0.05				PBSS5220PAPS
30	1	NPN / NPN	210	0.5	2	75	100	0.5	0.05				PBSS4130PAN
		PNP / PNP	170	0.5	2	85	140	0.5	0.05				PBSS5130PAP
		NPN / PNP	210 / 170	0.5	2	75 / 85	100 / 140	0.5	0.05				PBSS4130PANP
	2	NPN / NPN	230	0.5	2	60	80	0.5	0.05				PBSS4230PAN
		PNP / PNP	210	0.5	2	75	110	0.5	0.05				PBSS5230PAP
		NPN / PNP	230 / 210	0.5	2	60 / 75	80 / 100	0.5	0.05				PBSS4230PANP
40	1	NPN / PNP	300 / 250	0.5	5	130 / 150	500	1	0.1			PBSS4140DPN	
	2	NPN / PNP	300 / 250	0.5	5	80 / 100	400 / 530	2	0.2			PBSS4240DPN	
50	2.7	2 x NPN	300	0.5	2	50	340	2.7	0.27	PBSS4350SS			
		2 x PNP	200	0.5	2	60	370	2.7	0.27	PBSS5350SS			
		NPN / PNP	300 / 200	0.5	2	50 / 60	340 / 370	2.7	0.27	PBSS4350SPN			
60	1	2 x NPN	200	0.5	5	115	250	1	0.1			PBSS4160DS	
		2 x PNP	150	0.5	5	120	330	1	0.1			PBSS5160DS	
		NPN / PNP	200 / 150	0.5	5	115 / 120	250 / 330	1	0.1			PBSS4160DPN	
	1	NPN / NPN	150	0.5	2	90	120	0.5	0.05				PBSS4160PAN PBSS4160PANS
		PNP / PNP	120	0.5	2	125	180	0.5	0.05				PBSS5160PAP PBSS5160PAPS
		NPN / PNP	150 / 120	0.5	2	90 / 125	120 / 180	0.5	0.05				PBSS4160PANP PBSS4160PANPS
	2	NPN / NPN	210	0.5	2	70	90	0.5	0.05				PBSS4260PAN PBSS4260PANS
		PNP / PNP	140	0.5	2	100	140	0.5	0.05				PBSS5260PAP PBSS5260PAPS
		NPN / PNP	210 / 140	0.5	2	70 / 100	90 / 140	0.5	0.05				PBSS4260PANP PBSS4260PANPS
120	1	NPN / NPN	240	0.1	2	90	120	0.5	0.05				PBSS4112PAN
		PNP / PNP	190	0.1	2	150	220	0.5	0.05				PBSS5112PAP
		NPN / PNP	240 / 190	0.1	2	90 / 150	120 / 220	0.5	0.05				PBSS4112PANP

¹⁾ $I_c / I_b = 20$ ²⁾ Device mounted on a ceramic PCB, Al2O3, standard footprint ³⁾ Optimized for high-speed switching

Low V_{CEsat} (BISS) transistors

Low V_{CEsat} (BISS) transistors load switches

Package				SOT457 (SC-74)	SOT363 (SC-88)
Size (mm)				2.9 x 1.5 x 1.0	2.0 x 1.25 x 0.95
P_{tot} (mW)				750 ¹⁾	600 ¹⁾
V_{CEO} (V)	I_c (A)	V_{CEsat} max (mV); $I_c = 0.5$ A; $I_B = 0.05$ A	R1, R2 (k Ω)		
15	0.5	250	2.2		PBLS1501Y
			4.7		PBLS1502Y
			10		PBLS1503Y
			22		PBLS1504Y
20	1	150	2.2	PBLS2001D	-----
			4.7	PBLS2002D	-----
			10	PBLS2003D	-----
			22	PBLS2004D	-----
40	0.5	350	2.2	PBLS2021D	-----
			4.7	PBLS2022D	-----
			10	PBLS2023D	-----
			22	PBLS2024D	-----
60	1	170	2.2		PBLS4001Y
			4.7		PBLS4002Y
			10		PBLS4003Y
			22		PBLS4004Y
			47		PBLS4005Y
	1.5	100	2.2	PBLS4001D	-----
			4.7	PBLS4002D	-----
			10	PBLS4003D	-----
			22	PBLS4004D	-----
			47	PBLS4005D	-----
			2.2	PBLS6001D	-----
			4.7	PBLS6002D	-----
			10	PBLS6003D	-----
			22	PBLS6004D	-----
			47	PBLS6005D	-----
			2.2	PBLS6021D	-----
			4.7	PBLS6022D	-----
			10	PBLS6023D	-----
			22	PBLS6024D	-----

¹⁾Device mounted on a ceramic PCB, Al₂O₃, standard footprint

²⁾Device mounted on an FR4 PCB, single-sided copper, tin-plated, and standard footprint

Low V_{CEsat} (BISS) high voltage transistorsTypes in **bold** represent new products

Package				SOT223 (SC-73)	SOT89 (SC-62)	SOT1215	SOT23
Size (mm)				6.5 x 3.5 x 1.65	4.5 x 2.5 x 1.5	1.1 x 1.0 x 0.37	2.9 x 1.3 x 1.0
P_{tot} (mW)				1700	1300	750	250
Polarity	V_{CEO} [max] (V)	I_C (A)	hFE [min]				
NPN	150	0.5	0.5	100		PBHV8515QA	
				70			PBHV8115TLH
			1				PBHV8115T
				100	PBHV8115X		
					PBHV8115Z		
		2	100	PBHV8215Z			
	180	1	100				PBHV8118T
	400	0.5	100	PBHV8540Z	PBHV8540X		PBHV8540T
		1	100	PBHV8140Z			
PNP	500	0.15	50				PMBTA45
	600	0.5	70	PBHV8560Z			
	150	140	4	100	PBHV9414Z		
		0.5		100		PBHV9515QA	
				70			PBHV9115TLH
			1				PBHV9115T
				100	PBHV9115X		
					PBHV9115Z		
		2	100	PBHV9215Z			
	400	0.25	100				PBHV9040T
					PBHV9040X		
		0.5	100	PBHV9540Z	PBHV9540X		
	500	0.15	100				PBHV9050T
		0.25	100	PBHV9050Z			
	600	0.1	70	PBHV3160Z			
		0.5	70	PBHV9560Z			

Low V_{CEsat} (BISS) RETs

Package					SOT23	
Size (mm)					2.9 x 1.3 x 1.0	
P_{tot} (mW)					250	
V_{CEO} (V)	I_C (mA)		R1 (k Ω)	R2 (k Ω)	NPN	PNP
40	600	R1 = R2	1	1	PBRN113ET	PBRP113ET
			2.2	2.2	PBRN123ET	PBRP123ET
		R1 ≠ R2	1	10	PBRN113ZT	PBRP113ZT
			2.2	10	PBRN123YT	PBRP123YT

Low V_{CEsat} (BISS) transistors

Low V_{CEsat} (BISS) power transistors single

Types in **bold** represent new products



Package						LFPAK56 (SOT669)
Size (mm)						5 x 6 x 1.1
P_{tot} (mW)						1250
V_{CEO} (V)	I_c (A)	h_{FE} min/typ	@ I_c (A)	@ V_{CE} (V)	Polarity	
40	6	200 / 400	0.5	2	NPN	PHPT60406NY
			0.5	2	PNP	PHPT60406PY
	10	200 / 400	0.5	2	NPN	PHPT60410NY
			0.5	2	PNP	PHPT60410PY
60	15	200 / 400	0.5	2	NPN	PHPT60415NY
			0.5	2	PNP	PHPT60415PY
	3	200 / 400	0.5	2	NPN	PHPT60603NY
			0.5	2	PNP	PHPT60603PY
100	6	200 / 400	0.5	2	NPN	PHPT60606NY
			0.5	2	PNP	PHPT60606PY
	10	150 / 250	0.5	2	NPN	PHPT60610NY
			0.5	2	PNP	PHPT60610PY
100	3	150 / 250	0.5	10	NPN	PHPT61003NY
			0.5	10	PNP	PHPT61003PY
	6	150 / 250	0.5	10	NPN	PHPT61006NY
			0.5	10	PNP	PHPT61006PY
	10	150 / 250	0.5	10	NPN	PHPT61010NY
			0.5	10	PNP	PHPT61010PY

Low V_{CEsat} (BISS) power transistors double



LFPAK56D (SOT1205)

Package											LFPAK56D (SOT1205)
Size (mm)											5 x 6 x 1.1
P_{tot} (mW)											1250
V_{CEO} (V)	I_c (A)	I_{CM} (A)	h_{FE} typ	@ I_c (A)	@ V_{CE} (V)	V_{CEsat} typ (mV); $I_c = 0.5$ A; $I_b = 0.05$ A	V_{CEsat} max (mV)	@ I_c (A)	@ I_b (A)	Polarity	h_{FE1}/h_{FE2}
100	3	6	150	0.5	10	50	300	3	0.2	2XNPN	-
						70	400	3	0.2	2XPNP	-
						50 / 70	300 / 400	3	0.2	NPN/PNP	-
						50	300	3	0.2	2XNPN	0.95
						70	400	3	0.2	2XPNP	0.9

RETs 100 mA single - part 1

Package					SOT23		SOT323 (SC-70)	
								
Size (mm)					2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95	
P_{tot} (mW)					250		200	
V_{CEO} (V)	I_c (mA)	Configuration	R1 (k Ω)	R2 (k Ω)	NPN	PNP	NPN	PNP
50	100	 MSE165	1	1		PDTA113ET		PDTA113EU
			2.2	2.2	PDTA123ET	PDTA123ET	PDTA123EU	PDTA123EU
			4.7	4.7	PDTA143ET	PDTA143ET	PDTA143EU	PDTA143EU
			10	10	PDTA114ET	PDTA114ET	PDTA114EU	PDTA114EU
			22	22	PDTA124ET	PDTA124ET	PDTA124EU	PDTA124EU
			47	47	PDTA144ET	PDTA144ET	PDTA144EU	PDTA144EU
			100	100	PDTA115ET	PDTA115ET	PDTA115EU	PDTA115EU
			1	10	PDTA113ZT		PDTA113ZU	
			2.2	10	PDTA123YT	PDTA123YT	PDTA123YU	PDTA123YU
			4.7	10	PDTA143XT	PDTA143XT	PDTA143XU	PDTA143XU
			4.7	47	PDTA143ZT	PDTA143ZT	PDTA143ZU	PDTA143ZU
			10	47	PDTA114YT	PDTA114YT	PDTA114YU	PDTA114YU
			22	47	PDTA124XT	PDTA124XT	PDTA124XU	PDTA124XU
			47	10	PDTA144VT	PDTA144VT	PDTA144VU	PDTA144VU
			47	22	PDTA144WT	PDTA144WT	PDTA144WU	PDTA144WU
		 MSE167	2.2	-	PDTA123TT	PDTA123TT	PDTA123TU	PDTA123TU
			4.7	-	PDTA143TT	PDTA143TT	PDTA143TU	PDTA143TU
			10	-	PDTA114TT	PDTA114TT	PDTA114TU	PDTA114TU
			22	-	PDTA124TT	PDTA124TT	PDTA124TU	PDTA124TU
			47	-	PDTA144TT	PDTA144TT	PDTA144TU	PDTA144TU
			100	-	PDTA115TT	PDTA115TT	PDTA115TU	PDTA115TU

RETs 100 mA single - part 2

Package					DFN1006-3 (SOT883)		DFN1006B-3 (SOT883B)		SOT1215	
										
Size (mm)					1.0 x 0.6 x 0.48		1.0 x 0.6 x 0.37		1.1 x 1.0 x 0.37	
P_{tot} (mW)					250		250		750	
V_{CEO} (V)	I_c (mA)	Configuration	R1 (k Ω)	R2 (k Ω)	NPN	PNP	NPN	PNP	NPN	PNP
50	100	 MSE165	1	1	PDTA113EM		PDTA113EMB			
			2.2	2.2	PDTA123EM	PDTA123EM	PDTA123EMB	PDTA123EMB		
			4.7	4.7	PDTA143EM	PDTA143EM	PDTA143EMB	PDTA143EMB	PDTA143EQA	PDTA143EQA
			10	10	PDTA114EM	PDTA114EM	PDTA114EMB	PDTA114EMB	PDTA114EQA	PDTA114EQA
			22	22	PDTA124EM	PDTA124EM	PDTA124EMB	PDTA124EMB	PDTA124EQA	PDTA124EQA
			47	47	PDTA144EM	PDTA144EM	PDTA144EMB	PDTA144EMB	PDTA144EQA	PDTA144EQA
			100	100	PDTA115EM	PDTA115EM	PDTA115EMB	PDTA115EMB		
			1	10	PDTA113ZM		PDTA113ZMB			
			2.2	10	PDTA123YM	PDTA123YM	PDTA123YMB	PDTA123YMB		
			2.2	47	PDTA123JM	PDTA123JM	PDTA123JMB	PDTA123JMB	PDTA123JQA	PDTA123JQA
			4.7	10	PDTA143XM	PDTA143XM	PDTA143XMB	PDTA143XMB	PDTA143XQA	PDTA143XQA
			4.7	47	PDTA143ZM	PDTA143ZM	PDTA143ZMB	PDTA143ZMB	PDTA143ZQA	PDTA143ZQA
			10	47	PDTA114YM	PDTA114YM	PDTA114YMB	PDTA114YMB	PDTA114YQA	PDTA114YQA
			22	47	PDTA124XM	PDTA124XM	PDTA124XMB	PDTA124XMB		
			47	10	PDTA144VM	PDTA144VM	PDTA144VMB	PDTA144VMB		
			47	22	PDTA144WM	PDTA144WM	PDTA144WMB	PDTA144WMB		
		 MSE167	2.2	-	PDTA123TM	PDTA123TM	PDTA123TMB	PDTA123TMB		
			4.7	-	PDTA143TM	PDTA143TM	PDTA143TMB	PDTA143TMB		
			10	-	PDTA114TM	PDTA114TM	PDTA114TMB	PDTA114TMB		
			22	-	PDTA124TM	PDTA124TM	PDTA124TMB	PDTA124TMB		
			47	-	PDTA144TM	PDTA144TM	PDTA144TMB	PDTA144TMB		
			100	-	PDTA115TM	PDTA115TM	PDTA115TMB	PDTA115TMB		

Resistor equipped transistors (RETs)

RETs 100 mA double

Types in **bold** represent new products

					DFN1010B-6 (SOT1216)		DFN1412-6 (SOT1268)		SOT363 (SC-88)		SOT666					
Package																
Size (mm)					1.1 x 1.0 x 0.37		1.4 x 1.2 x 0.5		2.0 x 1.25 x 0.95		1.6 x 1.2 x 0.55					
P _{tot} (mW)					350		480		300		300					
V _{CEO} (V)	I _c (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP	NPN / NPN	NPN / PNP	PNP / PNP			
50	100	R1 = R2	2.2	2.2						PUMH20	PUMD20	PUMB20	PEMH20	PEMD20	PEMB20	
			4.7	4.7						PUMH15	PUMD15	PUMB15	PEMH15	PEMD15	PEMB15	
			10	10	PQMH11	PQMD3	PQMB11	PRMH11	PRMD3	PRMB11	PUMH11	PUMD3	PUMB11	PEMH11	PEMD3	PEMB11
			22	22		PQMD2		PRMD2		PUMH1	PUMD2	PUMB1	PEMH1	PEMD2	PEMB1	
			47	47	PQMH2	PQMD12		PRMH2	PRMD12		PUMH2	PUMD12	PUMB2	PEMH2	PEMD12	PEMB2
			100	100						PUMH24	PUMD24	PUMB24	PEMH24	PEMD24	PEMB24	
		R1 ≠ R2	2.2	47	PQMH10	PQMD10		PRMH10	PRMD10		PUMH10	PUMD10	PUMB10	PEMH10	PEMD10	PEMB10
			4.7	10						PUMH18	PUMD18	PUMB18	PEMH18	PEMD18	PEMB18	
			4.7	47	PQMH13	PQMD13		PRMH13	PRMD13		PUMH13	PUMD13	PUMB13	PEMH13	PEMD13	PEMB13
			10	47	PQMH9			PRMH9			PUMH9	PUMD9	PUMB9	PEMH9	PEMD9	PEMB9
			22	47		PQMD16		PRMD16		PUMH16	PUMD16	PUMB16	PEMH16	PEMD16	PEMB16	
			47	22						PUMH17	PUMD17	PUMB17	PEMH17	PEMD17	PEMB17	
		Only R1	47 / 2.2	47 / 47							PUMD48				PEMD48	
			2.2	-						PUMH30	PUMD30	PUMB30	PEMH30	PEMD30	PEMB30	
			4.7	-						PUMH7	PUMD6	PUMB3	PEMH7	PEMD6	PEMB3	
			10	-						PUMH4	PUMD4	PUMB4	PEMH4	PEMD4	PEMB4	
			22	-						PUMH19	PUMD19	PUMB19	PEMH19	PEMD19	PEMB19	
			47	-						PUMH14	PUMD14	PUMB14	PEMH14	PEMD14	PEMB14	

RETs 500mA single / double

					SOT457 (SC-74)		SOT23		SOT323 (SC-70)		SOT1215	
Package												
Size (mm)					2.9 x 1.5 x 1.0		2.9 x 1.3 x 1.0		2.0 x 1.25 x 0.95		1.1 x 1.0 x 0.37	
P _{tot} (mW)					750		250		200		750	
V _{CEO} (V)	I _c (mA)	Configuration	R1 (kΩ)	R2 (kΩ)	NPN / NPN	NPN / PNP	NPN	PNP	NPN	PNP	NPN	PNP
50	500	R1 = R2	1	1			PDTD113ET	PDTB113ET	PDTD113EU	PDTB113EU	PDTD113EQA	PDTB113EQA
			2.2	2.2			PDTD123ET	PDTB123ET	PDTD123EU	PDTB123EU	PDTD123EQA	PDTB123EQA
			4.7	4.7			PDTD143ET	PDTB143ET	PDTD143EU	PDTB143EU	PDTD143EQA	PDTB143EQA
			10	10			PDTD114ET	PDTB114ET	PDTD114EU	PDTB114EU	PDTD114EQA	PDTB114EQA
		R1 ≠ R2	1	10	PIMN31	PIMC31	PDTD113ZT	PDTB113ZT	PDTD113ZU	PDTB113ZU	PDTD113ZQA	PDTB113ZQA
			2.2	10			PDTD123YT	PDTB123YT	PDTD123YU	PDTB123YU	PDTD123YQA	PDTB123YQA
			4.7	10			PDTD143XT	PDTB143XT	PDTD143XU	PDTB143XU	PDTD143XQA	PDTB143XQA
			2.2	-			PDTD123TT	PDTB123TT				
		Only R1	2.2	-								

Type name	Pinning configuration	Tamb(C°)	Vref	Package	Size(mm)	Ptot(mW)	VKA(V)	IK(mA)
TLVH431NCDBZR	Normal pinning	0 to 70	1.5%	1,24	SOT23 	2.9 x 1.3 x 1.0	480	20
TLVH431NIDBZR	Normal pinning	-40 to 85						
TLVH431NQDBZR	Normal pinning	-40 to 125	1%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	100
TLVH431NMQDBZR	Mirrored pinning							
TLVH431NACDBZR	Normal pinning	0 to 70	2%	1,24	SOT23 	2.9 x 1.3 x 1.0	480	80
TLVH431NAIDBZR	Normal pinning	-40 to 85						
TLVH431NAQDBZR	Normal pinning	-40 to 125	1%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	36
TLVH431NAMQDBZR	Mirrored pinning							
TL431CDBZR	Normal pinning	0 to 70	2%	1,24	SOT23 	2.9 x 1.3 x 1.0	480	80
TL431IDBZR	Normal pinning	-40 to 85						
TL431QDBZR	Normal pinning	-40 to 125	1%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	36
TL431FDT	Normal pinning							
TL431MFDT	Mirrored pinning	-40 to 125	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	100
TL431ACDBZR	Normal pinning	0 to 70						
TL431AIDBZR	Normal pinning	-40 to 85	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	36
TL431AQDBZR	Normal pinning	-40 to 125						
TL431AFDT	Normal pinning	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	100	
TL431AMFDT	Mirrored pinning							
TL431BCDBZR	Normal pinning	0 to 70	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	36
TL431BIDBZR	Normal pinning	-40 to 85						
TL431BQDBZR	Normal pinning	-40 to 125	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	100
TL431BFDT	Normal pinning							
TL431BMFDT	Mirrored pinning	-40 to 125	0.5%	2,495	SOT23 	2.9 x 1.3 x 1.0	580	36

Products in **bold red** are under development



Diodes

2

Zener diodes	36
General purpose Zener diodes	36
Zener diodes specifications	37
Zener diodes specifications	37
Switching diodes	38
General purpose, high speed switching diodes <= 90V	38
General purpose, high speed switching diodes 100V	38
General purpose, switching diodes >= 100V.....	39
Controlled avalanche switching diodes.....	40
Low leakage current switching diodes.....	40
PN rectifiers	41
PN rectifiers - Automotive qualified	41
Nomenclature pn-rectifier automotive grade types.....	41
Schottky rectifiers	42
General purpose schottky diodes <= 250 mA.....	42
Low capacitance schottky diodes.....	43
Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages	44
Medium power low VF schottky rectifiers single >= 200 mA	46
Medium power low VF schottky rectifiers single >= 200 mA - leaded packages	47
Medium power low VF schottky rectifiers dual >= 200 mA	48
Nomenclatures	49

General purpose Zener diodes

I _F max (mA)	P _{ZSM} (W)	V _Z nom (V)	V _Z tolerance	Note	Configuration		Series	Package	Size (mm)	P _{tot} (mW)
200	40	2.4~75	B, C	Europe	Dual c.a.		BZB84 series		2.9 x 1.3 x 1.0	250
			A, B, C		Single		BZX84 series			
250	40	2.4~75	B, C	Europe	Single		BZT52 series		2.7 x 1.6 x 1.2	550
200		2.4~36	B	Japan			PDZ-GW series			
250	40	2.4~75	B, C	Europe	Single		BZT52H series	SOD123F		
200	40	10	B2	Japan	Dual isolated		PZU10DB2 series	SOT353 (SC-88A)		2.0 x 1.25 x 0.95
200	30	100	C	Europe	Back-to-back		BZB100A		1.7 x 1.25 x 0.95	300
250	40	2.4~75	B, C	Europe	Single		BZX384 series			
200	40	2.4~36	B, B1, B2, B3	Japan			PZUxBA series			
200	60	100	C	Europe	Single		BZX100A		1.7 x 1.25 x 0.7	550
250	40	2.4~75	B, C	Europe			BZX84J series			
200	40	2.4~75	B, C	Europe	Single		BZX585 series	SOD523 (SC-79)		1.2 x 0.8 x 0.6
200	40	2.4~75	B, C	Europe	Single		BZX884 series		1.0 x 0.6 x 0.48	250
			2.4~36	Japan			PZUxBL series			
250	40	2.4~30	B	Europe	Single		TDZxJ series	SOD323F		1.7 x 1.25 x 0.7


Notes:

Japan: B selection: app. 5% V_Z tolerance, B1, B2, B3 selections: app. 2% V_Z tolerance in sequential intervals
 Europe: A selection: app. 1% V_Z tolerance, B selection: app. 2% V_Z tolerance, C selection: app. 5% V_Z tolerance; the selections are in overlapping intervals

Ave: low-voltage avalanche regulator diodes
 Dual c.a.: dual common anode

Zener diodes specifications

Differences in Zener specifications

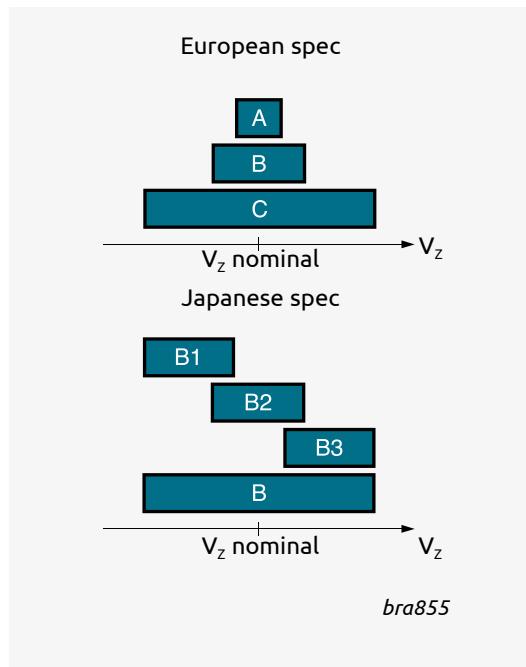

Japanese spec (PZU, PDZ)

y =	B-series	B1-series	B2-series	B3-series
	$\pm 5\%$	$\pm 2\%$	$\pm 2\%$	$\pm 2\%$
	V_z (V)	V_z (V)	V_z (V)	V_z (V)
PZU2.4y	2.3 - 2.6	-	-	-
PZU2.7y	2.5 - 2.9	2.5 - 2.75	2.65 - 2.9	-
PZU3.0y	2.8 - 3.2	2.8 - 3.05	2.95 - 3.2	-
PZU3.3y	3.1 - 3.5	3.1 - 3.35	3.25 - 3.5	-
PZU3.6y	3.4 - 3.8	3.4 - 3.65	3.55 - 3.8	-
PZU3.9y	3.7 - 4.1	3.7 - 3.97	3.87 - 4.1	-
PZU4.3y	4.01 - 4.48	4.01 - 4.21	4.15 - 4.34	4.28 - 4.48
PZU4.7y	4.42 - 4.9	4.42 - 4.61	4.55 - 4.75	4.69 - 4.9
PZU5.1y	4.84 - 5.37	4.84 - 5.04	4.98 - 5.2	5.14 - 5.37
PZU5.6y	5.31 - 5.92	5.31 - 5.55	5.49 - 5.73	5.67 - 5.92
PZU6.2y	5.86 - 6.53	5.86 - 6.12	6.06 - 6.33	6.26 - 6.53
PZU6.8y	6.47 - 7.14	6.47 - 6.73	6.65 - 6.93	6.86 - 7.14
PZU7.5y	7.06 - 7.84	7.06 - 7.36	7.28 - 7.6	7.52 - 7.84
PZU8.2y	7.76 - 8.64	7.76 - 8.1	8.02 - 8.36	8.28 - 8.64
PZU9.1y	8.56 - 9.55	8.56 - 8.93	8.85 - 9.23	9.15 - 9.55
PZU10y	9.45 - 10.55	9.45 - 9.87	9.77 - 10.21	10.11 - 10.55
PZU11y	10.44 - 11.56	10.44 - 10.88	10.76 - 11.22	11.1 - 11.56
PZU12y	11.42 - 12.6	11.42 - 11.9	11.74 - 12.24	12.08 - 12.6
PZU13y	12.47 - 13.96	12.47 - 13.03	12.91 - 13.49	13.37 - 13.96
PZU14y	-	-	13.7 - 14.3	-
PZU15y	13.84 - 15.52	13.84 - 14.46	14.34 - 14.98	14.85 - 15.52
PZU16y	15.37 - 17.09	15.37 - 16.01	15.85 - 16.51	16.35 - 17.09
PZU18y	16.94 - 19.03	16.94 - 17.7	17.56 - 18.35	18.21 - 19.03
PZU20y	18.86 - 21.08	18.86 - 19.7	19.52 - 20.39	20.21 - 21.08
PZU22y	20.88 - 23.17	20.88 - 21.77	21.54 - 22.47	22.23 - 23.17
PZU24y	22.93 - 25.57	22.93 - 23.96	23.72 - 24.78	24.54 - 25.57
PZU27y	25.1 - 28.9	-	-	-
PZU30y	28 - 32	-	-	-
PZU33y	31 - 35	-	-	-
PZU36y	34 - 38	-	-	-

European spec (BZV, BZX, BZB, 1N47)

y =	C-series	B-series	A-series
	$\pm 5\%$	$\pm 2\%$	$\pm 1\%$
	V_z (V)	V_z (V)	V_z (V)
BZX84-y2V4	2.2 - 2.6	2.35 - 2.45	2.37 - 2.43
BZX84-y2V7	2.5 - 2.9	2.65 - 2.75	2.67 - 2.73
BZX84-y3V0	2.8 - 3.2	2.94 - 3.06	2.97 - 3.03
BZX84-y3V3	3.1 - 3.5	3.23 - 3.37	3.26 - 3.34
BZX84-y3V6	3.4 - 3.8	3.53 - 3.67	3.56 - 3.64
BZX84-y3V9	3.7 - 4.1	3.82 - 3.98	3.86 - 3.94
BZX84-y4V3	4 - 4.6	4.21 - 4.39	4.25 - 4.35
BZX84-y4V7	4.4 - 5	4.61 - 4.79	4.65 - 4.75
BZX84-y5V1	4.8 - 5.4	5 - 5.2	5.04 - 5.16
BZX84-y5V6	5.2 - 6	5.49 - 5.71	5.54 - 5.66
BZX84-y6V2	5.8 - 6.6	6.08 - 6.32	6.13 - 6.27
BZX84-y6V8	6.4 - 7.2	6.66 - 6.94	6.73 - 6.87
BZX84-y7V5	7 - 7.9	7.35 - 7.65	7.42 - 7.58
BZX84-y8V2	7.7 - 8.7	8.04 - 8.36	8.11 - 8.29
BZX84-y9V1	8.5 - 9.6	8.92 - 9.28	9 - 9.2
BZX84-y10	9.4 - 10.6	9.8 - 10.2	9.9 - 10.1
BZX84-y11	10.4 - 11.6	10.8 - 11.2	10.8 - 11.11
BZX84-y12	11.4 - 12.7	11.8 - 12.2	11.88 - 12.12
BZX84-y13	12.4 - 14.1	12.7 - 13.3	12.87 - 13.13
BZX84-y15	13.8 - 15.6	14.7 - 15.3	14.85 - 15.15
BZX84-y16	15.3 - 17.1	15.7 - 16.3	15.84 - 16.16
BZX84-y18	16.8 - 19.1	17.6 - 18.4	17.82 - 18.18
BZX84-y20	18.8 - 21.2	19.6 - 20.4	19.8 - 20.2
BZX84-y22	20.8 - 23.3	21.6 - 22.4	21.78 - 22.22
BZX84-y24	22.8 - 25.6	23.5 - 24.5	23.76 - 24.24
BZX84-y27	25.1 - 28.9	26.5 - 27.5	26.73 - 27.27
BZX84-y30	28 - 32	29.4 - 30.6	29.70 - 30.30
BZX84-y33	31 - 35	32.3 - 33.7	32.67 - 33.33
BZX84-y36	34 - 38	35.3 - 36.7	35.64 - 36.36
BZX84-y39	37 - 41	38.2 - 39.8	38.61 - 39.39
BZX84-y43	40 - 46	42.1 - 43.9	42.57 - 43.43
BZX84-y47	44 - 50	46.1 - 47.9	-
BZX84-y51	48 - 54	50 - 52	50.49 - 51.51
BZX84-y56	52 - 60	54.9 - 57.1	-
BZX84-y62	58 - 66	60.8 - 63.2	-
BZX84-y68	64 - 72	66.6 - 69.4	-
BZX84-y75	70 - 79	73.5 - 76.5	74.25 - 75.75

NZX-series in SOD27

	V_z (V)		V_z (V)		V_z (V)	
NZX2V1B	2.0 - 2.2		NZX6V2D	6.1 - 6.4	NZX14C	13.8 - 14.3
NZX2V4A	2.3 - 2.5		NZX6V2E	6.3 - 6.6	NZX15A	14.1 - 14.7
NZX2V4B	2.4 - 2.6		NZX6V8A	6.4 - 6.7	NZX15B	14.5 - 15.1
NZX2V7A	2.5 - 2.7		NZX6V8B	6.6 - 6.9	NZX15C	14.9 - 15.5
NZX2V7B	2.6 - 2.8		NZX6V8C	6.7 - 7	NZX15X	14.35 - 15.09
NZX2V7C	2.7 - 2.9		NZX6V8D	6.9 - 7.2	NZX16A	15.3 - 15.9
NZX3V0A	2.8 - 3		NZX7V5A	7 - 7.3	NZX16B	15.7 - 16.5
NZX3V0B	2.9 - 3.1		NZX7V5B	7.2 - 7.6	NZX16C	16.3 - 17.1
NZX3V0C	3 - 3.2		NZX7V5C	7.3 - 7.7	NZX18A	16.9 - 17.7
NZX3V3A	3.1 - 3.3		NZX7V5D	7.5 - 7.9	NZX18B	17.5 - 18.3
NZX3V3B	3.2 - 3.4		NZX7V5X	7.07 - 7.45	NZX18C	18.1 - 19
NZX3V3C	3.3 - 3.5		NZX8V2A	7.7 - 8.1	NZX20A	18.8 - 19.7
NZX3V6A	3.4 - 3.6		NZX8V2B	7.9 - 8.3	NZX20B	19.5 - 20.4
NZX3V6B	3.5 - 3.7		NZX8V2C	8.1 - 8.5	NZX20C	20.2 - 21.2
NZX3V6C	3.6 - 3.8		NZX8V2D	8.3 - 8.7	NZX22A	20.9 - 21.9
NZX3V9A	3.7 - 3.9		NZX9V1A	8.5 - 8.9	NZX22B	21.6 - 22.6
NZX3V9B	3.8 - 4		NZX9V1B	8.7 - 9.1	NZX22C	22.3 - 23.3
NZX3V9C	3.9 - 4.1		NZX9V1C	8.9 - 9.3	NZX24A	22.9 - 24
NZX4V3A	4 - 4.2		NZX9V1D	9.1 - 9.5	NZX24B	23.6 - 24.7
NZX4V3B	4.1 - 4.3		NZX9V1E	9.3 - 9.7	NZX24C	24.3 - 25.5
NZX4V3C	4.2 - 4.4		NZX10A	9.5 - 9.9	NZX24X	22.61 - 23.77
NZX4V3D	4.3 - 4.5		NZX10B	9.7 - 10.1	NZX27A	25.2 - 26.6
NZX4V7A	4.4 - 4.6		NZX10C	9.9 - 10.3	NZX27B	26.2 - 27.6
NZX4V7B	4.5 - 4.7		NZX10D	10.2 - 10.6	NZX27C	27.2 - 28.6
NZX4V7C	4.6 - 4.8		NZX11A	10.4 - 10.8	NZX27X	26.99 - 28.39
NZX4V7D	4.7 - 4.9		NZX11B	10.7 - 11.1	NZX30A	28.2 - 29.6
NZX5V1A	4.8 - 5		NZX11C	10.9 - 11.3	NZX30B	29.2 - 30.6
NZX5V1B	4.9 - 5.1		NZX11D	11.1 - 11.6	NZX30C	30.2 - 31.6
NZX5V1C	5 - 5.2		NZX12A	11.4 - 11.9	NZX30X	29.02 - 30.51
NZX5V1D	5.1 - 5.3		NZX12B	11.6 - 12.1	NZX33A	31.2 - 32.6
NZX5V6A	5.2 - 5.5		NZX12C	11.9 - 12.4	NZX33B	32.2 - 33.6
NZX5V6B	5.3 - 5.6		NZX12D	12.2 - 12.7	NZX33C	33.2 - 34.5
NZX5V6C	5.4 - 5.7		NZX12X	11.44 - 12.03	NZX36A	34.2 - 35.7
NZX5V6D	5.5 - 5.8		NZX13A	12.4 - 12.9	NZX36B	35.3 - 36.8
NZX5V6E	5.6 - 5.9		NZX13B	12.6 - 13.1	NZX36C	36.4 - 38
NZX6V2A	5.7 - 6		NZX13C	12.9 - 13.4	NZX36X	35.36 - 37.19
NZX6V2B	5.8 - 6.1		NZX14A	13.2 - 13.7		
NZX6V2C	6 - 6.3		NZX14B	13.5 - 14		

Switching diodes

General purpose, high speed switching diodes <= 90V

V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA)	@ V _R (V)	t _{tr} max (ns)	Package	SOT23	SOT143B	SOT323 (SC-70)	SOT363 (SC-88)	DFN1412-6 (SOT1268)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)
							Size (mm)	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.4 x 1.2 x 0.5	1.1 x 1.0 x 0.37
50	1	50	100	50	4		250	250	200	350	480	325	250
							BAL74						
70	1	50	1000	70	4		BAV74						
							BAV99						
75	1	50	1000	75	4		BAS28						
80	1	50	500	80	4		1PS300						
							1PS301						
							1PS302						
90	1	50	500	80	4		BAW56						
							BAW56W						
90	1	50	500	80	4		BAW56S						
							BAW56RA						
90	1	50	500	80	4		BAV756S						

General purpose, high speed switching diodes 100V

V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA)	@ V _R (V)	t _{tr} max (ns)	Package	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOD323F (SC-90)	SOT666	DFN1412-6 (SOT1268)	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-2 (SOD882)	DFN1006-3 (SOT883)	DFN1006D-2 (SOD882D)	
							Size (mm)	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.1 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.6 x 1.2 x 0.55	1.1 x 1.2 x 0.5	1.2 x 0.8 x 0.6	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.37	
100	1	50	500	80	4		BAS16GW	BAS16H			BAS316	BAS16J				BAS516		BAS16L		BAS16LD	
							BAS16													BAS16QA	
100	1	50	500	80	4		BAV70				BAV70W									BAV70M	
											BAV70S										BAV70QA
											BAV99W										BAV99QA
100	1	50	500	80	4						BAV99S										



General purpose, switching diodes >= 100V

Types in **bold** represent new products

V_r max (V)	V_f max (V)	I_f max (mA) @ V_r (V)	I_f max (mA) @ V_f (V)	t_{tr} max (ns)	Package	SOT457 (SC-74)	SOT23	SOT143B	SOD123	SOD123F	SOT323 (SC-70)	SOT353 (SC-88A)	SOT363 (SC-88)	SOD323	SOD323F (SC-90)	SOD523 (SC-79)	DFN1006D-2 (SOD882(D))				
						Size (mm)	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48 (1.0 x 0.6 x 0.37)		
						P_{tot} (mW)	250	250	250	380	375	200	255	300	300	300	250	250			
100	1	100	100	100	50			BAS19													
150	1	100	100	150	50																
								BAS20													
									BAS21GW	BAS21H				BAS321	BAS321J		BAS21LL BAS21LD				
								BAS21			BAS21W										
									BAV23												
												BAS21PG									
								BAV23A				BAS21AW									
									BAV23C												
									BAV23S			BAS21SW									
								BA-S21AVD													
								BA21VD													
															BAS21J	BAS521					
								BAS101													
									BAS101S												
										BAW101											
															BAW101S						
≥200	1	100	100	200	50																
300	1.1	100	150	250	50																

Switching diodes

Controlled avalanche switching diodes



								Package	SOT23	SOT143B
V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA) @ V _R max	I _{FSM} max (A)	I _{FRM} max (mA)	C _d max (pF)	t _{tr} max (ns)		2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0
P _{tot} (mW)									250	250
60	1	200	100	9	600	2.5	6			
90	1	200	100	10	600	35	50		BAS29	
									BAS31	
									BAS35	
										BAS56

Low leakage current switching diodes


V _R max (V)	V _F max (V)	@ I _F (mA)	I _R max (nA) @ V _R max	t _{tr} max (μs)	Package	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOD323 (SC-76)	SOD523 (SC-79)	DFN1010D-3 (SOT1215)	DFN1006-3 (SOT883)	DFN1006-2 (SOD882)	
															
						Size (mm)	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.2 x 0.8 x 0.6	1.1 x 1.0 x 0.37	1.0 x 0.6 x 0.48	1.0 x 0.6 x 0.48
75	1	10	5	3	  		BAS116GW	BAS116H		BAS416	BAS716				BAS116L
						BAS116						BAS116QA			
						BAV199			BAV199W						
						BAW156									
						BAV170						BAV170QA	BAV170M		

PN rectifiers - Automotive qualified

Types in **bold** represent new products

V_R max (V)	V_F max (V)	(@) I_F (A)	I_R max (μ A)	(@) V_R (V)	t_{rr} max (ns)	Package	CFP5 (SOD128)	CFP3 (SOD123W)
							Size (mm)	3.8 x 2.5 x 1.0
200	0.93	1	0.2	200	25	  bra036		PNE20010ER
	0.98	2	0.2	200	25			PNE20020ER
	0.95	2	0.2	200	25		PNE20020EP	
	0.98	3	0.2	200	30		PNE20030EP	
400	1.1	1	1	400	1800			PNS40010ER


Nomenclature pn-rectifier automotive grade types

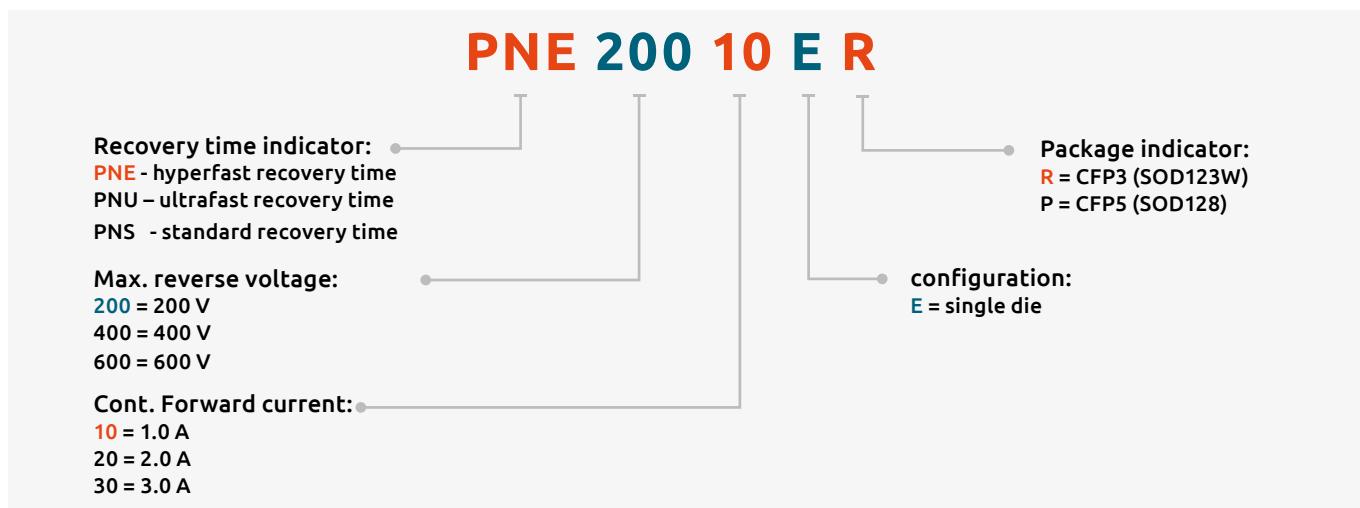

Schottky rectifiers

General purpose schottky diodes <= 250 mA

IF max (mA)	VR max (V)	VF max (mV)	@ IF (mA)	IR max (μ A)	@ VR (V)	Package	SOT23	SOT143B	SOD123	SOD123F
										
							Size (mm)	2.9 x 1.3 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2
70	70	750	10	0.1	50	P _{tot} (mW)	250	250	357	375
							Single	BAS70		BAS70H
							Dual series	BAS70-04		
							Dual c.c.	BAS70-05		
							Dual c.a.	BAS70-06		
							Dual isolated		BAS70-07	
							Triple isolated			
							Quad 2x series			
120	40	370	1	0.5	30	Single				
							Single	BAS40		BAS40H
							Dual series	BAS40-04		
							Dual c.c.	BAS40-05		
							Dual c.a.	BAS40-06		
							Dual isolated		BAS40-07	
							Quad c.c./c.c.			
							Quad 2x series			
200	30	300	10	30	10	Single				
							Single	BAT754		
							Dual series	BAT754S		
							Dual c.c.	BAT754C		
							Dual c.a.	BAT754A		
		400	10	2	25	Triple isolated				
							Single	BAT54		BAT54GW
							Dual series	BAT54S		BAT54H
							Dual c.c.	BAT54C		
							Dual c.a.	BAT54A		
		500	200	30	10	Dual isolated			BAT74	
							Triple isolated			
							Quad c.c./c.c.			
							Quad 2x series			
							Single			
250	40	600	200	1	10	Single				
							Single			
							Single	BAT721		
							Dual series	BAT721S		
		360	10	0.5	25	Dual c.c.	Dual c.c.	BAT721C		
							Dual c.a.	BAT721A		
							Single			
							Single			
250	100	850	250	4	75	Dual series				
							Single		BAT46GW	BAT46WH

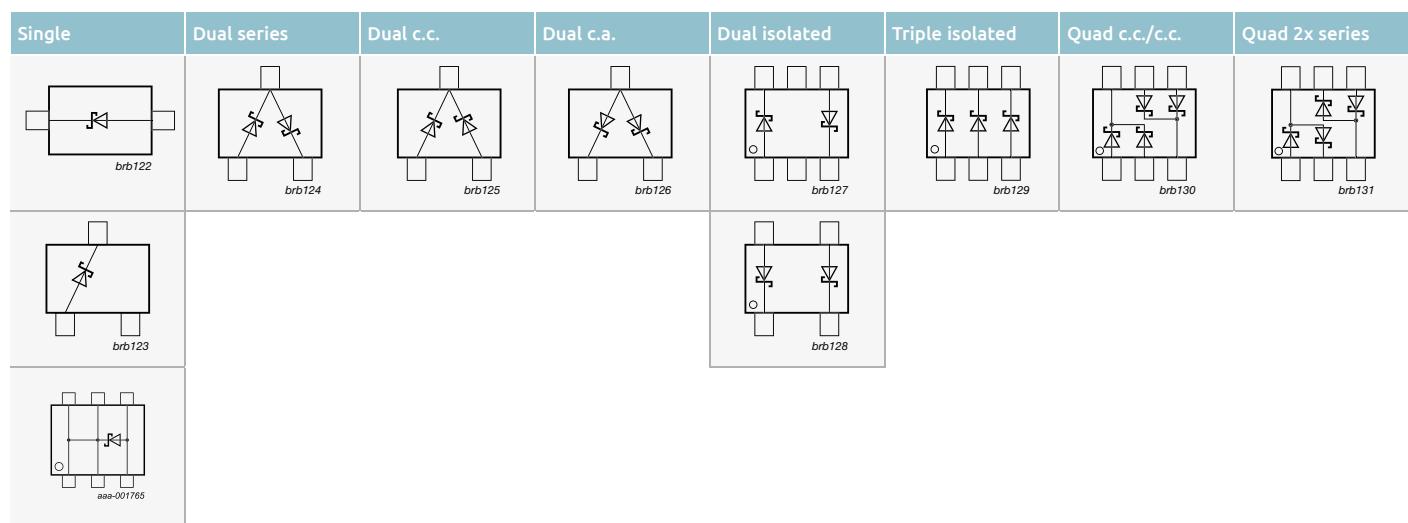

	SOT323 (SC-70)	SOT363 (SC-88)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)/ DFN1006-3 (SOT883)
2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.7 x 1.2 x 0.55	1.2 x 0.8 x 0.6	1.0 x 0.6 x 0.48	
250	300	385	400	300	275	250	
BAS70W			1PS76SB70		1PS79SB70		BAS70L
BAS70-04W							
BAS70-05W							
BAS70-06W							
BAS70-07S				BAS70-07V BAS70VV			
BAS70XY				RB751V40 1PS76SB40	RB751S40 1PS79SB40	RB751CS40 BAS40L	
BAS40W							
BAS40-04W							
BAS40-05W							
BAS40-06W							
1PS88SB48					BAS40-07V BAS40-05V		
BAS40XY						1PS79SB31	
BAT754L							
BAT54W		BAT54J	1PS76SB10		1PS79SB10		BAT54L
BAT54SW							
BAT54CW							BAT54CM
BAT54AW							
BAT74S				BAT74V BAT54VV BAT54CV			
BAT54XY						RB521S30 RB520S30	RB521CS30L RB520CS30L
			1PS76SB21				
BAT854W					1PS79SB30		
BAT854SW							
BAT854CW							
BAT854AW							
BAT46WJ							

Low capacitance schottky diodes

I_F max (mA)	V_R max (V)	ΔV_F max (mV) @ I_F (mA)	C_d max (pF) @ $V_R = 0$ V	Package	SOT23	SOT323 (SC-70)	SOT363 (SC-88)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)	DFN1006-2 (SOD882)
					Size (mm)	2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6
30	4	450	1	P _{tot} (mW)	250	250	300	400	300	500	250
				Single	BAT17			1PS76SB17		1PS79SB17	
				Triple isolated					1PS66SB17		
	15	340	1	Dual series	PMBD353 PMBD354 ¹⁾						
				Single		1PS70SB82					1PS10SB82
				Triple isolated			1PS88SB82		1PS66SB82		
				Dual series		1PS70SB84					
				Dual c.c.		1PS70SB85					
				Dual c.a.		1PS70SB86					

¹⁾ Diodes have matched capacitance

Schottky rectifiers

Medium power low VF schottky rectifiers single >= 200 mA - leadless DSN / DFN packages

I _F max (A)	V _R max (V)	V _F max (mV) @ I _F max	I _R max (mA) @ V _R max	Package	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	DFN1608D-2 (SOD1608)	
								
				Size (mm)	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.62	1.8 x 0.8 x 0.57	
				P _{tot} (mW) @ 1 cm ²	960	960	780	
0.2	20	420	0.045	Low V _F				
		490	0.0035	Low I _R				
	30	470	0.08	Low V _F				
		480	0.05	low V _F				
		535	0.009	Low I _R				
	40	525	0.08	Low V _F				
		600	0.0065	Low I _R				
		600	0.01	low I _R				
	60	600	0.1	low V _F				
0.5	20	390	0.2	low V _F				
		410	0.3	low V _F				PMEG2005EPK
		440	1.5	low V _F				
		500	0.03	low I _R				
		550	0.045	Low V _F				
		620	0.0035	Low I _R				
	30	500	0.5	low V _F				
		630	0.08	Low V _F				
		720	0.009	Low I _R				
	40	590	0.01	low I _R				PMEG4005EPK
		820	0.08	Low V _F				
		880	0.0065	Low I _R				
1	20	375	1.9	low V _F	PMEG2010EPA	PMEG2010EPAS		
		415	0.6	low V _F				PMEG2010EPK
		490	0.2	low V _F				
	30	480	1.25	Low V _F				
		565	0.045	Low I _R				
	40	505	0.115	Low V _F				
		600	0.02	low I _R				PMEG4010EPK
		610	0.04	Low I _R				
	60	625	0.65	Low V _F				
		730	0.03	Low I _R				
1.5	20	420	0.9	low V _F				PMEG2015EPK
	40	610	0.03	low I _R				PMEG4015EPK
2	20	420	1.9	low V _F	PMEG2020EPA	PMEG2020EPAS		
		450	0.9	low V _F				PMEG2020EPK
	30	470	2.5	low V _F	PMEG3020EPA	PMEG3020EPAS		
	40	535	0.1	low V _F	PMEG4020EPA	PMEG4020EPAS		
	60	530	0.2	low V _F				PMEG4020EPK
		575	0.25	low V _F	PMEG6020EPA	PMEG6020EPAS		

Schottky rectifiers

Medium power low VF schottky rectifiers single >= 200 mA

Types in **bold** represent new products

I _F max (A)	V _R max (V)	V _F max (mV) @ I _F max	I _R max (mA) @ V _R max	Package	CFP15 (SOT1289)	CFP5 (SOD128)	CFP3 (SOD123W)
							
					Size (mm)	5.8 x 4.3 x 0.78	3.8 x 2.5 x 1.0
					P _{tot} (mW) @ 1 cm ²	2150	1050
1	20	340	1	Low V _F			PMEG2010ER
		450	0.05	Low I _R			PMEG2010BER
	30	360	1.5	Low V _F			PMEG3010EP
		450	0.05	Low I _R			PMEG3010BEP
	40	490	0.05	Low V _F			PMEG4010EP
		460	0.022	Low V _F /Low I _R			PMEG4010ETR
		530	0.06	Low V _F		PMEG6010EP	PMEG6010ER
		660	0.0003	Low I _R			PMEG6010ELR
	100	770	0.00015	Low I _R			PMEG10010ELR
2	30	360	3	Low V _F		PMEG3020EP	
		420	1.5	Low V _F		PMEG3020CEP	PMEG3020ER
		450	0.1	Low I _R		PMEG3020BEP	
		520	0.05	Low I _R		PMEG3020DEP	PMEG3020BER
	40	490	0.1	Low V _F		PMEG4020EP	PMEG4020ER
		515	0.022	Low V _F /Low I _R		PMEG4020ETP	PMEG4020ETR
		530	0.2	Low V _F		PMEG6020EP	PMEG6020ER
		620	0.0012	Low V _F /Low I _R		PMEG6020ETP	PMEG6020ETR
	60	680	0.0007	Low I _R		PMEG6020AELP	PMEG6020AELR
		760	0.0003	Low I _R			PMEG6020ELR
		770	0.0003	Low I _R		PMEG10020AELP	PMEG10020AELR
		830	0.00015	Low I _R			PMEG10020ELR
3	30	360	5	Low V _F		PMEG3030EP	
		450	0.15	Low I _R	PMEG030V030EPD	PMEG3030BEP	
		490	0.12	Low V _F	PMEG040V030EPD		
		525	0.2	Low V _F		PMEG4030EP	
	40	525	0.028	Low V _F /Low I _R		PMEG4030ETP	
		540	0.1	Low I _R		PMEG40T30EP¹⁾	PMEG40T30ER¹⁾
		45	0.044	Low VF/Low IR	PMEG045T030EPD		PMEG4030ER
		50	0.1	Low V _F	PMEG050V030EPD		
	60	475	0.4	Low V _F		PMEG6030EVP	
		530	0.2	Low V _F	PMEG600V030EPD	PMEG6030EP	
		690	0.001	Low I _R		PMEG6030ELP	
		100	0.00045	Low I _R		PMEG10030ELP	
4.5	60	530	0.4	Low V _F		PMEG6045ETP	
5	30	360	8	Low V _F		PMEG3050EP	
		450	0.25	Low I _R		PMEG3050BEP	
		500	0.15	Low V _F	PMEG030V050EPD		
	40	490	0.3	Low V _F		PMEG4050EP	
		520	0.3	Low V _F		PMEG4050ETP	
		525	0.041	Low V _F /Low I _R		PMEG40T50EP¹⁾	
		45	0.3	Low V _F	PMEG045V050EPD		
	45	525	0.044	Low VF/Low IR	PMEG045T050EPD		
		60	0.4	Low V _F	PMEG060V050EPD		
		560	0.0045	Low I _R		PMEG10050ELP	
6	100	840	0.00045	Low I _R		PMEG100V060ELPD	
8	100	850	0.0005	Low I _R		PMEG100V080ELPD	
10	45	490	0.6	Low V _F		PMEG045V100EPD	
		545	0.08	Low V _F /Low I _R	PMEG045T100EPD¹⁾		
		60	0.7	Low V _F	PMEG060V100EPD		
	100	850	0.0008	Low I _R		PMEG100V100ELPD	
15	45	490	1	Low V _F		PMEG045V150EPD	
		550	0.1	Low V _F /Low I _R	PMEG045T150EPD¹⁾		
		570	0.098	Low VF/Low IR	PMEG045T150EPD		
	50	500	1	Low V _F	PMEG050V150EPD		
		550	0.1	Low I _R	PMEG050T150EPD ¹⁾		

¹⁾ Trench process

Medium power low VF schottky rectifiers single $\geq 200 \text{ mA}$ - leaded packages


I_F max (A)	V_R max (V)	V_F max (mV) @ I_F max	I_R max (mA) @ V_R max	Package	SOT457 (SC-74)	SOT23	SOD123	SOD123F	SOT323 (SC-70)	SOD323F (SC-90)	SOD323 (SC-76)	SOT666	SOD523 (SC-79)		
															
				Size (mm)	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.7 x 1.6 x 1.2	2.6 x 1.6 x 1.1	2.0 x 1.25 x 0.95	1.7 x 1.25 x 0.7	1.7 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.2 x 0.8 x 0.6		
				P_{tot} (mW) @ 1 cm ²	540	420	660	830	400	830	570	570	500		
0.2	30	480	0.05	Low V_f										PMEG3002EJ	PMEG3002AEB
	40	600	0.01	Low I_r										PMEG4002EJ	PMEG4002EB
	60	600	0.1	Low V_f										PMEG6002EJ	PMEG6002EB
0.5	20	390	0.2	Low V_f		PMEG2005ET	PMEG2005EGW	PMEG2005EH		PMEG2005EJ	PMEG2005AEA	PMEG2005AEV			
		480	0.03	Low I_r											PMEG2005EB
	30	430	0.15	Low V_f		PMEG3005ET	PMEG3005EGW	PMEG3005EH		PMEG3005EJ	PMEG3005AEA	PMEG3005AEV			
		500	0.5	Low V_f											PMEG3005EB
0.75	40	470	0.1	Low V_f		PMEG4005ET	PMEG4005EGW	PMEG4005EH		PMEG4005EJ	PMEG4005AEA	PMEG4005AEV			
		550	1.1	Low V_f	BAT720				1PS70SB20						
		640	0.008	Low I_r						PMEG4005CEJ	PMEG4005CEA				
	40	740	0.008	Low I_r								BAT165A			
1	20	430	0.2	Low V_f		PMEG2010AET		PMEG2010AEH							
		500	0.2	Low V_f		PMEG2010ET		PMEG2010EH		PMEG2010EJ	PMEG2010BEA	PMEG2010BEV			
		550	0.07	Low I_r						PMEG2010AEJ	PMEG2010EA BAT760	PMEG2010EV BAT960			
		620	1.5	Low V_f											PMEG2010AEB
1	30	450	1	Low V_f	1PS74SB23										
		520	0.1	Low I_r				PMEG3010CEH		PMEG3010CEJ					
		560	0.15	Low V_f	PMEG3010ET	PMEG3010EGW	PMEG3010EH		PMEG3010EJ	PMEG3010BEA	PMEG3010BEV				
		680	0.5	Low V_f											PMEG3010EB
1	40	570	0.05	Low I_r			PMEG4010CEGW	PMEG4010CEH		PMEG4010CEJ					
		640	0.05	Low V_f	PMEG4010ET	PMEG4010EGW	PMEG4010EH		PMEG4010EJ	PMEG4010BEA	PMEG4010BEV				
		840	0.008	Low I_r							PMEG4010CEA				
		660	0.05	Low I_r		PMEG6010CEGW	PMEG6010CEH		PMEG6010CEJ						
1.5	20	660	0.2	Low I_r				PMEG2015EH		PMEG2015EJ	PMEG2015EA	PMEG2015EV			
	30	500	1	Low V_f				PMEG3015EH		PMEG3015EJ		PMEG3015EV			
2	10	460	3	Low V_f				PMEG1020EH		PMEG1020EJ	PMEG1020EA	PMEG1020EV			
	20	525	0.2	Low V_f				PMEG2020EH		PMEG2020EJ	PMEG2020AEA				
	30	620	1	Low V_f		PMEG3020EGW	PMEG3020EH		PMEG3020EJ						
3	10	530	3	Low V_f				PMEG1030EH		PMEG1030EJ					

Schottky rectifiers


Medium power low VF schottky rectifiers dual >= 200 mA

I _F max (A)	V _R max (V)	V _F max (mV) @ I _F max	I _R max (mA) @ V _R max	Optimization	Package	SOT223 (SC-73)	SOT23	DFN2020-3 (SOT1061)	DFN2020D-3 (SOT1061D)	SOT666	
											
						Size (mm)	6.5 x 3.5 x 1.65	2.9 x 1.3 x 1.0	2.0 x 2.0 x 0.62	2.0 x 2.0 x 0.63	1.6 x 1.2 x 0.55
0.2	30	480	0.03	Low V _f		P _{tot} (mW) @ 1 cm ²	1500	400	1000	1000	400
	60	600	0.1								PMEG6002TV
0.5	20	390	0.2	Low V _f				PMEG2005CT			
	30	430	0.15					PMEG3005CT			
	40	470	0.1					PMEG4005CT			
1.0	25	450	1.0	Low V _f		BAT120S					
						BAT120C					
						BAT120A					
	40	500	0.05	Low V _f					PMEG4010CPA	PMEG4010CPAS	
									PMEG6010CPA	PMEG6010CPAS	
						BAT160S					
	60	650	0.35	Low V _f		BAT160C					
						BAT160A					
									PMEG2020CPA	PMEG2020CPAS	
2.0	20	420	1.0	Low V _f							
	30	440	2.0						PMEG3020CPA	PMEG3020CPAS	

Nomenclature of automotive grade Schottky rectifier in medium-power packages

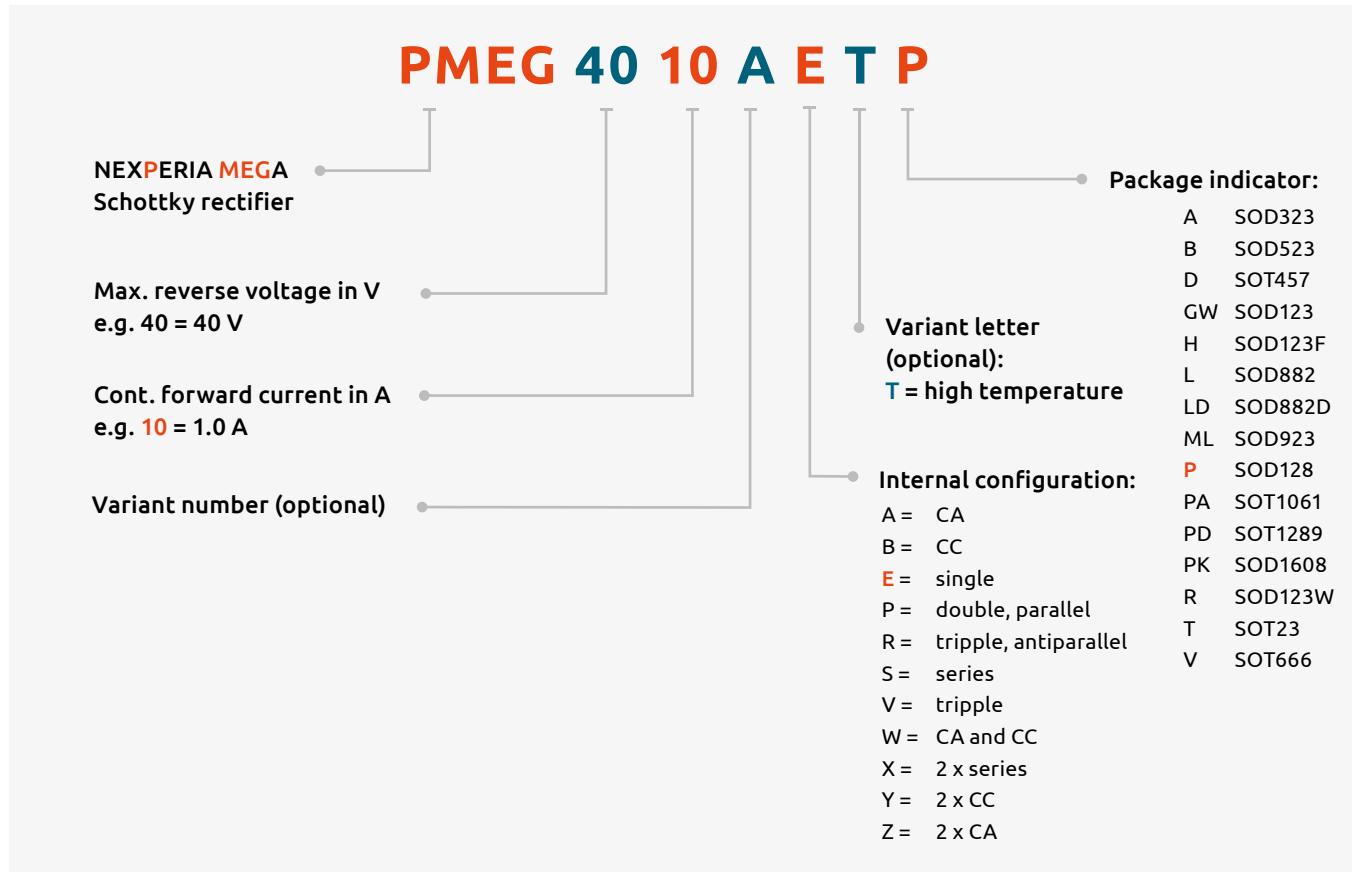

Nomenclature of automotive grade Schottky rectifier in CFP15 (SOT1289) power package

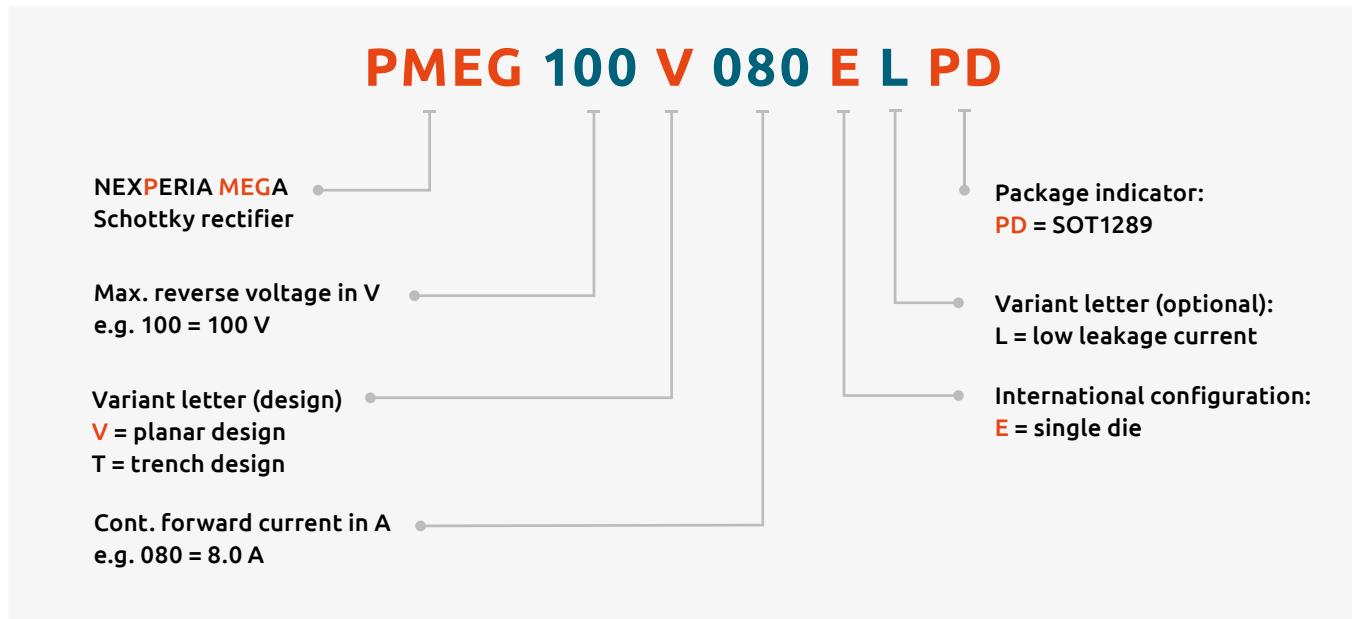




ESD protection, TVS, filtering and signal conditioning

3

Low capacitance ESD protection for high-speed interfaces.....	52
Low capacitance ESD protection for high-speed interfaces	52
General ESD protection devices.....	53
General purpose ESD protection devices	55
Application-specific ESD solutions	56
Audio interface protection.....	56
Automotive high-speed network protection	56
Automotive in-vehicle network bus line protection	57
Charger port protection.....	57
Antenna protection (NFC, WiFi,...).....	58
USB protection	58
Transient voltage surge suppressor (TVS).....	59
TVS diodes, compact	59
TVS diodes, 24 W/40 W	59
TVS diodes, 400 W	60
TVS diodes, 600W	61
Nomenclatures	62






Low capacitance ESD protection for high-speed interfaces

Low capacitance ESD protection for high-speed interfaces

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	ESD rating max (kV) [1]	Surge robustness 8/20 µs (A)	Configuration	Type	Package	Size (mm)	
Unidirectional	Bidirectional										
1	0	0	1	5	0.4	0.55	10	PESD5V0F1BLD	DFN1006D-2 (SOD882D)	1.0 x 0.6 x 0.37	
		5	0.95	1.15	8			PESD5V0F1BRLD			
			1.55	1.75	15			PESD5V0X1ULD			
		5	0.95	1.15	8			PESD5V0X1UALD			
			1.55	1.75	15			PESD5V0X1UB	SOD523 (SC-79)		
		3.3	0.6	1.5	30	5		PESD3V3U1UT			
			5	0.6	1.5	30		PESD5V0U1UT			
			12	0.6	1.5	30		PESD12VU1UT			
			15	0.6	1.5	30		PESD15VU1UT			
			24	0.6	1.5	23		PESD24VU1UT			
2	0	1	5	0.9	1.3	9		PESD5V0X1BQ	SOT663	1.6 x 1.2 x 0.55	
		80	0.6	0.75	30			PESD5V0X1BT	SOT23	2.9 x 1.3 x 1.0	
								NUP1301U	SOT323	2.0 x 1.25 x 0.95	
			2.3	2.75	30			NUP1301	SOT23	2.9 x 1.3 x 1.0	
								NUP1301QA	SOT1215	1.1 x 0.9 x 0.4	
		3	0	5.5	1	1.5	8	PRTR5V0U2X	SOT143B	2.9 x 1.3 x 1.0	
					1.8	-	12	PRTR5V0U2AX			
4	0	5.5	1	-	8			PRTR5V0U4D	SOT457 (SC-74)	2.9 x 1.5 x 1.0	

[1] according to IEC 61000-4-2 (contact discharge)

General purpose ESD protection devices

Number of protected lines		V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	P _{PP max} (W) [1]	ESD rating max (kV) [2]	I _{R max} (µA) @ V _{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
1	0	5	25	30	42	26	0.1		PESD5V0L1ULD		1.0 x 0.6 x 0.4
			152	200	150	30	1		PESD5V0S1ULD		
			12	38	75	150	0.05		PESD12VS1ULD		
			15	32	70	150	0.05		PESD15VS1ULD		
			24	23	50	150	0.05		PESD24VS1ULD		
			2.5	229	300	260	30		PESD5Z2.5		
			3.3	2.6	3.1	-	9		PESD3V3U1UB		
			34	40	45	30	0.3		PESD3V3L1UB		
			172	200	260	30	0.05		PESD5Z3.3		
			207	300	330	30	2		PESD3V3S1UB		
		5	2	2.6	-	9	0.1		PESD5V0U1UB		1.2 x 0.8 x 0.6
			25	30	42	26	0.1		PESD5V0L1UB		
			89	150	180	30	0.05		PESD5Z5.0		
			152	200	260	30	1		PESD5V0S1UB		
		6	78	150	180	30	0.01		PESD5Z6.0		
		7	69	150	180	30	0.01		PESD5Z7.0		
		12	35	75	200	30	0.01		PESD5Z12		
			38	75	180	30	0.05		PESD12VS1UB		
		15	32	70	160	30	0.05		PESD15VS1UB		
		24	23	50	160	23	0.05		PESD24VS1UB		
		3.3	2.6	3.1	-	9	0.1 (@ 3 V)		PESD3V3U1UA		1.7 x 1.25 x 0.95
		5	2	2.6	-	9	0.1		PESD5V0U1UA		
			25	30	42	26	0.1		PESD5V0L1UA		
			480	530	890	30	4		PESD5V0S1UA		
		12	160	180	600	30	0.1		PESD12VS1UA		
		24	23	50	160	23	0.05		PESD24VS1UA		
		5	480	530	890	30	4		PESD5V0S1UJ		1.7 x 1.25 x 0.7
		12	160	180	600	30	0.1		PESD12VS1UJ		
		36	18	30	150	30	0.01		PESD36VS1UJ		
0	1	3.3	101	-	500	30	2		PESD3V3L1BA		1.7 x 1.25 x 0.95
			75	-	500	30	1		PESD5V0L1BA		
			19	-	200	30	0.05		PESD12VL1BA		
			16	-	200	30	0.05		PESD15VL1BA		
			11	-	200	23	0.05		PESD24VL1BA		
		4.5	65	78	-	30	0.05		PTVS4V5D1BL	DFN1006-2 (SOD882)	



[1] 8 / 20 µs exponential decay waveform according to IEC 61000-4-5

[2] according to IEC 61000-4-2 (contact discharge)

ESD protection, TVS, filtering
and signal conditioning






General ESD protection devices

General purpose ESD protection devices

Number of protected lines		V_{RWM} (V)	$C_{line\ typ}$ (pF)	$C_{line\ max}$ (pF)	$P_{PP\ max}$ (W) [1]	ESD rating max (kV)	$I_R\ max$ (μ A) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	1	1	11	13	45	30	0.01	 mse211	PESD5V0V1BLD	DFN1006D-2 (SOD882D)	1.7 x 1.25 x 0.95
			35	45	130	30	0.1		PESD5V0S1BLD		
			11	13	45	30	0.01		PESD5V0V1BB	SOD523 (SC-79)	1.2 x 0.8 x 0.6
			35	45	130	30	0.1		PESD5V0S1BB		
			11	13	45	30	0.01		PESD5V0V1BA	SOD323 (SC-76)	1.7 x 1.25 x 0.95
			35	45		30	0.1		PESD5V0S1BA		
		2.9	3.5	-	10	0.1	 mse212	PESD5V0U1BLD	DFN1006D-2 (SOD882D)		
								PESD5V0U1BB	SOD523 (SC-79)		
								PESD5V0U1BA	SOD323 (SC-76)		
								PESD5V0U1BA	PESD3V3S2UQ	SOT663 	1.6 x 1.2 x 0.55
2	1	1	3.3	200	275	150	30	3	PESD5V0S2UQ		
			5	150	215	150	30	0.3	PESD12VS2UQ		
			12	38	100	150	30	0.03	PESD15VS2UQ		
			15	32	70	150	30	0.05	PESD24VS2UQ		
			24	23	50	150	23	0.05	PESD3V3S2UT		
			3.3	207	300	330	30	2	PESD5V2S2UT		
			5.2	152	200	260	30	1	PESD12VS2UT		
			12	38	75	180	30	1	PESD15VS2UT		SOT23 
			15	32	70	160	30	1	PESD24VS2UT		
			24	23	50	160	23	1	PESD36VS2UT		
		3.3	17	35	160	30	1 (@ 30 V)	PESD3V3S2UAT			
			3.3	207	300	330	30	2	PESD5V0S2UAT		
			5	152	200	260	30	1	PESD15VS2UAT		
			15	32	70	160	30	0.05	PESD24VS2UAT		
			24	23	50	160	23	0.05	PESD5V0L2UU	SOT323 (SC-70) 	2 x 1.25 x 0.95
			5	38	46	70	30	0.09 (@ 4 V)	PESD6V0L2UU		
			6	34	40	60	30	0.018 (@ 4.3 V)			

[1] 8 / 20 μ s exponential decay waveform according to IEC 61000-4-2 [2] according to IEC 61000-4-5 (contact discharge)

General purpose ESD protection devices

Number of protected lines		V_{RWM} (V)	$C_{line\ typ}$ (pF)	$C_{line\ max}$ (pF)	$P_{EP\ max}$ (W)	ESD rating max (kV) [2]	$I_R\ max$ (μ A) @ V_{RWM}	Configuration	Type	Package	Size (mm)
Unidirectional	Bidirectional										
0	2	3.3	101	-	350	30	2		PESD3V3L2BT		2.9 x 1.3 x 1
		5	75	-		30	1		PESD5V0L2BT		
		12	19	-	200	30	0.05		PESD12VL2BT		
		15	16	-		30	0.05		PESD15VL2BT		
		24	11	-		23	0.05		PESD24VL2BT		
		5	35	45	130	30	0.1		PESD5V0S2BT		
			2.9	3.5	-	10	0.1		PESD5V0U2BT		
4	3	3.3	22	28	30	20	0.3		PESD3V3L4UW		1.6 x 1.2 x 0.55
		5	16	19	30	20	0.025		PESD5V0L4UW		
		3.3	15	18	16	12	0.3		PESD3V3V4UW		
		5	12	15	16	12	0.025		PESD5V0V4UW		
		3	200	240	-	8	2		BZA856A		2 x 1.25 x 0.95
		3.3	22	28	30	20	0.3		PESD3V3L4UG		
		5	16	19	30	20	0.025		PESD5V0L4UG		
		3	200	240	-	8	2		BZA456A		2.9 x 1.5 x 1
		3.3	215	300	200	30	0.8		PESD3V3S4UD		
		5	165	220	200	30	0.2		PESD5V0S4UD		
		15	37	48	-	8	0.1		BZA420A		
		24	40	70	200	23	0.01		PESD24VS4UD		
0	4	5	45	75	-	15	0.1		BZA408B		1.6 x 1.2 x 0.55
			2.9	3.5	-	10	0.1		PESD5V0U4BW		
5	4	3.3	22	28	25	20	0.3		PESD3V3L5UV		1.6 x 1.2 x 0.55
			5	16	19	25	0.025		PESD5V0L5UV		
		3.3	22	28	25	20	0.3		PESD3V3L5UY		2 x 1.25 x 0.95
		5	16	19	25	20	0.025		PESD5V0L5UY		
		3.3	215	300	200	30	0.8		PESD3V3S5UD		2.9 x 1.5 x 1.0
		5	165	220	200	30	0.2		PESD5V0S5UD		
		24	45	70	200	23	0.015		PESD24VS5UD		
0	5	5	2.9	3.5	-	10	0.1		PESD5V0U5BV		1.6 x 1.2 x 0.55

[1] 8 / 20 μ s exponential decay waveform according to IEC 61000-4-5

[2] according to IEC 61000-4-2 (contact discharge)



ESD protection, TVS, filtering
and signal conditioning

Audio interface protection

Lines	V_{RWM} (V)	V_{BR} min (V)	V_{BR} max (V)	C_D typ (pF)	C_D max (pF)	I_{FPM} 8/20μs (A)	V_{CL} 8/20μs @ I_{FPM} (V)	V_{ESD} (nV)	Configuration	Type	Package
1	4.5	4.7		65	78	34	13.2	30		PTVS4V5D1BL	DFN1006-2 (SOD882) 
	5	5.5	9.5	70	90	28	11.5	30		PESD5V0S2BQA	DFN1010D-3 (SOT1215) 
				35	45	12	14	30		PESD5V0S1BLD	DFN1006D-2 (SOD882D) 
				5.8	7.8	11	13	4.8		PESD5V0V1BLD	



Automotive high-speed network protection

Types in **bold** represent new products

Number of protected lines	V_{RWM} (V)	C_{line} typ (pF)	I_{RMM} max (μA)	ESD rating max (kV) ⁽¹⁾	Configuration	Type	Package	Size (mm)
2	5	1	0.1	8		PESD2ETH-X		2.9 x 1.3 x 1.0
		1.8	0.1	12		PESD2ETH-AX		
2	5	1.3	0.1	8		PESD2ETH-D		2.9 x 1.5 x 1.0
		2	0.1	12		PESD2ETH-AD		
4	5.5	0.6	1 @ 3 V	8		PESD1LVDS		2.5 x 1.0 x 0.48
		0.6	1 @ 3 V	8		PRTR5V0U4D		2.9 x 1.5 x 1.0

⁽¹⁾ according to IEC 61000-4-2 (contact discharge)

Automotive in-vehicle network bus line protection

Number of protected lines bidirectional	V _{RWM} (V)	C _{line typ} (pF)	C _{line max} (pF)	I _{PPM} 8/20μs (A)	V _{CL} 8/20μs @ I _{PPM} (V)	ESD rating max (kV) [1]	I _{r max} [μA] @ V _{RWM}	Configuration	Type	Package	Size (mm)
1	24	14	17	3.5	42	30	0.05		PESD1IVN24-A	 SOD323 (SC-76)	1.7 x 1.25 x 0.95
	27	14	17	3	45	30	0.05		PESD1IVN27-A		
2	24	14	17	3.5	42	30	0.05		PESD2IVN24-T	 SOT23	2.0 x 1.25 x 0.95
	27	14	17	3	45	30	0.05		PESD2IVN27-T		
1	27	14	17	3	45	30	0.05		PESD1IVN27-U	 SOT323	2.0 x 1.25 x 0.95
2	24	14	17	3.5	42	30	0.05		PESD2IVN24-U		
	27	14	17	3	45	30	0.05		PESD2IVN27-U		
1	15 (diode 1) 24 (diode 2)	13	17	3 (diode 1) 5 (diode 2)	70 (diode 1) 44 (diode 2)	23	0.05		PESD1LIN	 SOD323 (SC-76)	1.7 x 1.25 x 0.95
2	24	11	17	3	70	23	0.05		PESD1CAN	 SOT23	2.9 x 1.3 x 1.0
		25	30	5	41	30	0.01		PESD2CAN		
		11	17	3	70	23	0.05		PESD1FLEX	 SOT323	2.0 x 1.25 x 0.95
		9.3	12	3	50	23	0.05		PESD1CAN-U		
1	26.5	8.5	11	3	53	23	0.05		PESD1IVN-U	 SOT323	2.0 x 1.25 x 0.95
2									PESD2IVN-U		

[1] 8 / 20 μs surge pulse according to IEC 61000-4-5


[2] according to IEC 61000-4-2 (contact discharge)

Charger port protection

Number of protected lines	C _{line} (pF)	V _{RWM} (V)	I _{PPM} 8/20μs (A)	Type	Package	Size (mm)
1 x bi	65	4.5	34	PTVS4V5D1BL	 DFN1006-2	1.0 x 0.6 x 0.48
1 x uni	160	12	22.5	PESD12VS1UJ	 SOD323F (SC-90)	1.7 x 1.25 x 0.7
	480	5	22.5	PESD5V0S1UJ		
	160	12	47	PESD12VS1UA	 SOD323 (SC-76)	1.7 x 1.25 x 0.95
	480	5	47	PESD5V0S1UA		
2 x bi	35	5	15	PESD5V0S2BQA	 DFN1010D-3 (SOT1215)	1.1 x 1.0 x 0.37

 ESD protection, TVS, filtering
and signal conditioning

Antenna protection (NFC, WiFi,...)

Number of protected lines (Bidirectional)	V _{RWM} [V]	C _{line typ} [pF]	C _{line max} [pF]	ESD rating ^[1] max [kV]	Configuration	Type	Package	Size
1	18	0.35	0.5	10	 mea211	PESD18VF1BL		1.0 x 0.6 x 0.48
	24	0.3	0.45	10		PESD24VF1BL		1.0 x 0.6 x 0.48

^[1] according to IEC 61000-4-2 (contact discharge)

USB protection

Interface	Number of protected lines	R _{line}	C _{line} (pF)	Remark	Type	Package	Size (mm)
USB2.0 (Plastic package)	2	-	1.0	ESD protection for up to 2 ultra high-speed datalines	PRTR5V0U2X		2.9 x 1.3 x 1.0
			1.8	ESD protection for up to 2 ultra high-speed datalines with 12 kV ESD robustness	PRTR5V0U2AX		
	4	-	0.8	Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4Y		2.0 x 1.25 x 0.95
			1	Very low clamp ESD protection for USB2.0 high-speed with 12 kV IEC ESD protection	PUSB2X4D		
				Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	IP4220CZ6		2.9 x 1.5 x 1.0
				Dual ESD protection for USB2.0 high-speed, SD-card, SIM card	PRTR5V0U4D		



TVS diodes, compact

Types in **bold** represent new products

P_{PPM} 10/1000μs	V_{RWMM}	V_{BR} min	V_{BR} max	I_{PPM} 8/20μs	V_{CL} 8/20μs	I_{PPM} 10/1000μs	V_{CL} 10/1000μs	Type	Package	Size
300	4.5	4.7	-	34	13.2	-	-	PTVS4V5D1BL	DFN1006-2 (SOD882) 	1.0 x 0.6 x 0.48
	7.5	8.33	9.21	178	19.7	23.3	12.9	PTVS7V5U1UPA	DFN2020-3 (SOT1061) 	2.0 x 2.0 x 0.62
	10	11.1	12.3	148	23	17.6	17	PTVS10VU1UPA		
	12	13.3	14.7	131	25.2	15.1	19.9	PTVS12VU1UPA		
	15	16.7	18.5	111	28.8	12.3	24.4	PTVS15VU1UPA		
	18	20	22.1	97	32	10.3	29.2	PTVS18VU1UPA		
	20	22.2	24.5	98.5	38.7	9.2	32.5	PTVS20VU1UPA		
	22	24.4	26.9	88.5	41	8.4	35.5	PTVS22VU1UPA		
	24	26.7	29.5	79	44.2	7.7	38.8	PTVS24VU1UPA		
	26	28.9	31.9	69	43.5	7	43	PTVS26VU1UPA		

TVS diodes, 24 W/40 W

Types in **bold** represent new products

Power (W) (10 / 1000 μs waveform) [1]	V_{RWMM} (V)	V_{BR} min (V) @ I_R	V_{BR} typ (V) @ I_R	V_{BR} max (V) @ I_R	I_R (mA)	ESD rating max (kV) [1]	C_{line} typ (pF)	V_{CL} max (V) @ I_{PP} [1]	I_{PP} (A) [1]	I_{RM} max (μA) @ V_{RWMM}	Configuration	Type	Package	Size (mm)
24	3	5.32	5.6	5.88	20	30	210	8	3	5	 mmz012	MMBZ5V6AL		2.9 x 1.3 x 1.0
		5.89	6.2	6.51	1	30	175	8.7	2.76	0.2		MMBZ6V2AL		
	4.5	6.48	6.8	7.14	1	30	150	9.6	2.5	0.3		MMBZ6V8AL		
	6	8.65	9.1	9.56	1	30	155	14	1.7	0.1		MMBZ9V1AL		
	6.5	9.5	10	10.5	1	30	130	14.2	1.7	0.02		MMBZ10VAL		
40	 bra004	8.5	11.4	12	12.6	1	30	110	17	2.35	0.005	MMBZ12VAL		2.9 x 1.3 x 1.0
		12	14.25	15	15.75	1	30	85	21	1.9	0.005	MMBZ15VAL		
		13	15.2	16	16.8	1	30	76	23	1.9	0.005	MMBZ16VAL		
		13	15.68	16	16.32	1	30	76	23	1.9	0.005	MMBZ16VTL		
		14.5	17.1	18	18.9	1	30	70	25	1.6	0.005	MMBZ18VAL		
		17	19	20	21	1	30	65	28	1.4	0.005	MMBZ20VAL		
		22	25.65	27	28.35	1	30	48	40	1	0.005	MMBZ27VAL		
		26	31.35	33	34.65	1	30	45	46	0.87	0.005	MMBZ33VAL		
		8.5	11.4	12	12.6	1	30	110	17	2.35	0.005	MMBZ12VDL		
		12.8	14.3	15	15.8	1	30	85	21.2	1.9	0.005	MMBZ15VDL		
		14.5	17.1	18	18.9	1	30	70	25	1.6	0.005	MMBZ18VCL		
		17	19	20	21	1	30	65	28	1.4	0.005	MMBZ20VCL		
		22	25.65	27	28.35	1	30	48	38	1	0.005	MMBZ27VCL		
		26	31.35	33	34.65	1	30	45	46	0.87	0.005	MMBZ33VCL		

Transient voltage surge suppressor (TVS)

TVS diodes, 400 W

Power (W) (10/1000 μs waveform) [1]	V _{RWM} (V)	V _{BR} min (V) @ I _R	V _{BR} typ (V) @ I _R	V _{BR} max (V) @ I _R	I _R (mA)	V _{CL} max (V) @ I _{PP} [1]	I _{PP} (A) [1]	I _{RM} typ (μA) @ V _{RWM}	I _{RM} max (μA) @ V _{RWM}	Type (T _j max = 150 °C)	Type (T _j max = 185 °C)	Package	Size (mm)
350	3.5	5.20	5.60	6.00	10	8.0	43.8	5	600	PTVS3V3S1UR	PTVS3V3S1UTR		
400	5.0	6.40	6.70	7.00	10	9.2	43.5	5	400	PTVS5V0S1UR	PTVS5V0S1UTR	SOD123W	2.6 x 1.7 x 1.0
	6.0	6.67	7.02	7.37	10	10.3	38.8	5	400	PTVS6V0S1UR	PTVS6V0S1UTR		
	6.5	7.22	7.60	7.98	10	11.2	35.7	5	250	PTVS6V5S1UR	PTVS6V5S1UTR		
	7.0	7.78	8.20	8.60	10	12.0	33.3	3	100	PTVS7V0S1UR	PTVS7V0S1UTR		
	7.5	8.33	8.77	9.21	1	12.9	31.0	0.2	50	PTVS7V5S1UR	PTVS7V5S1UTR		
	8.0	8.89	9.36	9.83	1	13.6	29.4	0.03	25	PTVS8V0S1UR	PTVS8V0S1UTR		
	8.5	9.44	9.92	10.40	1	14.4	27.8	0.01	10	PTVS8V5S1UR	PTVS8V5S1UTR		
	9.0	10.00	10.55	11.10	1	15.4	26.0	0.005	5	PTVS9V0S1UR	PTVS9V0S1UTR		
	10	11.10	11.70	12.30	1	17.0	23.5	0.005	2.5	PTVS10VS1UR	PTVS10VS1UTR		
	11	12.20	12.85	13.50	1	18.2	22.0	0.005	2.5	PTVS11VS1UR	PTVS11VS1UTR		
	12	13.30	14.00	14.70	1	19.9	20.1	0.005	2.5	PTVS12VS1UR	PTVS12VS1UTR		
	13	14.40	15.15	15.90	1	21.5	18.6	0.001	0.1	PTVS13VS1UR	PTVS13VS1UTR		
	14	15.60	16.40	17.20	1	23.2	17.2	0.001	0.1	PTVS14VS1UR	PTVS14VS1UTR		
	15	16.70	17.60	18.50	1	24.4	16.4	0.001	0.1	PTVS15VS1UR	PTVS15VS1UTR		
	16	17.80	18.75	19.70	1	26.0	15.4	0.001	0.1	PTVS16VS1UR	PTVS16VS1UTR		
	17	18.90	19.90	20.90	1	27.6	14.5	0.001	0.1	PTVS17VS1UR	PTVS17VS1UTR		
	18	20.00	21.00	22.10	1	29.2	13.7	0.001	0.1	PTVS18VS1UR	PTVS18VS1UTR		
	20	22.20	23.35	24.50	1	32.4	12.3	0.001	0.1	PTVS20VS1UR	PTVS20VS1UTR		
	22	24.40	25.60	26.90	1	35.5	11.3	0.001	0.1	PTVS22VS1UR	PTVS22VS1UTR		
	24	26.70	28.10	29.50	1	38.9	10.3	0.001	0.1	PTVS24VS1UR	PTVS24VS1UTR		
	26	28.90	30.40	31.90	1	42.1	9.5	0.001	0.1	PTVS26VS1UR	PTVS26VS1UTR		
	28	31.10	32.80	34.40	1	45.4	8.8	0.001	0.1	PTVS28VS1UR	PTVS28VS1UTR		
	30	33.30	35.10	36.80	1	48.4	8.3	0.001	0.1	PTVS30VS1UR	PTVS30VS1UTR		
	33	36.70	38.70	40.60	1	53.3	7.5	0.001	0.1	PTVS33VS1UR	PTVS33VS1UTR		
	36	40.00	42.10	44.20	1	58.1	6.9	0.001	0.1	PTVS36VS1UR	PTVS36VS1UTR		
	40	44.40	46.80	49.10	1	64.5	6.2	0.001	0.1	PTVS40VS1UR	PTVS40VS1UTR		
	43	47.80	50.30	52.80	1	69.4	5.8	0.001	0.1	PTVS43VS1UR	PTVS43VS1UTR		
	45	50.00	52.65	55.30	1	72.7	5.5	0.001	0.1	PTVS45VS1UR	PTVS45VS1UTR		
	48	53.30	56.10	58.90	1	77.4	5.2	0.001	0.1	PTVS48VS1UR	PTVS48VS1UTR		
	51	56.70	59.70	62.70	1	82.4	4.9	0.001	0.1	PTVS51VS1UR	PTVS51VS1UTR		
	54	60.00	63.15	66.30	1	87.1	4.6	0.001	0.1	PTVS54VS1UR	PTVS54VS1UTR		
	58	64.40	67.80	71.20	1	93.6	4.3	0.001	0.1	PTVS58VS1UR	PTVS58VS1UTR		
	60	66.70	70.20	73.70	1	96.8	4.1	0.001	0.1	PTVS60VS1UR	PTVS60VS1UTR		
	64	71.10	74.85	78.60	1	103.0	3.9	0.001	0.1	PTVS64VS1UR	PTVS64VS1UTR		


⁽¹⁾ 10 / 1000 μs according to IEC 61643-321

TVS diodes, 600W

Power (W) (10 / 1000 μs waveform) [1]	V _{RWM} (V)	V _{BR min} (V) @ I _R	V _{BR typ} (V) @ I _R	V _{BR max} (V) @ I _R	I _R (mA)	V _{cl max} (V) @ I _{PP} [1]	I _{PP} (A) [1]	I _{RM typ} (μA) @ V _{RWM}	I _{RM max} (μA) @ V _{RWM}	Type (T _j max = 150 °C)	Type (T _j max = 185 °C)	Package	Size (mm)
600	3.5	5.20	5.60	6.00	10	8	75	5	600	PTVS3V3P1UP	PTVS3V3P1UTP	SOD128	3.8 x 2.6 x 1.0
	5	6.40	6.70	7.00	10	9.2	65.2	5	400	PTVS5V0P1UP	PTVS5V0P1UTP		
	6	6.67	7.02	7.37	10	10.3	58.3	5	400	PTVS6V0P1UP	PTVS6V0P1UTP		
	6.5	7.22	7.60	7.98	10	11.2	53.6	5	250	PTVS6V5P1UP	PTVS6V5P1UTP		
	7	7.78	8.20	8.60	10	12	50	3	100	PTVS7V0P1UP	PTVS7V0P1UTP		
	7.5	8.33	8.77	9.21	1	12.9	46.5	0.2	50	PTVS7V5P1UP	PTVS7V5P1UTP		
	8	8.89	9.36	9.83	1	13.6	44.1	0.03	25	PTVS8V0P1UP	PTVS8V0P1UTP		
	8.5	9.44	9.92	10.40	1	14.4	41.7	0.01	10	PTVS8V5P1UP	PTVS8V5P1UTP		
	9	10.00	10.55	11.10	1	15.4	39	0.005	5	PTVS9V0P1UP	PTVS9V0P1UTP		
	10	11.10	11.70	12.30	1	17	35.3	0.005	2.5	PTVS10VP1UP	PTVS10VP1UTP		
	11	12.20	12.85	13.50	1	18.2	33	0.005	2.5	PTVS11VP1UP	PTVS11VP1UTP		
	12	13.30	14.00	14.70	1	19.9	30.2	0.005	2.5	PTVS12VP1UP	PTVS12VP1UTP		
	13	14.40	15.15	15.90	1	21.5	27.9	0.001	0.1	PTVS13VP1UP	PTVS13VP1UTP		
	14	15.60	16.40	17.20	1	23.2	25.9	0.001	0.1	PTVS14VP1UP	PTVS14VP1UTP		
	15	16.70	17.60	18.50	1	24.4	24.6	0.001	0.1	PTVS15VP1UP	PTVS15VP1UTP		
	16	17.80	18.75	19.70	1	26	23.1	0.001	0.1	PTVS16VP1UP	PTVS16VP1UTP		
	17	18.90	19.90	20.90	1	27.6	21.7	0.001	0.1	PTVS17VP1UP	PTVS17VP1UTP		
	18	20.00	21.00	22.10	1	29.2	20.5	0.001	0.1	PTVS18VP1UP	PTVS18VP1UTP		
	20	22.20	23.35	24.50	1	32.4	18.5	0.001	0.1	PTVS20VP1UP	PTVS20VP1UTP		
	22	24.40	25.60	26.90	1	35.5	16.9	0.001	0.1	PTVS22VP1UP	PTVS22VP1UTP		
	24	26.70	28.10	29.50	1	38.9	15.4	0.001	0.1	PTVS24VP1UP	PTVS24VP1UTP		
	26	28.90	30.40	31.90	1	42.1	14.2	0.001	0.1	PTVS26VP1UP	PTVS26VP1UTP		
	28	31.10	32.80	34.40	1	45.4	13.2	0.001	0.1	PTVS28VP1UP	PTVS28VP1UTP		
	30	33.30	35.10	36.80	1	48.4	12.4	0.001	0.1	PTVS30VP1UP	PTVS30VP1UTP		
	33	36.70	38.70	40.60	1	53.3	11.3	0.001	0.1	PTVS33VP1UP	PTVS33VP1UTP		
	36	40.00	42.10	44.20	1	58.1	10.3	0.001	0.1	PTVS36VP1UP	PTVS36VP1UTP		
	40	44.40	46.80	49.10	1	64.5	9.3	0.001	0.1	PTVS40VP1UP	PTVS40VP1UTP		
	43	47.80	50.30	52.80	1	69.4	8.6	0.001	0.1	PTVS43VP1UP	PTVS43VP1UTP		
	45	50.00	52.65	55.30	1	72.7	8.3	0.001	0.1	PTVS45VP1UP	PTVS45VP1UTP		
	48	53.30	56.10	58.90	1	77.4	7.8	0.001	0.1	PTVS48VP1UP	PTVS48VP1UTP		
	51	56.70	59.70	62.70	1	82.4	7.3	0.001	0.1	PTVS51VP1UP	PTVS51VP1UTP		
	54	60.00	63.15	66.30	1	87.1	6.9	0.001	0.1	PTVS54VP1UP	PTVS54VP1UTP		
	58	64.40	67.80	71.20	1	93.6	6.4	0.001	0.1	PTVS58VP1UP	PTVS58VP1UTP		
	60	66.70	70.20	73.70	1	96.8	6.2	0.001	0.1	PTVS60VP1UP	PTVS60VP1UTP		
	64	71.10	74.85	78.60	1	103	5.8	0.001	0.1	PTVS64VP1UP	PTVS64VP1UTP		

⁽¹⁾ 10 / 1000 μs according to IEC 61643-321

Nomenclature - protection devices

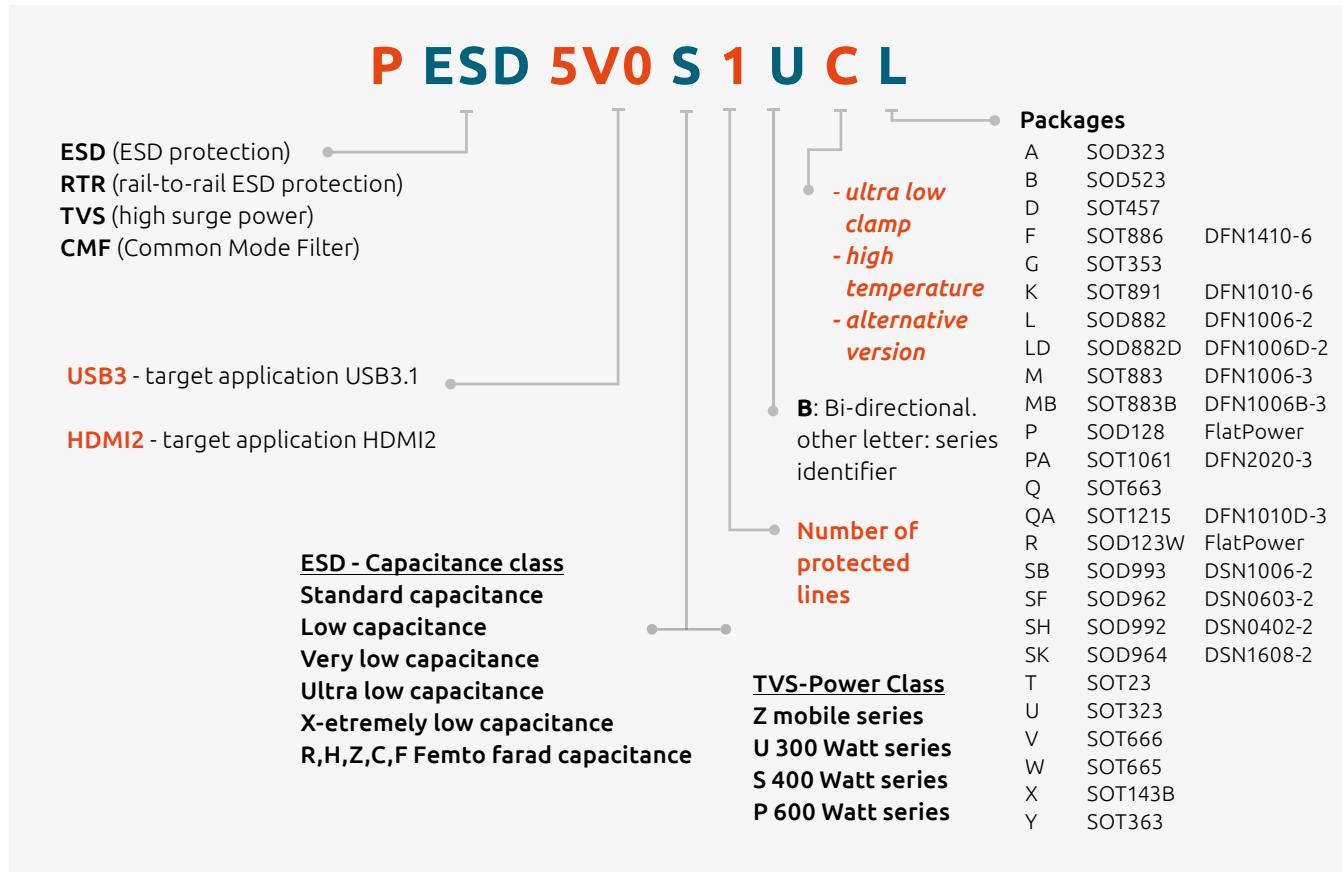




MOSFETs

4

Automotive MOSFETs.....66

Automotive grade MOSFETs nomenclature.....	66
N-channel 30V automotive power MOSFETs	66
N-channel 40V automotive power MOSFETs	67
N-channel 55V-60V automotive power MOSFETs.....	68
N-channel 75V-80V automotive power MOSFETs.....	71
N-channel 100V automotive power MOSFETs.....	72
P-channel 30V-60V automotive power MOSFETs	73
Small-signal automotive MOSFETs – Low $R_{DS(on)}$	74
Small-signal automotive MOSFETs – High $R_{DS(on)}$	76
Small-signal automotive MOSFETs – Dual	76
Small-signal MOSFETs complementary	76

Automotive grade MOSFETs nomenclature

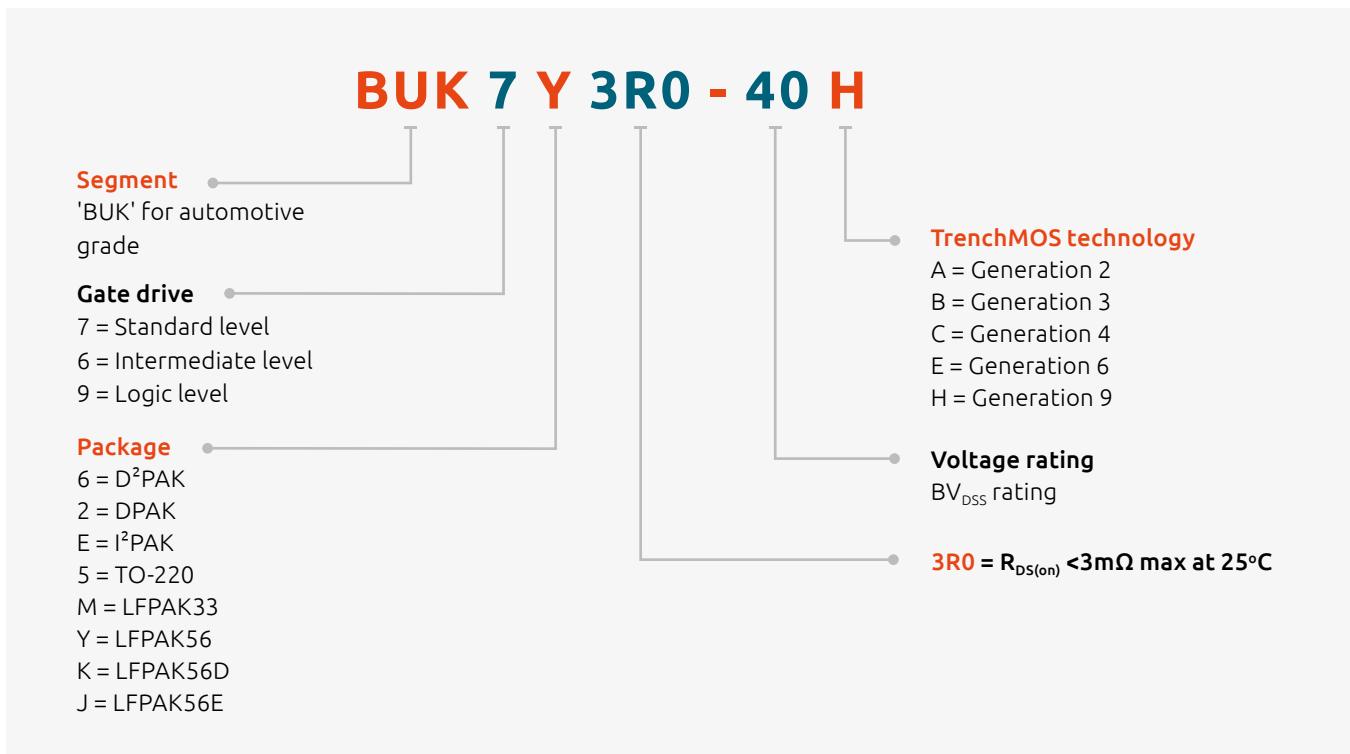

N-channel 30V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
D ² PAK (SOT404) 	BUK962R8-30B	30	2.4	2.8	75	0.5
	BUK762R7-30B	30	2.7		75	0.5
	BUK763R4-30B	30	3.4		75	0.59
	BUK9607-30B	30	5	7	75	0.95
	BUK7607-30B	30	7		75	0.95
LFPAK56: Power-SO8 (SOT669) 	BUK9Y07-30B	30	6	7	75	1.42
	BUK7Y07-30B	30	7		75	1.42
	BUK9Y11-30B	30	9	11	59	2
	BUK7Y10-30B	30	10		67	1.76
	BUK9Y22-30B	30	19	22	37.7	2.53
	BUK7Y20-30B	30	20		39.5	2.53
LFPAK56D (SOT1205) 	BUK9K5R1-30E	30	4.4	5.3	40	2.21
	BUK9K5R6-30E	30	4.7	5.8	40	2.36
	BUK7K5R1-30E	30	5.1		40	2.21
	BUK7K5R6-30E	30	5.6		40	2.36
LFPAK33 (SOT1210) 	BUK9M5R2-30E	30	4.1	5.2	70	1.89
	BUK9M6R6-30E	30	5.3	6.6	70	2
	BUK9M10-30E	30	7.8	10	54	2.75
	BUK9M17-30E	30	14	17	37	3.4

N-channel 40V automotive power MOSFETs

Types in **bold** represent new products

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
TO-220AB (SOT78)	BUK751R8-40E	40	1.8		120	0.43
	BUK752R3-40E	40	2.3		120	0.51
	BUK753R1-40E	40	3.1		100	0.64
	BUK758R3-40E	40	7.4		75	1.56
D ² PAK (SOT404)	BUK961R6-40E	40	1.4	1.6	120	0.43
	BUK761R6-40E	40	1.6		120	0.43
	BUK761R7-40E	40	1.6		120	0.46
	BUK762R0-40E	40	2		120	0.51
	BUK962R6-40E	40	2.4	2.8	100	0.57
	BUK762R6-40E	40	2.6		100	0.57
	BUK963R1-40E	40	2.7	3.1	100	0.64
	BUK762R9-40E	40	2.9		100	0.64
	BUK964R1-40E	40	3.5	4.1	75	0.82
	BUK764R0-40E	40	4		75	0.82
	BUK965R4-40E	40	4.4	5.4	75	1.09
	BUK765R3-40E	40	4.9		75	1.09
	BUK768R1-40E	40	7.2		75	1.56
DPAK (SOT428)	BUK9209-40B	40	7	9	75	0.95
	BUK7208-40B	40	8		75	0.95
i ² PAK (SOT226)	BUK7E1R8-40E	40	1.8		120	0.43
	BUK7E1R9-40E	40	1.9		120	0.46
	BUK7E2R3-40E	40	2.3		120	0.51
	BUK7E3R1-40E	40	3.1		100	0.64
	BUK7E8R3-40E	40	7.4		75	1.56
LFPAK56E (SOT1023)	BUK9J0R9-40H	40	0.9	1.2	220	0.3
	BUK7J1R0-40H	40	1		220	0.3
	BUK7J1R4-40H	40	1.4		120	0.38
LFPAK56; Power-SO8 (SOT669)	BUK9Y1R3-40H	40	1.3	1.8	120	0.38
	BUK7Y1R4-40H	40	1.4		190	0.38
	BUK9Y1R6-40H	40	1.6	2.2	120	0.51
	BUK7Y1R7-40H	40	1.7		120	0.51
	BUK9Y1R9-40H	40	1.9	2.6	120	0.69
	BUK7Y2R0-40H	40	2		120	0.69
	BUK9Y2R4-40H	40	2.4	3.2	120	0.79
	BUK9Y3R0-40E	40	2.5	3	100	0.77
	BUK7Y2R5-40H	40	2.5		120	0.79
	BUK9Y2R8-40H	40	2.8	3.9	120	0.87
	BUK7Y3R0-40H	40	3		120	0.87
	BUK7Y3R5-40E	40	3.5		100	0.9
	BUK9Y3R5-40E	40	3.6	3.8	100	0.9
	BUK9Y4R4-40E	40	3.7	4.4	100	1.02
	BUK7Y4R4-40E	40	4.4		100	1.02
	BUK9Y7R6-40E	40	6	7.6	79	1.58
	BUK7Y7R6-40E	40	7.6		79	1.58
	BUK9Y12-40E	40	10	12	52	2.31
	BUK7Y12-40E	40	12		52	2.31
	BUK9Y21-40E	40	17	21	33	3.33
	BUK7Y21-40E	40	21		33	3.33
	BUK9Y29-40E	40	25	29	25	4.03
	BUK7Y29-40E	40	29		26	4.03

N-channel 40V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
LFPAK56D (SOT1205)	BUK7K6R2-40E	40	5.8		40	2.21
	BUK9K6R2-40E	40	6	6.2	40	2.21
	BUK9K6R8-40E	40	6.1	7.2	40	2.36
	BUK7K6R8-40E	40	6.8			2.36
	BUK9K8R7-40E	40	8	9.4	30	2.84
	BUK7K8R7-40E	40	8.5			2.84
	BUK9K18-40E	40	16	20	30	3.96
	BUK7K18-40E	40	19		24.2	3.96
	BUK9K25-40E	40	24	29	18.2	4.68
	BUK7K25-40E	40	25			4.68
LFPAK33 (SOT1210)	BUK7M6R3-40E	40	6.3		70	1.89
	BUK7M8R0-40E	40	8		69	2
	BUK7M10-40E	40	10		56	2.43
	BUK7M12-40E	40	12		48	2.75
	BUK7M21-40E	40	21		33	3.4
	BUK7M45-40E	40	45		19	4.8
	BUK9M14-40E	40	11	14	44	2.75
	BUK9M24-40E	40	20	24	30	3.4
	BUK9M52-40E	40	40	52	17.6	4.8
	BUK9M7R2-40E	40	5.8	7.2	70	1.89
	BUK9M9R1-40E	40	7.3	9.1	64	2
	BUK9M11-40E	40	9	11	53	2.43

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
TO-220AB (SOT78)	BUK953R5-60E	60	3.4	3.7	120	0.51
	BUK954R8-60E	60	4.5	4.9	100	0.64
D2PAK (SOT404)	BUK7610-55AL	55	10		75	0.5
	BUK9620-55A	55	18	20	54	1.2
	BUK7620-55A	55	20		54	1.2
	BUK9624-55A	55	22	24	46	1.4
	BUK7624-55A	55	24		47	1.4
	BUK9628-55A	55	25	28	42	1.5
	BUK7628-55A	55	28		42	1.5
	BUK9635-55A	55	32	35	34	1.8
	BUK7635-55A	55	35		35	1.7
	BUK9675-55A	55	68	75	20	2.4
	BUK7675-55A	55	75		20.3	2.4

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
D ² PAK (SOT404)	BUK962R5-60E	60	2.3	2.5	120	0.43
	BUK762R4-60E	60	2.4		120	0.43
	BUK962R8-60E	60	2.5	2.8	120	0.46
	BUK762R6-60E	60	2.6		120	0.46
	BUK963R3-60E	60	3	3.3	120	0.51
	BUK763R1-60E	60	3.1		120	0.51
	BUK964R2-60E	60	3.9	4.2	100	0.57
	BUK763R9-60E	60	3.9		100	0.57
	BUK964R8-60E	60	4.4	4.8	100	0.64
	BUK764R4-60E	60	4.5		100	0.64
	BUK966R5-60E	60	5.9	6.5	75	0.82
	BUK766R0-60E	60	6		75	0.82
	BUK969R0-60E	60	8	9	75	1.09
	BUK768R3-60E	60	8.3		75	1.09
	BUK9614-60E	60	13	14	56	1.56
	BUK7613-60E	60	13		58	1.56
DPAK (SOT428)	BUK9212-55B	55	10	12	75	0.95
	BUK7210-55B	55	10		75	0.95
	BUK7212-55B	55	12		75	0.95
	BUK9215-55A	55	14	15	62	1.3
	BUK7215-55A	55	15		62	1.3
	BUK9219-55A	55	18	19	55	1.3
	BUK7219-55A	55	19		55	1.3
	BUK9222-55A	55	20	22	48	1.5
	BUK9225-55A	55	22	25	43	1.6
DPAK (SOT428)	BUK7222-55A	55	22		48	1.5
	BUK7225-55A	55	25		43	1.6
	BUK9230-55A	55	27	30	38	1.7
	BUK7230-55A	55	30		38	1.7
	BUK9237-55A	55	33	37	32	1.94
	BUK7237-55A	55	37		32.3	1.9
	BUK9245-55A	55	40	45	28	2.1
	BUK9277-55A	55	69	77	18	2.93
	BUK7277-55A	55	77		18	2.9
	BUK92150-55A	55	125	140	11	4.1
I ² PAK (SOT226)	BUK7E2R6-60E	60	2.6		120	0.43
	BUK7E3R5-60E	60	3.5		120	0.51
	BUK7E4R6-60E	60	4.6		100	0.64
	BUK7E13-60E	60	13		58	1.56

N-channel 55V-60V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
LFPAK56; Power-SO8 (SOT669)	BUK9Y4R8-60E	60	4.1	4.8	100	0.63
	BUK7Y4R8-60E	60	4.8		100	0.63
	BUK9Y6R0-60E	60	5.2	6	100	0.77
	BUK9Y7R2-60E	60	5.6	7.2	100	0.9
	BUK7Y6R0-60E	60	6		100	0.77
	BUK7Y7R2-60E	60	7.2		100	0.9
	BUK9Y8R7-60E	60	7.5	8.7	86	1.02
	BUK7Y8R7-60E	60	8.7		87	1.02
	BUK9Y15-60E	60	13	15	53	1.58
	BUK7Y15-60E	60	15		53	1.59
	BUK9Y25-60E	60	22	25	34	2.31
	BUK7Y25-60E	60	25		34	2.31
	BUK9Y43-60E	60	38	43	22	3.33
	BUK7Y43-60E	60	43		22	3.33
	BUK9Y59-60E	60	52	59	16.7	4.03
	BUK7Y59-60E	60	59		17	4.03
LFPAK56D (SOT1205)	BUK7K12-60E	60	9.3			2.21
	BUK7K13-60E	60	10		40	2.36
	BUK9K12-60E	60	11	12	35	2.21
	BUK9K13-60E	60	12	13	40	2.36
	BUK7K17-60E	60	14		30	2.84
	BUK9K17-60E	60	16	17	26	2.84
	BUK7K35-60E	60	30		20.7	3.96
	BUK9K35-60E	60	32	35	22	3.96
	BUK7K52-60E	60	45		15.4	4.68
	BUK9K52-60E	60	49	55	16	4.68
LFPAK33 (SOT1210)	BUK7M9R9-60E	60	9.9		60	1.89
	BUK9M12-60E	60	11	12	54	1.89
	BUK7M12-60E	60	12		53	2
	BUK9M15-60E	60	13	15	47	2
	BUK7M15-60E	60	15		43	2.43
	BUK9M19-60E	60	17	19	38	2.43
	BUK7M19-60E	60	19		36	2.75
	BUK9M24-60E	60	21	24	32	2.75
	BUK7M33-60E	60	33			3.4
	BUK9M42-60E	60	37	42	22	3.4
	BUK7M42-60E	60	42		20	4.17
	BUK9M53-60E	60	46	53	17	4.17
	BUK7M67-60E	60	67		14	4.8
	BUK9M85-60E	60	73	85	12.8	4.8
	BUK9832-55A/CU	55	29	32		
SOT223	BUK9880-55A/CU	55	73	80		
	BUK7880-55A/CU	55	80			
	BUK98150-55A/CU	55	137	150		
	BUK78150-55A/CU	55	150			

N-channel 75V-80V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
TO-220AB (SOT78)	BUK753R8-80E	80	4		120	0.43
D ² PAK (SOT404)	BUK7613-75B	75	13		75	0.95
	BUK9616-75B	75	14	16	67	0.95
	BUK7623-75A	75	23		53	1.1
	BUK763R8-80E	80	3.8		120	0.43
	BUK964R2-80E	80	4	4.2	120	0.43
	BUK764R2-80E	80	4.2		120	0.46
	BUK964R7-80E	80	4.5	4.7	120	0.46
	BUK769R6-80E	80	9.6		75	0.82
	BUK9611-80E	80	10	11	75	0.82
DPAK (SOT428)	BUK7214-75B	75	14		69	0.95
	BUK9217-75B	75	15	17	64	0.95
	BUK9226-75A	75	25	26	45	1.3
	BUK7226-75A	75	26		45	1
LFPAK56; Power-SO8 (SOT669)	BUK7Y7R8-80E	80	7.8		100	0.63
	BUK9Y8R5-80E	80	8	8.5	100	0.63
	BUK7Y9R9-80E	80	9.9		89	0.77
	BUK9Y11-80E	80	10	11	84	0.77
	BUK9Y14-80E	80	14	15	62	1.02
	BUK7Y14-80E	80	14		65	1.02
	BUK9Y25-80E	80	25	27	37	1.58
	BUK7Y25-80E	80	25		39	1.58
	BUK9Y41-80E	80	41	45	24	2.33
	BUK7Y41-80E	80	41		25	2.31
	BUK9Y72-80E	80	72	78	15	3.33
	BUK7Y72-80E	80	72		16	3.33
	BUK9Y107-80E	80	98	107	11.8	4.03
	BUK7Y98-80E	80	98		12.3	4.03
LFPAK56D (SOT1205)	BUK7K15-80E	80	15		23	2.21
	BUK7K17-80E	80	17		21	2.36
	BUK7K23-80E	80	23		17	2.21
	BUK9K20-80E	80	17	19	23	2.84
	BUK9K22-80E	80	19	22	21	2.36
	BUK9K30-80E	80	26	30	17	2.84
LFPAK33 (SOT1210)	BUK7M17-80E	80	17		43	1.89
	BUK9M23-80E	80	20	23	37	1.89
	BUK7M22-80E	80	22		37	2
	BUK7M27-80E	80	27		30	2.43
	BUK9M28-80E	80	28	28	33	2
	BUK9M35-80E	80	35	35	26	2.43

N-channel 100V automotive power MOSFETs

Package name	Type number	V _{DS} [max] (V)	R _{DS(on)} [max] @ 10 V (mΩ)	R _{DS(on)} [max] @ 5 V (mΩ)	I _D [max] @ 25 °C (A)	R _{th(j-mb)} [max] (K/W)
TO-220AB (SOT78)	BUK755R4-100E	100	5.2		120	0.43
D ² PAK (SOT404)	BUK765R0-100E	100	5		120	0.43
	BUK965R8-100E	100	5.6	5.8	120	0.43
	BUK768R1-100E	100	8.1		100	0.57
	BUK969R3-100E	100	8.9	9.3	100	0.57
	BUK7613-100E	100	13		72	0.82
	BUK9615-100E	100	14	15	66	0.82
	BUK7631-100E	100	31		34	1.56
	BUK9637-100E	100	36	37	31	1.56
	BUK9660-100A	100	58	60	26	1.4
	BUK7660-100A	100	60		26	1.4
	BUK9675-100A	100	72	75	23	1.5
	BUK7675-100A	100	75		23	1.5
	BUK96180-100A	100	173	180	11	2.8
DPAK (SOT428)	BUK7227-100B	100	27		48	0.95
	BUK9230-100B	100	28	30	47	0.95
	BUK9240-100A	100	39	40	33	1.3
	BUK7240-100A	100	40		34	1.3
	BUK9275-100A	100	72	75	21.7	1.7
	BUK7275-100A	100	75		21.7	1.7
I ² PAK (SOT226)	BUK7E5R2-100E	100	5.2		120	0.43
LFPAK56; Power-SO8 (SOT669)	BUK9Y12-100E	100	12	12	85	0.63
	BUK7Y12-100E	100	12		85	0.63
	BUK9Y15-100E	100	15	15	69	0.77
	BUK7Y15-100E	100	15		68	0.77
	BUK9Y19-100E	100	18	19	56	0.9
	BUK7Y19-100E	100	19		56	0.9
	BUK9Y22-100E	100	22	22	49	1.02
	BUK7Y22-100E	100	22		49	1.02
	BUK9Y38-100E	100	38	38	30	1.58
	BUK7Y38-100E	100	38		30	1.58
	BUK9Y65-100E	100	64	65	19	2.31
	BUK7Y65-100E	100	65		19	2.31
	BUK9Y113-100E	100	110	113	12	3.33
	BUK7Y113-100E	100	113		12	3.33
	BUK9Y153-100E	100	146	153	9.4	4.03
	BUK7Y153-100E	100	153		9.4	4.03

N-channel 100V automotive power MOSFETs

Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	$R_{DS(on)}$ [max] @ 5 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK56D (SOT1205)	BUK7K29-100E	100	25		29.5	2.21
	BUK9K29-100E	100	27	29	30	2.21
	BUK7K32-100E	100	28		29	2.36
	BUK9K32-100E	100	31	33	26	2.36
	BUK7K45-100E	100	38		21.4	2.84
	BUK9K45-100E	100	42	45	21	2.84
	BUK7K89-100E	100	83		13	3.96
	BUK9K89-100E	100	85	89	12.5	3.96
	BUK7K134-100E	100	121		9.8	4.68
	BUK9K134-100E	100	154	159	8.5	4.68
LFPAK33 (SOT1210)	BUK9M34-100E	100	34	34	29	1.89
	BUK9M43-100E	100	43	44	26	1.88
	BUK9M120-100E	100	119	120	11.5	3.4
	BUK9M156-100E	100	150	156	9.3	4.17
SOT223	BUK98180-100A/CU	100	173	180	4.6	
	BUK9875-100A/CU	101	72	75	7	

P-channel 30V-60V automotive power MOSFETs

Types in **bold** represent new products


Package name	Type number	V_{DS} [max] (V)	$R_{DS(on)}$ [max] @ 10 V (mΩ)	I_D [max] @ 25 °C (A)	$R_{th(j-mb)}$ [max] (K/W)
LFPAK56	BUK6Y12-30P	30	12	67.3	1.4
	BUK6Y20-30P	30	20	41.1	2.3
	BUK6Y15-40P	40	15	63.1	1.4
	BUK6Y25-40P	40	25	39.4	2.3
	BUK6Y32-60P	60	32	38.7	1.4
	BUK6Y57-60P	60	57	22.7	2.3

Automotive MOSFETs

Small-signal automotive MOSFETs – Low $R_{DS(on)}$

Package										
Size (mm)										
P_{tot} (mW)										
Polarity	V_{DS} (V)	V_{GS} (V)	I_D (A)	$V_{GS(th)}$ min (V)	$V_{GS(th)}$ max (V)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ $V_{GS} =$			
				10 V	4.5 V	2.5 V	10 V	4.5 V	2.5 V	1.8 V
N-channel	20	8	4.7	0.45	1	2	-	24	29	40
			2	0.45	1	2	-	57	64	78
			2.8	0.4	1	2	-	64	78	110
		12	12.9	0.4	0.9	2	-	10	12	16
			11.4	0.4	0.9	2	-	12	15	20
			6.3	0.75	1.25	2	-	16	24	-
	30	12	11.3	0.4	0.9	2	-	13	14	17
			5	0.4	0.9	2	-	28	32	37
			4	0.75	1.25	2	-	55	72	-
		20	0.9	0.75	1.25	2	-	212	269	-
			5.5	1	2.5	2	17	22	-	-
			3.9	1	2.5	2	30	39	-	-
	40	15	3.7	1	2.5	2	54	70	-	-
			7	1.4	2.1	0.5	-	18	22	-
			19	1	2	-	-	23	-	-
		20	7	2.4	4	0.5	19	-	-	-
			2.7	1	2.5	1	64	79	-	-
			2.5	1	2.5	1	95	120	-	-
	60	20	19	1.3	2.7	-	23	30	-	-
			19	2.4	4	-	25	-	-	-
			5	1.3	2.7	0.5	32	38	-	-
		20	4	1.3	2.7	2	42	49	-	-
			3.1	1.3	2.7	2	46	52	-	-
			3	1.3	2.7	2	72	85	-	-
	80	20	2.1	1.3	2.7	2	96	108	-	-
			1.5	1.3	2.7	2	176	196	-	-
			0.8	1.3	2.7	2	300	332	-	-
		20	13	1.3	2.7	-	43	53	-	-
			2.8	1.3	2.7	2	80	92	-	-
			1.9	1.3	2.7	2	175	195	-	-
	100	20	1.1	1.3	2.7	2	345	390	-	-
			1.5	1.3	2.7	2	285	301	-	-
			1.1	1.3	2.7	2	527	555	-	-
P-channel	12	12	11.8	0.47	0.9	-	-	15	17	21
			5.6	0.45	0.95	2	-	27	38	50
		8	6	0.45	0.95	2	-	37	45	59
			2	0.5	1.1	-	-	100	155	210
			2.3	0.45	0.95	-	-	120	150	200
		20	10.3	0.47	0.9	2	-	19	22	28
			5.7	0.75	1.25	2	-	27	39	-
			5	0.47	0.9	2,3	-	28	31	36
			5.3	0.75	1.25	2	-	28	42	-
			5	0.47	0.9	2	-	39	45	56
			5.7	0.75	1.25	2	-	41	56	-
	30	12	3.5	0.75	1.25	-	-	48	71	-
			3.3	0.75	1.25	2	-	67	99	-
			4.1	0.75	1.25	2	-	70	101	-
		20	2.4	1	2.5	2	-	97	147	-
			8.8	1	2.5	-	24	32	-	-
			4.2	1	3	2	35	47	-	-
	40	20	1.5	1	2.5	1	180	220	-	-
			5	1.5	3	1	32	42	-	-
		20	14	1.4	2.7	-	43	70	-	-
			60	20	8	3,2	0,5	95	125	-
	70	20	2.3	1	3	2	156	177	-	-

Types in **bold** represent new products

SOT223	SOT457 (SC-74)	SOT23	DFN2020MD-6 (SOT1220)	DFN2020D-6 (SOT1118D)	DFN1010D-3 (SOT1215)
					
6.5 x 3.5 x 1.65	2.9 x 1.5 x 1.0	2.9 x 1.3 x 1.0	2.0 x 2.0 x 0.65	2.0 x 2.0 x 0.65	1.1 x 1.0 x 0.37
1700	600	250	1250	1250	1000
		PMV28UNEAA			
		PMV65UNEAA			
		PMPB10XNEAA			
		PMPB12UNEAA			
		PMV20XNEAA	PMPB20XNEAA		
		PMPB13XNEAA			
		PMPB29XNEAA			
			PMDPB56XNEAA		
		PMV25ENEAA			
		PMV50ENEAA			
		PMV100ENEAA			
			BUK9D23-40E		
		PMV65ENEAA			
		PMV130ENEAA	BUK6D23-40E		
			BUK7D25-40E		
			PMPB55ENEAA		
		PMV55ENEAA			
		PMPB85ENEAA			
		PMV120ENEAA			
		PMV230ENEAA			
		PMV450ENEAA	BUK6D43-60E		
		PMPB95ENEAA			
		PMPB215ENEAA			
				PMXB360ENEAA	
PMT280ENEAA		PMV280ENEAA			
PMT560ENEAA			PMPB15XPA		
		PMV27UPEA			
		NX2301P			
		BSH205G2			
			PMPB20XPEA		
PMN27XPEA			PMPB29XPEA		
		PMV30XPEA			
			PMPB43XPEA		
PMN42XPEA		PMV48XPA			
		PMV65XPEA			
		PMV100XPEA	PMPB27EPA		
		PMV50EPEA			
		PMV250EPEA			
			PMPB45EPA		
			BUK6D43-40P		
			BUK6D120-60P		

Automotive MOSFETs

Small-signal automotive MOSFETs – High R_{DS(on)}

Package											
Size (mm)											
P _{tot} (mW)											
Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =	10 V			
								4.5 V	2.5 V	1.8 V	
N	30	8	0.4	0.6	1.1	2	-	1000	1400	2000	
			0.36	0.9	1.5	-	900	1000	-	-	
			0.36	0.48	1.6	1.5	1000	1100	1400	-	
			0.3	1	2.5	2	1000	1300	-	-	
			0.3	1	2.5	3	1100	1300	-	-	
			0.2	0.8	1.5	yes	2700	3000	4000	-	
P	30	8	0.23	0.6	1.1	2	-	2800	5300	-	
	50	20	0.2	1.1	2.1	1	5300	6000	-	-	

Small-signal automotive MOSFETs – Dual

Package											
Size (mm)											
P _{tot} (mW)											
Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)	ESD protection (kV)	R _{DS(on)} typ (mΩ) @ V _{GS} =	10 V			
								4.5 V	2.5 V	1.8 V	
N	20	8	0.8	0.5	0.95	2	-	380	620	1100	
			4	0.75	1.25	2	-	55	72	-	
			0.95	0.75	1.25	2	-	211	267	-	
P	20	8	0.55	0.5	1.3	2	-	670	1200	1800	
N	20	8	0.73	0.5	0.95	2	-	290	420	600	
P			0.5	0.5	1.3	2	-	670	1200	1800	

Small-signal MOSFETs complementary

Package	Type	Polarity	V _{DS} (V)	V _{GS} (V)	I _D (A)	V _{GS(th)} min (V)	V _{GS(th)} max (V)
 SOT666 (1.6 x 1.2 x 0.55)	NX1029X	N	60	20	0.33	1.1	2.1
		P	50	20	0.17	1.1	2.1
	NX3008CBKV	N	30	8	0.4	0.6	1.1
		P	30	8	0.22	0.6	1.1
	PMDT290UCE	N	20	8	0.8	0.5	0.95
		P	20	8	0.55	0.5	1.3
	NX3008CBKS	N	30	8	0.35	0.6	1.1
		P	30	8	0.2	0.6	1.1

SOT23	SOT363 (SC-88)	SOT323 (SC-70)	SOT666	DFN1006 (SOT883)
				
2.9 x 1.3 x 1.0	2.0 x 1.25 x 0.95	2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	1.0 x 0.6 x 0.5
250	300	200	300	250
NX3008NBK	NX3008NBKS	NX3008NBKW	NX3008NBKV	
BSS138P	BSS138PS	BSS138PW		
BSS138BK	BSS138BKS	BSS138BKW		
2N7002BK	2N7002BKS	2N7002BKW		2N7002BKM
2N7002CK				
BSS138AKA				
NX3008PBK	NX3008PBKS	NX3008PBKW	NX3008PBKV	
BSS84AK	BSS84AKS	BSS84AKW	BSS84AKV	BSS84AKM

SOT363 (SC-88)	SOT666	DFN2020D-6 (SOT1118D)
		
2.0 x 1.25 x 0.95	1.6 x 1.2 x 0.55	2.0 x 2.0 x 0.65
300	300	1250
	PMDT290UNE	
PMGD175XNEA		PMDPB56XNEA
	PMDT670UPE	
PMGD290UCEA		

t_{on} typ (ns)	t_{off} typ (ns)	Q_g typ (nC)	ESD protection (kV)	$R_{DS(on)}$ typ (mΩ) @ $V_{GS} =$			
				10 V	4.5 V	2.5 V	1.8 V
11	19	0.5	2	1000	1300	-	-
24	73	0.26	1	4500	5100	-	-
26	88	0.52	2	-	1000	1400	2000
49	103	0.55	2	-	2800	5300	-
10	117	0.45	2	-	290	420	600
48	152	0.76	2	-	670	1200	1800
26	88	0.52	2	-	1000	1400	2000
49	103	0.55	2	-	2800	5300	-

AIRBAG

Logic

5

Automotive standard logic	80
Analog switches.....	80
Buffers/Inverters	81
Counters/Frequency dividers	83
Bus switches.....	84
Digital decoders/Demultiplexers.....	84
Digital multiplexers.....	85
Flip-flops	85
Gates.....	87
Latches/Registered drivers.....	89
Level shifters/Translators	90
Multivibrators.....	90
Schmitt-triggers.....	91
Shift registers.....	92
Transceivers.....	94
Automotive mini logic	95
Analog switches.....	95
Bus switches.....	95
Buffers/Inverters	96
Digital decoders/Demultiplexers.....	98
Digital multiplexers.....	98
Flip-flops	98
Gates.....	99
Latches/Registered drivers.....	100
Multivibrators.....	101
Schmitt-triggers.....	101
Level shifters/Translators	102

Automotive standard logic

Analog switches

Type number	Description	Features					Package (suffix)							
		Configuration	V _{cc} (V)	R _{ON} (Ω)	R _{ON} (FLAT) (Ω)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT137-1 (D)	SOT355-1 (PW)
74HC4051-Q100	Single-pole, octal-throw analog switch	SP8T-Z	2.0 - 10.0	200	20	-40~125				•	•	•		
74HCT4051-Q100	Single-pole, octal-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	225	20	-40~125				•	•	•		
74HC4052-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	2.0 - 10.0	200	20	-40~125				•	•	•		
74HCT4052-Q100	Dual single-pole, quad-throw analog switch; TTL-enabled	SP4T-Z	4.5 - 5.5	200	20	-40~125				•	•	•		
74HC4053-Q100	Triple single-pole, double-throw analog switch	SP8T-Z	2.0 - 10.0	200	20	-40~125				•	•	•		
74HCT4053-Q100	Triple single-pole, double-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	200	20	-40~125				•	•	•		
74HC4066-Q100	Quad single-pole, single-throw analog switch	SPST-NO	2.0 - 10.0	105	23	-40~125	•	•	•					
74HCT4066-Q100	Quad single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125	•	•	•					
74HC4067-Q100	Single-pole, 16-throw analog switch	SP16T-Z	2.0 - 10.0	200	25	-40~125						•	•	•
74HCT4067-Q100	Single-pole, 16-throw analog switch; TTL-enabled	SP16T-Z	4.5 - 5.5	225	25	-40~125						•	•	•
74HC4851-Q100	Single-pole, octal-throw analog switch	SP8T-Z	2.0 - 10.0	220	-	-40~125				•	•	•		
74HCT4851-Q100	Single-pole, octal-throw analog switch; TTL-enabled	SP8T-Z	4.5 - 5.5	240	-	-40~125				•	•	•		
74HC4852-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	2.0 - 10.0	220	-	-40~125				•	•	•		
74HCT4852-Q100	Dual single-pole, quad-throw analog switch; TTL-enabled	SP4T-Z	4.5 - 5.5	240	-	-40~125				•	•	•		
74LV4052-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	1.0 - 6.0	125	15	-40~125				•	•			
74LV4053-Q100	Triple single-pole, double-throw analog switch	SPDT-Z	1.0 - 6.0	150	30	-40~125				•	•	•		
74LVC4066-Q100	Quad single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125	•	•	•					
HEF4051B-Q100	Single-pole, octal-throw analog switch	SP8T-Z	3.0 - 15	175	30	-40~85				•	•			
HEF4052B-Q100	Dual single-pole, quad-throw analog switch	SP4T-Z	3.0 - 15	175	30	-40~85				•	•			
HEF4053B-Q100	Triple single-pole, double-throw analog switch	SPDT-Z	3.0 - 15	175	30	-40~85				•	•			
HEF4066B-Q100	Quad single-pole, single-throw analog switch	SPST-NO	3.0 - 15	175	20	-40~85	•							
HEF4067B-Q100	Single-pole, 16-throw analog switch	SP16T-Z	3.0 - 15	175	20	-40~85							•	

Buffers/Inverters

Type number	Description	Features				Package (suffix)							
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)
74AHC04-Q100	Hex inverter	2.0 - 5.5	± 8	3.0	-40~125	•	•	•					
74AHCT04-Q100	Hex inverter; TTL-enabled	4.5 - 5.5	± 8	3.0	-40~125	•	•	•					
74AHC125-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.0	-40~125	•	•	•					
74AHCT125-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•					
74AHC126-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.3	-40~125	•	•	•					
74AHCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•					
74AHC240-Q100	Octal inverter/line driver (3-state)	2.0 - 5.5	± 8	2.8	-40~125					•	•	•	
74AHCT240-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125					•	•	•	
74AHC244-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125					•	•	•	
74AHCT244-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125					•	•	•	
74AHCS41-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125					•	•	•	
74AHCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125					•	•	•	
74AHCU04-Q100	Hex inverter; unbuffered	2.0 - 5.5	± 8	2.4	-40~125	•	•	•					
74ALVC125-Q100	Quad buffer/line driver (3-state)	1.65 - 3.6	± 24	1.8	-40~85	•	•	•					
74ALVC541-Q100	Octal buffer/line driver (3-state)	1.65 - 3.6	± 24	2.3	-40~85					•	•	•	
74HC05-Q100	Hex inverter; open-drain	2.0 - 6.0	5.2	11	-40~125	•	•	•					
74HC04-Q100	Hex inverter	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•					
74HCT04-Q100	Hex inverter; TTL-enabled	4.5 - 5.5	± 4.0	8.0	-40~125	•	•	•					
74HC125-Q100	Quad buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125	•	•						
74HCT125-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	12	-40~125	•	•						
74HC126-Q100	Quad buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125	•	•						
74HCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125	•	•						
74HC240-Q100	Octal inverter/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125					•	•	•	
74HCT240-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	9.0	-40~125					•	•	•	
74HC244-Q100	Octal buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125					•	•	•	
74HCT244-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125					•	•	•	
74HC365-Q100	Hex buffer/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125				•	•			
74HCT365-Q100	Hex buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125				•	•			
74HC366-Q100	Hex inverter/line driver (3-state)	2.0 - 6.0	± 7.8	10	-40~125				•	•			
74HCT366-Q100	Hex inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125				•	•			
74HC540-Q100	Octal inverter/line driver (3-state)	2.0 - 6.0	± 7.8	9.0	-40~125						•		
74HCT540-Q100	Octal inverter/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	11	-40~125						•		
74HC541-Q100	Octal buffer/line driver (3-state)	2.0 - 6.0	± 7.8	10	-40~125					•	•		

Buffers/Inverters

Type number	Description	Features				Package (suffix)							
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)
74HCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 6	12	-40~125					•	•		
74HCU04-Q100	Hex inverter; unbuffered	2.0 - 6.0	± 5.2	5.0	-40~125	•	•	•					
74LV244-Q100	Octal buffer/line driver (3-state)	1.0 - 5.5	± 16	8.0	-40~125					•	•		
74LVC04A-Q100	Hex inverter	1.65 - 5.5	± 24	2.0	-40~125	•	•	•					
74LVC06A-Q100	Hex inverter; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•	•					
74LVC07A-Q100	Hex buffer; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•	•					
74LVC125A-Q100	Quad buffer/line driver (3-state)	1.2 - 3.6	± 24	2.4	-40~125	•	•	•					
74LVC126A-Q100	Quad buffer/line driver (3-state)	1.2 - 3.6	± 24	2.4	-40~125	•	•	•					
74LVC541A-Q100	Octal buffer/line driver (3-state)	1.2 - 3.6	± 24	3.3	-40~125					•	•	•	
74LVC16240A-Q100	16-bit inverter/line driver (3-state)	1.2 - 3.6	± 24	2.7	-40~125							•	
74LVC244A-Q100	Octal buffer/line driver (3-state)	1.2 - 3.6	± 24	2.8	-40~125					•	•	•	
74LVCH244A-Q100	Octal buffer/line driver with bus hold (3-state)	1.2 - 3.6	± 24	2.8	-40~125					•	•	•	
74LVC16244A-Q100	16-bit buffer/line driver (3-state)	1.2 - 3.6	± 24	3.0	-40~125								•
74LVCH16244A-Q100	16-bit buffer/line driver with bus hold (3-state)	1.2 - 3.6	± 24	3.0	-40~125								•
74LVCU04A-Q100	Hex inverter; unbuffered	1.2 - 3.6	± 24	2.0	-40~125	•	•						
74LVT04-Q100	Hex inverter	2.7 - 3.6	-20 / +32	2.6	-40~85	•	•						
74LVT244A-Q100	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	-32 / +64	2.6	-40~85					•	•		
74LVTH244A-Q100	Octal buffer/line driver with bus hold (3-state)	2.7 - 3.6	-32 / +64	2.6	-40~85					•	•		
74VHC126-Q100	Quad buffer/line driver (3-state)	2.0 - 5.5	± 8	3.3	-40~125	•	•	•					
74VHCT126-Q100	Quad buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.0	-40~125	•	•	•					
74VHCS541-Q100	Octal buffer/line driver (3-state)	2.0 - 5.5	± 8	3.5	-40~125					•	•	•	
74VHCT541-Q100	Octal buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.5	-40~125					•	•	•	
HEF4049B-Q100	Hex inverter/line driver	3.0 - 15.0	-3 / +20	20	-40~85				•				
HEF4050B-Q100	Hex buffer/line driver	3.0 - 15.0	-3 / +20	40	-40~85				•				
HEF4069UB-Q100	Hex inverter; unbuffered	3.0 - 15.0	± 3.4	15	-40~85	•	•						

Counters/Frequency dividers

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)					
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74HC161-Q100	Presettable synchronous 4-bit binary counter; asynchronous reset	2.0 - 6.0	± 5.2	19	-40~125				•	•	
74HC163-Q100	Presettable synchronous 4-bit binary counter; synchronous reset	2.0 - 6.0	± 5.2	17	-40~125				•	•	
74HCT163-Q100	Presettable synchronous 4-bit binary counter; synchronous reset; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125				•	•	
74HC193-Q100	Presettable synchronous 4-bit binary up/down counter	2.0 - 6.0	± 5.2	20	-40~125				•	•	
74HCT193-Q100	Presettable synchronous 4-bit binary up/down counter; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125				•	•	
74HC393-Q100	Dual 4-bit binary ripple counter	2.0 - 6.0	± 5.2	12	-40~125	•	•	•			
74HCT393-Q100	Dual 4-bit binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	20	-40~125	•	•	•			
74HC4017-Q100	Johnson decade counter with 10 decoded outputs	2.0 - 6.0	± 5.2	18	-40~125				•	•	•
74HCT4017-Q100	Johnson decade counter with 10 decoded outputs; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125				•		•
74HC4020-Q100	14-stage binary ripple counter	2.0 - 6.0	± 5.2	11	-40~125				•	•	•
74HCT4020-Q100	14-stage binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	15	-40~125				•	•	•
74HC4024-Q100	7-stage binary ripple counter	2.0 - 6.0	± 5.2	14	-40~125	•					
74HC4040-Q100	12-stage binary ripple counter	2.0 - 6.0	± 5.2	14	-40~125				•	•	•
74HCT4040-Q100	12-stage binary ripple counter; TTL-enabled	4.5 - 5.5	± 4.0	16	-40~125				•	•	•
74HC4060-Q100	14-stage binary ripple counter with oscillator	2.0 - 6.0	± 5.2	31	-40~125				•	•	•
74HCT4060-Q100	14-stage binary ripple counter with oscillator; TTL-enabled	4.5 - 5.5	± 4.0	31	-40~125				•		•
74HC4520-Q100	Dual 4-bit synchronous binary counter	2.0 - 6.0	± 5.2	24	-40~125				•		
74HCT4520-Q100	Dual 4-bit synchronous binary counter; TTL-enabled	4.5 - 5.5	± 4.0	24	-40~125				•		
74LV393-Q100	Dual 4-bit binary ripple counter	1.0 - 3.6	± 6	12	-40~125	•	•				
HEF4017B-Q100	5-stage Johnson decade counter	3.0 - 15	± 2.4	40	-40~85				•		
HEF4020B-Q100	14-stage binary ripple counter	3.0 - 15	± 2.4	30	-40~85				•		
HEF4040B-Q100	12-stage binary ripple counter	3.0 - 15	± 2.4	35	-40~85				•		
HEF4060B-Q100	14-stage binary ripple counter with oscillator	3.0 - 15	± 2.4	50	-40~85				•		
HEF4541B-Q100	Programmable timer	3.0 - 15	- 4/+ 2.7	38	-40~85	•					
HEF4520B-Q100	Dual 4-bit synchronous binary counter	3.0 - 15	± 2.4	15	-40~85				•		

Bus switches

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)					
		V _{CC} (V)	V _{PASS} (V)	R _{ON} (Ω)	T _{amb} (°C)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)
74CBTLV3125-Q100	Quad bus switch	2.3 - 3.6	3.3	7	-40~125	•					
74CBTLV3126-Q100	Quad bus switch	2.3 - 3.6	3.3	7	-40~125	•	•				
74CBTLV3253-Q100	Dual 4:1 mux/demux	2.3 - 3.6	3.3	7	-40~125		•	•	•		
74CBTLV3257-Q100	Quad 2:1 mux/demux	2.3 - 3.6	3.3	7	-40~125		•	•	•		
74CBTLV3245-Q100	Octal bus switch	2.3 - 3.6	3.3	7	-40~125					•	•
74CBTLVD3245-Q100	Octal bus switch level translator	3.0 - 3.6	1.8	7	-40~125					•	•
CBT3245A-Q100	Octal bus switch	4.5 - 5.5	3.9	7	-40~85					•	•

Digital decoders/Demultiplexers

Type number	Description	Features				Package (suffix)		
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74AHC138-Q100	3-to-8 line decoder/demultiplexer; inverting	2.0 - 5.5	± 8	4.4	-40~125	•	•	•
74AHCT138-Q100	3-to-8 line decoder/demultiplexer; inverting; TTL-enabled	4.5 - 5.5	± 8	4.4	-40~125	•	•	•
74AHC139-Q100	Dual 2-to-4 line decoder/demultiplexer	2.0 - 5.5	± 8	3.9	-40~125	•	•	
74AHCT139-Q100	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•	
74HC237-Q100	3-to-8 decoder/demultiplexer with address latches	2.0 - 6.0	± 5.2	18	-40~125	•		
74HC138-Q100	3-to-8 line decoder/demultiplexer; inverting	2.0 - 6.0	± 5.2	12	-40~125		•	•
74HCT138-Q100	3-to-8 line decoder/demultiplexer; inverting; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•	•
74HC139-Q100	Dual 2-to-4 line decoder/demultiplexer	2.0 - 6.0	± 5.2	14	-40~125	•	•	
74HCT139-Q100	Dual 2-to-4 line decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 4	16	-40~125	•	•	
74HC238-Q100	3-to-8 decoder/demultiplexer	2.0 - 6.0	± 5.2	14	-40~125	•	•	•
74HCT238-Q100	3-to-8 decoder/demultiplexer; TTL-enabled	4.5 - 5.5	± 4	18	-40~125	•	•	•
74LVC138A-Q100	3-to-8 line decoder/demultiplexer; inverting	1.2 - 3.6	± 24	2.7	-40~125	•	•	•
HEF4555B-Q100	Dual 1-to-4 line decoder/demultiplexer	3.0 - 15	± 2.4	30	-40~85	•		

Digital multiplexers

Type number	Description	Features					Package (suffix)		
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	
74AHC157-Q100	Quad 2-input multiplexer	2.0 - 5.5	± 8	3.2	-40~125	•	•	•	
74AHCT157-Q100	Quad 2-input multiplexer; TTL-enabled	4.5 - 5.5	± 8	3.2	-40~125	•	•	•	
74AHC257-Q100	Quad 2-input multiplexer (3-State)	2.0 - 5.5	± 8	2.9	-40~125	•	•		
74AHCT257-Q100	Quad 2-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 8	3.7	-40~125	•	•		
74HC151-Q100	8-input multiplexer	2.0 - 6.0	± 5.2	17	-40~125	•	•		
74HCT151-Q100	8-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•		
74HC153-Q100	Dual 4-input multiplexer	2.0 - 6.0	± 5.2	17	-40~125	•	•		
74HCT153-Q100	Dual 4-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	19	-40~125	•	•		
74HC157-Q100	Quad 2-input multiplexer	2.0 - 6.0	± 5.2	11	-40~125	•	•	•	
74HCT157-Q100	Quad 2-input multiplexer; TTL-enabled	4.5 - 5.5	± 4	13	-40~125	•	•	•	
74HC251-Q100	8-input multiplexer (3-State)	2.0 - 6.0	± 5.2	18	-40~125	•	•		
74HCT251-Q100	8-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 4	22	-40~125	•	•		
74HC253-Q100	Dual 4-input multiplexer (3-State)	2.0 - 6.0	± 7.8	17	-40~125	•			
74HCT253-Q100	Dual 4-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 6	17	-40~125	•			
74HC257-Q100	Quad 2-input multiplexer (3-State)	2.0 - 6.0	± 7.8	11	-40~125	•	•		
74HCT257-Q100	Quad 2-input multiplexer; TTL-enabled (3-State)	4.5 - 5.5	± 6	13	-40~125	•	•		
74LVC157A-Q100	Quad 2-input multiplexer	1.2 - 3.6	± 24	2.5	-40~125	•	•	•	

Flip-flops

Type number	Description	Features					Package (suffix)								
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)	SOT362-1 (DGG)
74AHC74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 5.5	± 8	3.7	-40~125	•	•	•							
74AHCT74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•							
74AHC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 5.5	± 8	4.2	-40~125					•	•	•			
74AHCT273-Q100	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125					•	•	•			
74AHC374-Q100	Octal D-type flip-flop; positive-edge trigger	2.0 - 5.5	± 8	4.4	-40~125					•	•				
74AHCT374-Q100	Octal D-type flip-flop; positive-edge trigger (3-state); TTL-enabled (3-state)	4.5 - 5.5	± 8	4.3	-40~125					•	•				
74AHC377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 5.5	± 8	3.9	-40~125							•			
74AHCT377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125						•	•			
74AVC16374-Q100	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 12	1.5	-40~85										•

Flip-flops

Type number	Description	Features				Package (suffix)									
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)	SOT362-1 (DGG)
74HC74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	± 5.2	14	-40~125		•	•							
74HCT74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	15	-40~125	•	•	•							
74HC107-Q100	Dual J-K flip-flop with reset; negative-edge trigger	2.0 - 6.0	± 5.2	16	-40~125	•	•								
74HCT107-Q100	Dual J-K flip-flop with reset; negative-edge trigger; TTL-enabled	4.5 - 5.5	± 4	16	-40~125	•									
74HC109-Q100	Dual J-K flip-flop with set and reset; positive-edge trigger	2.0 - 6.0	± 5.2	15	-40~125				•						
74HCT109-Q100	Dual J-K flip-flop with set and reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125				•						
74HC174-Q100	Hex D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	17	-40~125				•	•					
74HCT174-Q100	Hex D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	18	-40~125				•	•					
74HC175-Q100	Quad D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	17	-40~125				•	•					
74HCT175-Q100	Quad D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	16	-40~125				•	•					
74HC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	2.0 - 6.0	± 5.2	15	-40~125						•	•	•		
74HCT273-Q100	Octal D-type flip-flop with reset; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 4	15	-40~125						•	•	•		
74HC377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger	2.0 - 6.0	± 7.8	13	-40~125						•	•			
74HCT377-Q100	Octal D-type flip-flop with data enable; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 6	14	-40~125						•	•			
74HC574-Q100	Octal D-type flip-flop; positive-edge trigger (3-state)	2.0 - 6.0	± 7.8	14	-40~125						•	•			
74HCT574-Q100	Octal D-type flip-flop; positive-edge trigger; TTL-enabled (3-state)	4.5 - 5.5	± 6	15	-40~125						•	•			
74LV74-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	1.0 - 5.5	± 12	11	-40~125	•	•								
74LVC74A-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	1.2 - 3.6	± 24	2.5	-40~125	•	•	•							
74LVC273-Q100	Octal D-type flip-flop with reset; positive-edge trigger	1.2 - 3.6	± 24	6.0	-40~125						•	•	•		
74LVC374A-Q100	Octal D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	2.7	-40~125						•	•	•		

Flip-flops

Type number	Description	Features				Package (suffix)								
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT815-1 (BQ)
74LVC573A-Q100	Octal D-type transparent latch (3-state)	1.2 - 3.6	± 24	3.4	-40~125					•	•	•		
74LVC823A-Q100	9-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	5.4	-40~125								•	
74LVC16374A-Q100	16-bit D-type flip-flop; positive-edge trigger (3-state)	1.2 - 3.6	± 24	3.8	-40~125									•
74LVCH16374A-Q100	16-bit D-type flip-flop with bus hold; positive-edge trigger (3-state)	1.2 - 3.6	± 24	3.8	-40~125									•
HEF4013B-Q100	Dual D-type flip-flop with set and reset; positive-edge trigger	3.0 - 15	± 2.4	30	-40~85	•	•							
HEF4027B-Q100	Dual J-K flip-flop	3.0 - 15	± 2.4	30	-40~85			•						

Gates

Type number	Description	Features				Package (suffix)		
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74AHC00-Q100	Quad 2-input NAND gate	2.0 - 5.5	± 8	3.2	-40~125	•	•	•
74AHCT00-Q100	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•
74AHC02-Q100	Quad 2-input NOR gate	2.0 - 5.5	± 8	2.9	-40~125	•	•	•
74AHCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125	•	•	•
74AHC08-Q100	Quad 2-input AND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	•
74AHCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74AHC30-Q100	8-input NAND gate	2.0 - 5.5	± 8	3.6	-40~125	•	•	•
74AHCT30-Q100	8-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•	•
74AHC32-Q100	Quad 2-input OR gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	•
74AHCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74AHC86-Q100	Quad 2-input EXCLUSIVE-OR gate	2.0 - 5.5	± 8	3.4	-40~125	•	•	•
74AHCT86-Q100	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•	•
74ALVC00-Q100	Quad 2-input NAND gate	1.65 - 3.6	± 24	2.1	-40~85	•	•	•

Gates

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)		
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74ALVC32-Q100	Quad 2-input OR gate	1.65 - 3.6	± 24	2.0	-40~125	•	•	•
74HC00-Q100	Quad 2-input NAND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT00-Q100	Quad 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	•
74HC02-Q100	Quad 2-input NOR gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	9.0	-40~125	•	•	•
74HC03-Q100	Quad 2-input NAND gate; open-drain	2.0 - 6.0	5.2	8.0	-40~125	•	•	
74HCT03-Q100	Quad 2-input NAND gate; open-drain; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	
74HC08-Q100	Quad 2-input AND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•	•
74HCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	•
74HC10-Q100	Triple 3-input NAND gate	2.0 - 6.0	± 5.2	9.0	-40~125	•	•	
74HCT10-Q100	Triple 3-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	
74HC11-Q100	Triple 3-input AND gate	2.0 - 6.0	± 5.2	10	-40~125	•	•	
74HCT11-Q100	Triple 3-input AND gate; TTL-enabled	4.5 - 5.5	± 4	11	-40~125	•	•	
74HC20-Q100	Dual 4-input NAND gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	
74HCT20-Q100	Dual 4-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	13	-40~125	•		•
74HC27-Q100	Triple 3-input NOR gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	•
74HCT27-Q100	Triple 3-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	•
74HC30-Q100	8-input NAND gate	2.0 - 6.0	± 5.2	12	-40~125	•	•	
74HCT30-Q100	8-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125	•	•	
74HC32-Q100	Quad 2-input OR gate	2.0 - 6.0	± 5.2	6.0	-40~125	•	•	•
74HCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 4.0	9.0	-40~125	•	•	•
74HC86-Q100	Quad 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 5.2	11	-40~125	•	•	
74HCT86-Q100	Quad 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 4	14	-40~125	•	•	
74HC4002-Q100	Dual 4-input NOR gate	2.0 - 6.0	± 5.2	9.0	-40~125	•	•	
74HC4075-Q100	Triple 3-input OR gate	2.0 - 6.0	± 5.2	8.0	-40~125	•	•	
74HCT4075-Q100	Triple 3-input OR gate; TTL-enabled	4.5 - 5.5	± 4	10	-40~125	•	•	
74LV08-Q100	Quad 2-input AND gate	1.0 - 5.5	± 12	7.0	-40~125	•	•	
74LVC00A-Q100	Quad 2-input NAND gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC02A-Q100	Quad 2-input NOR gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC08A-Q100	Quad 2-input AND gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74LVC11-Q100	Triple 3-input AND gate	1.2 - 3.7	± 24	3.7	-40~125	•	•	
74LVC32A-Q100	Quad 2-input OR gate	1.2 - 3.6	± 24	2.1	-40~125	•	•	•
74VHC02-Q100	Quad 2-input NOR gate	2.0 - 5.5	± 8	2.9	-40~125	•	•	•
74VHCT02-Q100	Quad 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125	•	•	•

Gates

Type number	Description	Features				Package (suffix)		
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)
74VHC08-Q100	Quad 2-input AND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	
74VHCT08-Q100	Quad 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74VHC32-Q100	Quad 2-input OR gate	2.0 - 5.5	± 8	3.5	-40~125	•	•	
74VHCT32-Q100	Quad 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
HEF4001B-Q100	Quad 2-input NOR gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4011B-Q100	Quad 2-input NAND gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4030B-Q100	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	± 2.4	30	-40~85	•		
HEF4070B-Q100	Quad 2-input EXCLUSIVE-OR gate	3.0 - 15	± 2.4	30	-40~85	•		
HEF4081B-Q100	Quad 2-input AND gate	3.0 - 15	± 2.4	20	-40~85	•		
HEF4082B-Q100	Dual 4-input AND gate	3.0 - 15	± 2.4	25	-40~85	•		

Latches/Registered drivers

Type number	Description	Features				Package (suffix)					
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)
74AHC573-Q100	Octal D-type transparent latch (3-state)	2.0 - 5.5	± 8	4.2	-40~125				•	•	•
74AHCT573-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.9	-40~125				•	•	•
74HC259-Q100	8 bit addressable latch	2.0 - 6.0	± 5.2	18	-40~125	•	•	•			
74HCT259-Q100	8 bit addressable latch; TTL-enabled	4.5 - 5.5	± 4	20	-40~125	•	•	•			
74HC373-Q100	Octal D-type transparent latch (3-state)	2.0 - 6.0	± 7.8	12	-40~125				•	•	•
74HCT373-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 6	14	-40~125				•	•	•
74HC573-Q100	Octal D-type transparent latch (3-state)	2.0 - 6.0	± 7.8	14	-40~125				•	•	•
74HCT573-Q100	Octal D-type transparent latch; TTL-enabled (3-state)	4.5 - 5.5	± 6	17	-40~125				•	•	•
74LVC373A-Q100	Octal D-type transparent latch (3-state)	1.2 - 3.6	± 24	3.0	-40~125				•	•	•
74LVC16373A-Q100	16-bit D-type transparent latch (3-state)	1.2 - 3.6	± 24	2.4	-40~125						•
74LVCH16373A-Q100	16-bit D-type transparent latch with bushold (3-state)	1.2 - 3.6	± 24	2.4	-40~125						•
HEF4043B-Q100	Quad R/S latch with set and reset (3-state)	3.0 - 15	± 2.4	25	-40~85	•					

Level shifters/Translators

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)								
		V _{cc(A)} (V)	V _{cc(B)} (V)	I _o (mA)	T _{amb} (°C)	SOT402-1 (PW)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT137-1 (D)	SOT355-1 (PW)	SOT815-1 (BQ)	SOT362-1 (DGG)	SOT480-1 (DGV)
74ALVC164245-Q100	16-bit dual-supply voltage level translating transceiver (3-state)	1.5 - 3.6	1.5 - 5.5	± 24	-40~125								•	
74AVC4T245-Q100	4-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•	•	•					
74AVC8T245-Q100	8-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125						•	•		
74AVC16T245-Q100	16-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125									•
74AVC20T245-Q100	20-bit dual-supply voltage-translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125									•
74AVCH4T245-Q100	4-bit dual-supply voltage translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•	•	•					
74HC4050-Q100	Hex buffer with 15V tolerant inputs	2.0 - 6.0	n.a	± 5.2	-40~125		•	•						
74LVC4T3144-Q100	4-bit dual supply buffer/line driver (3-state)	1.2 to 5.5	1.2 to 5.5	± 24	-40~125	•								
74LVC4245A-Q100	8-bit dual-supply voltage translating transceiver (3-state)	1.5 - 5.5	1.5 - 3.6	± 24	-40~125				•	•	•			
74LVC8T245-Q100	8-bit dual-supply voltage translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	•				
74LVCH8T245-Q100	8-bit dual-supply voltage translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	•				
HEF4104B-Q100	Quad low-to-high voltage translator (3-state)	3.0 - 15.0	3.0 - 15.0	± 2.4	-40~85		•							

Multivibrators

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)		
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)
74AHC123A-Q100	Dual retriggerable monostable multivibrator with reset	2.0 - 5.5	± 8	5.1	-40~125	•	•	•
74AHCT123A-Q100	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	± 8	5.0	-40~125	•	•	•
74HC123-Q100	Dual retriggerable monostable multivibrator with reset	2.0 - 6.0	± 7.8	9.0	-40~125	•	•	•
74HCT123-Q100	Dual retriggerable monostable multivibrator with reset; TTL-enabled	4.5 - 5.5	± 4	26	-40~125	•	•	•
74HC4538-Q100	Dual retriggerable precision monostable multivibrator	2.0 - 6.0	± 5.2	27	-40~125	•	•	
74HCT4538-Q100	Dual retriggerable precision monostable multivibrator; TTL-enabled	4.5 - 5.5	± 4	30	-40~125	•	•	
HEF4528B-Q100	Dual retriggerable monostable multivibrator with reset	3.0 - 15	± 2.4	40	-40~85	•		
HEF4538B-Q100	Dual retriggerable precision monostable multivibrator	3.0 - 15	± 2.4	60	-40~85	•		

Schmitt-triggers

Type number	Description	Features				Package (suffix)				
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT163-1 (D)	SOT360-1 (PW)
74AHC14-Q100	Hex inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125	•	•	•		
74AHCT14-Q100	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.0	-40~125	•	•	•		
74AHC132-Q100	Quad 2-input NAND gate Schmitt-trigger	2.0 - 5.5	± 8	3.3	-40~125	•	•	•		
74AHCT132-Q100	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•	•		
74HC7014-Q100	Hex buffer precision Schmitt-trigger	2.0 - 6.0	± 5.2	27	-40~125	•				
74HC14-Q100	Hex inverter Schmitt-trigger	2.0 - 6.0	± 5.2	12	-40~125	•	•	•		
74HCT14-Q100	Hex inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125	•	•	•		
74HC132-Q100	Quad 2-input NAND gate Schmitt-trigger	2.0 - 6.0	± 5.2	11	-40~125	•	•			
74HCT132-Q100	Quad 2-input NAND gate Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4	17	-40~125	•	•			
74HC7541-Q100	Octal buffer/line driver Schmitt-trigger (3-State)	2.0 - 6.0	± 7.8	11	-40~125				•	•
74HCT7541-Q100	Octal buffer/line driver Schmitt-trigger; TTL-enabled (3-State)	4.5 - 5.5	± 6	16	-40~125				•	•
74LV132-Q100	Quad 2-input NAND gate Schmitt-trigger	1.0 - 5.5	± 12	10	-40~125	•	•	•		
74LVC14A-Q100	Hex inverter Schmitt-trigger	1.2 - 3.6	± 24	3.2	-40~125	•	•	•		
74LVC132A-Q100	Quad 2-input NAND gate Schmitt-trigger	1.2 - 3.6	± 24	3.4	-40~125	•	•	•		
HEF40106B-Q100	Hex inverter Schmitt-trigger	4.5 - 15.5	± 2.4	30	-40~85	•	•			

Shift registers

Type number	Description	Features				Package (suffix)						
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)
74AHC164-Q100	8-bit serial-in/parallel-out shift register	2.0 - 5.5	± 8	4.5	-40~125	•	•	•				
74AHCT164-Q100	8-bit serial-in/parallel-out shift register; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•	•				
74AHC594-Q100	8-bit serial-in/parallel-out shift register with output register	2.0 - 5.5	± 8	4.1	-40~125				•	•	•	
74AHCT594-Q100	8-bit serial-in/parallel-out shift register with output register; TTL-enabled	4.5 - 5.5	± 8	3.8	-40~125				•	•	•	
74AHC595-Q100	8-bit serial-in/parallel-out shift register with output register (3-state)	2.0 - 5.5	± 8	4.0	-40~125				•	•	•	
74AHCT595-Q100	8-bit serial-in/parallel-out shift register with output storage; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.8	-40~125				•	•	•	
74HC164-Q100	8-bit serial-in/parallel-out shift register	2.0 - 6.0	± 5.2	12	-40~125	•	•	•				
74HCT164-Q100	8-bit serial-in/parallel-out shift register; TTL-enabled	4.5 - 5.5	± 4	12	-40~125	•	•	•				
74HC165-Q100	8-bit parallel or serial-in/serial-out shift register	2.0 - 6.0	± 5.2	16	-40~125				•	•	•	
74HCT165-Q100	8-bit parallel or serial-in/serial-out shift register; TTL-enabled	4.5 - 5.5	± 4	14	-40~125				•	•	•	
74HC166-Q100	8-bit parallel or serial-in/serial-out shift register	2.0 - 6.0	± 5.2	15	-40~125				•	•		
74HCT166-Q100	8-bit parallel or serial-in/serial-out shift register; TTL-enabled	4.5 - 5.5	± 4	23	-40~125				•			
74HC594-Q100	8-bit serial-in/parallel-out shift register with output storage register	2.0 - 6.0	± 7.8	14	-40~125				•	•		
74HCT594-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled	4.5 - 5.5	± 6	15	-40~125				•			
74HC595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	2.0 - 6.0	± 7.8	16	-40~125				•	•	•	
74HCT595-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled (3-state)	4.5 - 5.5	± 6	25	-40~125				•	•	•	
74HC597-Q100	8-bit parallel or serial-in/parallel-out shift register with parallel input register	2.0 - 6.0	± 5.2	16	-40~125				•	•		
74HCT597-Q100	8-bit parallel or serial-in/parallel-out shift register with parallel input register; TTL-enabled	4.5 - 5.5	± 4	20	-40~125				•			
74HC4094-Q100	8-bit serial-in/serial or parallel-out shift register with output register (3-state)	2.0 - 6.0	± 5.2	15	-40~125				•	•		
74HCT4094-Q100	8-bit serial-in/serial or parallel-out shift register with output register; TTL-enabled (3-state)	4.5 - 5.5	± 4	19	-40~125				•			
74LV164-Q100	8-bit serial-in/parallel-out shift register	1.0 - 5.5	± 12	12	-40~125	•	•	•				
74LV165-Q100	8-bit parallel or serial-in/serial-out shift register	1.0 - 5.5	± 12	18	-40~125				•	•		
74LV165A-Q100	8-bit parallel or serial-in/serial-out shift register	1.0 - 5.5	± 12	7.5	-40~125				•	•		

Shift registers

Type number	Description	Features				Package (suffix)						
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT108-1 (D)	SOT402-1 (PW)	SOT762-1 (BQ)	SOT109-1 (D)	SOT403-1 (PW)	SOT763-1 (BQ)	SOT163-1 (D)
74LV4060-Q100	14-stage binary ripple counter with oscillator	1.0 - 5.5	± 6	29	-40~125				•	•		
74LVC594A-Q100	8-bit serial-in/parallel-out shift register with output storage register	1.2 - 5.5	± 24	3.1	-40~125				•	•	•	
74VHC595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	2.0 - 5.5	± 8	4.0	-40~125				•	•	•	
74VHCT595-Q100	8-bit serial-in/parallel-out shift register with output storage register; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.8	-40~125				•	•	•	
HEF4014B-Q100	8-bit shift register with synchronous parallel enable	3.0 - 15	± 2.4	40	-40~85				•			
HEF4021B-Q100	8-bit shift register with asynchronous parallel load	3.0 - 15	± 2.4	40	-40~85				•	•		
HEF4094B-Q100	8-bit serial-in/serial or parallel-out shift register with output register (3-state)	3.0 - 15	± 2.4	50	-40~85				•	•		
HEF4794B-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.0 - 15	-20	45	-40~85				•			
HEF4894B-Q100	12-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.0 - 15	-20	45	-40~85						•	•
NPIC6C595-Q100	8-bit serial-in/parallel-out shift register with output storage register (3-state)	4.5 - 5.5	-100	90	-40~125				•	•	•	
NPIC6C596-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	4.5 - 5.5	-100	90	-40~125				•	•	•	
NPIC6C596A-Q100	8-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	2.3 - 5.5	-100	90	-40~125				•	•	•	
NPIC6C4894-Q100	12-bit serial-in/serial or parallel-out shift register with output register LED driver (3-state)	3.5 - 15	-100	105	-40~125						•	•

Transceivers

Type number	Description	Features				Package (suffix)			
		V_{cc} (V)	I_o (mA)	t_{pd} (ns)	T_{amb} (°C)	SOT163-1 (D)	SOT360-1 (PW)	SOT764-1 (BQ)	SOT362-1 (DGG)
74AHC245-Q100	Octal transceiver (3-state)	2.0 - 5.5	± 8	3.5	-40~125	•	•	•	
74AHCT245-Q100	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	± 8	5.0	-40~125	•	•	•	
74AVC16245-Q100	16-bit transceiver (3-state)	1.2 - 3.6	± 12	2.0	-40~85				•
74HC245-Q100	Octal transceiver (3-state)	2.0 - 6.0	± 7.8	7.0	-40~125	•	•	•	
74HCT245-Q100	Octal transceiver; TTL-enabled (3-state)	4.5 - 5.5	± 6	10	-40~125	•	•	•	
74LVC245A-Q100	Octal transceiver (3-state)	1.2 - 3.6	± 24	2.9	-40~125	•	•	•	
74LVCH245A-Q100	Octal transceiver with bus hold (3-state)	1.2 - 3.6	± 24	2.9	-40~125	•	•	•	
74LVC162245A-Q100	16-bit transceiver with 30 Ω termination resistors (3-state)	1.2 - 3.6	± 12	3.3	-40~125				•

Automotive mini logic

Analog switches

Type number	Description	Configuration	Features					Package (suffix)			
			V _{CC} (V)	R _{ON} (Ω)	R _{ON(FLAT)} (Ω)	T _{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)
74AHC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	2.0 - 5.5	40	5	-40~125	•	•			
74AHCT1G66-Q100	Single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	40	5	-40~125	•	•			
74HC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	2.0 - 9.0	105	23	-40~125	•	•			
74HCT1G66-Q100	Single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125	•	•			
74HC2G66-Q100	Dual single-pole, single-throw analog switch	SPST-NO	2.0 - 9.0	105	23	-40~125					•
74HCT2G66-Q100	Dual single-pole, single-throw analog switch; TTL-enabled	SPST-NO	4.5 - 5.5	118	23	-40~125					•
74LVC1G53-Q100	Single-pole, double-throw analog switch	SPDT-Z	1.65 - 5.5	15	1.5	-40~125					•
74LVC1G66-Q100	Single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125	•	•			
74LVC1G384-Q100	Single-pole, single-throw analog switch	SPST-NC	1.65 - 5.5	15	1.5	-40~125	•	•			
74LVC1G3157-Q100	Single-pole, double-throw analog switch	SPDT	1.65 - 5.5	15	1.5	-40~125			•	•	
74LVC2G66-Q100	Dual single-pole, single-throw analog switch	SPST-NO	1.65 - 5.5	15	1.5	-40~125					•

Bus switches

Type number	Description	Features					Package (suffix)	
		V _{CC} (V)	V _{PASS} (V)	R _{ON} (Ω)	T _{amb} (°C)	SOT96-1 (D)	SOT530-1 (PW)	
CBT3306-Q100	Dual bus switch	4.5 - 5.5	3.9	7	-40~85	•	•	

Buffers/Inverters

Type number	Description	Features				Package (suffix)					
		V _{CC} (V)	I _O (mA)	t _{PD} (ns)	T _{AMB} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1GU04-Q100	Single inverter; unbuffered	2.0 - 5.5	± 8	2.6	-40~125	•	•				
74AHC3GU04-Q100	Triple inverter; unbuffered	2.0 - 5.5	± 8	2.5	-40~125					•	•
74AHC1G04-Q100	Single inverter	2.0 - 5.5	± 8	3.1	-40~125	•	•				
74AHCT1G04-Q100	Single inverter; TTL-enabled	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC1G07-Q100	Single buffer; open-drain	2.0 - 5.5	8	4.2	-40~125	•	•				
74AHC1G17-Q100	Single buffer with Schmitt-trigger inputs	2.0 - 5.5	± 8	3.2	-40~125	•					
74AHCT1G17-Q100	Single buffer with Schmitt-trigger inputs; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125	•					
74AHC1G125-Q100	Single buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G125-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC1G126-Q100	Single buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G126-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125	•	•				
74AHC2G125-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G125-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125					•	•
74AHC2G126-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G126-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125						•
74AHC2G241-Q100	Dual buffer/line driver (3-state)	2.0 - 5.5	± 8	3.4	-40~125					•	•
74AHCT2G241-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 8	3.4	-40~125						•
74AHC3G04-Q100	Triple inverter	2.0 - 5.5	± 8	3.1	-40~125					•	•
74AHCT3G04-Q100	Triple inverter; TTL-enabled	4.5 - 5.5	± 8	3.0	-40~125						•
74AUP1G04-Q100	Single inverter	1.1 - 3.6	± 1.9	4.0	-40~125	•	•				
74AUP1G06-Q100	Single inverter; open-drain	1.1 - 3.6	1.9	4.5	-40~125	•					
74AUP1G34-Q100	Single buffer	1.1 - 3.6	± 1.9	3.9	-40~125	•					
74AUP1G125-Q100	Single buffer/line driver (3-state)	1.1 - 3.6	± 1.9	4.3	-40~125	•					
74AUP2G04-Q100	Dual inverter	1.1 - 3.6	± 1.9	4.0	-40~125					•	
74AUP2GU04-Q100	Dual inverter; unbuffered	1.1 - 3.6	± 1.9	2.3	-40~125					•	
74HC1GU04-Q100	Single inverter; unbuffered	2.0 - 6.0	± 2.6	5.0	-40~125	•	•				
74HC2GU04-Q100	Dual inverter; unbuffered	2.0 - 6.0	± 5.2	5.0	-40~125			•	•		
74HC3GU04-Q100	Triple inverter; unbuffered	2.0 - 6.0	± 5.2	6.0	-40~125					•	•
74HC1G04-Q100	Single inverter	2.0 - 6.0	± 2.6	7.0	-40~125	•	•				
74HCT1G04-Q100	Single inverter; TTL-enabled	4.5 - 5.5	± 2.0	8.0	-40~125	•	•				
74HC1G125-Q100	Single buffer/line driver (3-state)	2.0 - 6.0	± 2.6	9.0	-40~125	•	•				
74HCT1G125-Q100	Single buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 2.0	10	-40~125	•	•				

Buffers/Inverters

Type number	Description	Features				Package (suffix)					
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{imb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74HC2G04-Q100	Dual inverter	2.0 - 6.0	± 5.2	8.0	-40~125			•	•		
74HCT2G04-Q100	Dual inverter; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125			•	•		
74HC2G34-Q100	Dual buffer	2.0 - 6.0	± 5.2	9.0	-40~125			•	•		
74HCT2G34-Q100	Dual buffer; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125			•	•		
74HC2G125-Q100	Dual buffer/line driver (3-state)	2.0 - 6.0	± 5.2	10	-40~125				•	•	
74HCT2G125-Q100	Dual buffer/line driver; TTL-enabled (3-state)	4.5 - 5.5	± 4.0	12	-40~125				•	•	
74HC3G04-Q100	Triple inverter	2.0 - 6.0	± 5.2	8.0	-40~125				•	•	
74HCT3G04-Q100	Triple inverter; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125				•	•	
74HC3G07-Q100	Triple buffer; open-drain	2.0 - 6.0	5.2	9.0	-40~125				•	•	
74HCT3G07-Q100	Triple buffer; open-drain; TTL-enabled	4.5 - 5.5	4	9.0	-40~125				•	•	
74HC3G34-Q100	Triple buffer	2.0 - 6.0	± 5.2	9.0	-40~125				•	•	
74HCT3G34-Q100	Triple buffer; TTL-enabled	4.5 - 5.5	± 4.0	10	-40~125					•	
74LVC1G04-Q100	Single inverter	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1G06-Q100	Single inverter; open-drain	1.65 - 5.5	32	2.3	-40~125	•	•				
74LVC1G07-Q100	Single buffer; open-drain	1.65 - 5.5	32	2.2	-40~125	•	•				
74LVC1G34-Q100	Single buffer	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1G125-Q100	Single buffer/line driver (3-state)	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G126-Q100	Single buffer/line driver (3-state)	1.65 - 5.5	± 32	2.0	-40~125	•	•				
74LVC1GU04-Q100	Single inverter; unbuffered	1.65 - 5.5	± 32	1.6	-40~125	•	•				
74LVC2G04-Q100	Dual inverter	1.65 - 5.5	± 32	2.7	-40~125			•	•		•
74LVC2G06-Q100	Dual inverter; open-drain	1.65 - 5.5	32	2.3	-40~125			•	•		
74LVC2G07-Q100	Dual buffer; open-drain	1.65 - 5.5	32	2.6	-40~125			•	•		
74LVC2G125-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.3	-40~125				•	•	
74LVC2G126-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.4	-40~125				•	•	
74LVC2G240-Q100	Dual inverter/line driver (3-state)	1.65 - 5.5	± 32	2.5	-40~125				•	•	
74LVC2G241-Q100	Dual buffer/line driver (3-state)	1.65 - 5.5	± 32	2.6	-40~125				•	•	
74LVC2GU04-Q100	Dual inverter; unbuffered	1.65 - 5.5	± 32	2.3	-40~125			•	•		
74LVC3G04-Q100	Triple inverter	1.65 - 5.5	± 32	2.7	-40~125				•	•	
74LVC3G07-Q100	Triple buffer; open-drain	1.65 - 5.5	32	2.1	-40~125				•	•	
74LVC3G34-Q100	Triple buffer	1.65 - 5.5	± 32	2.2	-40~125				•	•	

Logic

Digital decoders/Demultiplexers

Types in **bold** represent new products

Type number	Description	Features				Package (suffix)	
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT363 (GW)	SOT457 (GV)
74LVC1G18-Q100	1-to-2 demultiplexer (3-state)	1.65 - 5.5	± 32	2.3	-40~125	•	•
74LVC1G19-Q100	1-to-2 demultiplexer	1.65 - 5.5	± 32	1.8	-40~125	•	

Digital multiplexers

Type number	Description	Features				Package (suffix)	
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT363 (GW)	SOT457 (GV)
74LVC1G157-Q100	Single 2-input multiplexer	1.65 - 5.5	± 32	2.2	-40~125	•	•

Flip-flops

Type number	Description	Features				Package (suffix)					
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G79-Q100	Single D-type flip-flop; positive-edge trigger	2.0 - 5.5	± 8	3.5	-40~125	•	•				
74AHCT1G79-Q100	Single D-type flip-flop; positive-edge trigger; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AUP1G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.1 - 3.6	± 1.9	8.1	-40~125						•
74AUP1G175-Q100	Single D flip-flop with reset; positive-edge trigger	1.1 - 3.6	± 1.9	7.4	-40~125				•		
74AUP1G374-Q100	Single D-type flip-flop; positive-edge trigger (3-state)	1.1 - 3.6	± 1.9	7.9	-40~125			•			
74AUP2G79-Q100	Dual D-type flip-flop; positive-edge trigger	1.1 - 3.6	± 1.9	8.5	-40~125					•	
74LVC1G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	± 32	3.5	-40~125				•	•	
74LVC1G79-Q100	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	± 32	2.2	-40~125	•	•				
74LVC1G80-Q100	Single D-type flip-flop; positive-edge trigger	1.65 - 5.5	± 32	2.4	-40~125	•	•				
74LVC1G175-Q100	Single D flip-flop with reset; positive-edge trigger	1.65 - 5.5	± 32	3.1	-40~125			•	•		
74LVC2G74-Q100	Single D-type flip-flop with set and reset; positive-edge trigger	1.65 - 5.5	± 32	3.5	-40~125				•	•	

Gates

Type number	Description	Features				Package (suffix)					
		V _{CC} (V)	I _O (mA)	t _{PD} (ns)	T _{AMB} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G09-Q100	Single 2-input AND gate; open-drain	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHC1G00-Q100	Single 2-input NAND gate	2.0 - 5.5	± 8	3.5	-40~125	•	•				
74AHCT1G00-Q100	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•				
74AHC1G02-Q100	Single 2-input NOR gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G02-Q100	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AHC1G08-Q100	Single 2-input AND gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G08-Q100	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125	•	•				
74AHC1G32-Q100	Single 2-input OR gate	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G32-Q100	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125	•	•				
74AHC1G86-Q100	2-input EXCLUSIVE-OR gate	2.0 - 5.5	± 8	3.4	-40~125	•	•				
74AHCT1G86-Q100	2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 8	3.5	-40~125	•	•				
74AHC2G00-Q100	Dual 2-input NAND gate	2.0 - 5.5	± 8	3.5	-40~125				•	•	
74AHCT2G00-Q100	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125						•
74AHC2G08-Q100	Dual 2-input AND gate	2.0 - 5.5	± 8	3.2	-40~125				•	•	
74AHCT2G08-Q100	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	± 8	3.6	-40~125				•	•	
74AHC2G32-Q100	Dual 2-input OR gate	2.0 - 5.5	± 8	3.2	-40~125				•	•	
74AHCT2G32-Q100	Dual 2-input OR gate; TTL-enabled	4.5 - 5.5	± 8	3.3	-40~125				•	•	
74AUP1G02-Q100	Single 2-input NOR gate	1.1 - 3.6	± 1.9	8.2	-40~125	•					
74AUP1G08-Q100	Single 2-input AND gate	1.1 - 3.6	± 1.9	8.2	-40~125	•					
74AUP1G32-Q100	Single 2-input OR gate	1.1 - 3.6	± 1.9	7.9	-40~125	•					
74AUP1G86-Q100	Single 2-input EXCLUSIVE-OR gate	1.1 - 3.6	± 1.9	3.3	-40~125	•					
74AUP1T98-Q100	Configurable gate with voltage level translation	2.3-3.6 V	± 1.9	8.7	-40~125			•			
74HC1G86-Q100	Single 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 2.6	9.0	-40~125	•	•				
74HC1G00-Q100	Single 2-input NAND gate	2.0 - 6.0	± 2.6	7.0	-40~125	•					
74HCT1G00-Q100	Single 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 2	10	-40~125	•	•				
74HC1G02-Q100	Single 2-input NOR gate	2.0 - 6.0	± 2.6	7.0	-40~125	•	•				
74HCT1G02-Q100	Single 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 2.0	9.0	-40~125	•	•				
74HC1G08-Q100	Single 2-input AND gate	2.0 - 6.0	± 5.2	7.0	-40~125	•	•				
74HCT1G08-Q100	Single 2-input AND gate; TTL-enabled	4.5 - 5.5	± 2	11	-40~125	•	•				
74HC1G32-Q100	Single 2-input OR gate	2.0 - 6.0	± 2.6	8.0	-40~125	•	•				
74HCT1G32-Q100	Single 2-input OR gate; TTL-enabled	4.5 - 5.5	± 2.0	10	-40~125	•	•				
74HC2G00-Q100	Dual 2-input NAND gate	2.0 - 6.0	± 5.6	9.0	-40~125				•	•	
74HCT2G00-Q100	Dual 2-input NAND gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125				•	•	
74HC2G02-Q100	Dual 2-input NOR gate	2.0 - 6.0	± 5.2	9.0	-40~125				•	•	
74HCT2G02-Q100	Dual 2-input NOR gate; TTL-enabled	4.5 - 5.5	± 4	12	-40~125				•	•	
74HC2G08-Q100	ual 2-input AND gate	2.0 - 6.0	± 5.2	9.0	-40~125				•	•	

Logic

Gates

Type number	Description	Features				Package (suffix)					
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74HCT2G08-Q100	Dual 2-Input AND gate; TTL-enabled	4.5 - 5.5	± 4	14	-40~125					•	•
74HC2G32-Q100	Dual 2-input OR gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT2G32-Q100	Dual 2-input OR gate; TTL-enabled	4.5 - 5.5	± 4.0	13	-40~125					•	•
74HC2G86-Q100	Dual 2-input EXCLUSIVE-OR gate	2.0 - 6.0	± 5.2	9.0	-40~125					•	•
74HCT2G86-Q100	Dual 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 4.0	11	-40~125						•
74HCT1G86-Q100	Single 2-input EXCLUSIVE-OR gate; TTL-enabled	4.5 - 5.5	± 2.0	10	-40~125	•	•				
74LVC1G00-Q100	Single 2-input NAND gate	1.65 - 5.5	± 32	2.2	-40~125	•	•				
74LVC1G02-Q100	Single 2-input NOR gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G08-Q100	Single 2-input AND gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G10-Q100	Single 3-input NAND gate	1.65 - 5.5	± 32	2.6	-40~125					•	
74LVC1G11-Q100	Single 3-input AND gate	1.65 - 5.5	± 32	2.6	-40~125			•	•		
74LVC1G32-Q100	Single 2-input OR gate	1.65 - 5.5	± 32	2.1	-40~125	•	•				
74LVC1G38-Q100	Single 2-input NAND gate; open-drain	1.65 - 5.5	32	2.3	-40~125	•	•				
74LVC1G57-Q100	Configurable gate; Schmitt-trigger	1.65 - 5.5	± 32	3.8	-40~125			•	•		
74LVC1G58-Q100	Configurable gate; Schmitt-trigger	1.65 - 5.5	± 32	3.8	-40~125			•	•		
74LVC1G86-Q100	Single 2-input EXCLUSIVE-OR gate	1.65 - 5.5	± 32	2.4	-40~125	•	•				
74LVC1G332-Q100	Single 3-input OR gate	1.65 - 5.5	± 32	2.6	-40~125			•	•		
74LVC1GX04-Q100	Crystal driver	1.65 - 5.5	± 24	2.8	-40~125			•	•		
74LVC2G00-Q100	Dual 2-input NAND gate	1.65 - 5.5	± 32	2.2	-40~125						•
74LVC2G02-Q100	Dual 2-input NOR gate	1.65 - 5.5	± 32	2.4	-40~125					•	•
74LVC2G08-Q100	Dual 2-input AND gate	1.65 - 5.5	± 24	2.1	-40~125					•	•
74LVC2G32-Q100	Dual 2-input OR gate	1.65 - 5.5	± 32	2.2	-40~125					•	•
74LVC2G34-Q100	Dual buffer	1.65 - 5.5	± 32	2.2	-40~125			•	•		
74LVC2G86-Q100	Dual 2-input EXCLUSIVE-OR gate	1.65 - 5.5	± 32	2.3	-40~125					•	•

Latches/Registered drivers

Type number	Description	Features				Package (suffix)	
		V _{CC} (V)	I _O (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT363 (GW)	
74AUP1G373-Q100	Single D-type transparent latch (3-state)	1.1 - 3.6	±1.9	8.5	-40~125		•

Multivibrators


Type number	Description	Features				Package (suffix)	
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT505-2 (DP)	SOT765-1 (DC)
74LVC1G123-Q100	Single retriggerable monostable multivibrator	1.65 - 5.5	± 32	3.5	-40~125	•	•

Schmitt-triggers

Type number	Description	Features				Package (suffix)					
		V _{cc} (V)	I _o (mA)	t _{pd} (ns)	T _{amb} (°C)	SOT353-1 (GW)	SOT753 (GV)	SOT363 (GW)	SOT457 (GV)	SOT505-2 (DP)	SOT765-1 (DC)
74AHC1G14-Q100	Single inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125	•	•				
74AHCT1G14-Q100	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125	•	•				
74AHC3G14-Q100	Triple inverter Schmitt-trigger	2.0 - 5.5	± 8	3.2	-40~125					•	•
74AHCT3G14-Q100	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 8	4.1	-40~125					•	•
74HC1G14-Q100	Single inverter Schmitt-trigger	2.0 - 6.0	± 2.6	10	-40~125	•	•				
74HCT1G14-Q100	Single inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 2.0	15	-40~125	•	•				
74HC2G14-Q100	Dual inverter Schmitt-trigger	2.0 - 6.0	± 5.2	16	-40~125			•	•		
74HCT2G14-Q100	Dual inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125			•	•		
74HC2G17-Q100	Dual buffer Schmitt-trigger	2.0 - 6.0	± 5.2	12	-40~125			•	•		
74HCT2G17-Q100	Dual buffer Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125			•	•		
74HC3G14-Q100	Triple inverter Schmitt-trigger	2.0 - 6.0	± 5.2	16	-40~125					•	•
74HCT3G14-Q100	Triple inverter Schmitt-trigger; TTL-enabled	4.5 - 5.5	± 4.0	21	-40~125					•	•
74LVC1G14-Q100	Single inverter Schmitt-trigger	1.65 - 5.5	± 32	3.0	-40~125	•	•				
74LVC1G17-Q100	Single buffer Schmitt-trigger	1.65 - 5.5	± 32	3.0	-40~125	•	•				
74LVC2G14-Q100	Dual inverter Schmitt-trigger	1.65 - 5.5	± 32	3.9	-40~125			•	•		
74LVC2G17-Q100	Dual buffer Schmitt-trigger	1.65 - 5.5	± 32	3.6	-40~125			•	•		
74LVC3G17-Q100	Triple buffer Schmitt-trigger	1.65 - 5.5	± 32	3.6	-40~125					•	•

Level shifters/Translators

Type number	Description	Features				Package (suffix)				
		V _{cc(A)} (V)	V _{cc(B)} (V)	I _o (mA)	T _{amb} (°C)	SOT353-1 (GW)	SOT363 (GW)	SOT505-2 (DP)	SOT765-1 (DC)	SOT552-1 (DP)
74AUP1T34-Q100	Single dual supply translating buffer	1.1 - 3.6	1.1 - 3.6	± 1.9	-40~125	•				
74AVC1T45-Q100	Single dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•			
74AVC2T45-Q100	Dual-bit dual-supply voltage level translating transceiver (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125			•	•	
74AVCH1T45-Q100	Single dual-supply voltage translating transceiver with bus hold (3-state)	0.8 - 3.6	0.8 - 3.6	± 12	-40~125		•			
74AXP1T57-Q100	Dual-supply translating configurable multiple function gate, Schmitt-trigger inputs	0.7 - 2.75	1.2 - 5.5	± 12	-40~125				•	
74AXP2T08-Q100	Dual-supply 2-input AND gate	0.7 - 2.75	1.2 - 5.5	± 12	-40~125					•
74LVC1T45-Q100	Single dual-supply voltage level translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125		•			
74LVCH1T45-Q100	Single dual-supply voltage translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125		•			
74LVC2T45-Q100	Dual-bit dual-supply voltage level translating transceiver (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	
74LVCH2T45-Q100	Dual-bit dual-supply voltage level translating transceiver with bus hold (3-state)	1.2 - 5.5	1.2 - 5.5	± 24	-40~125				•	

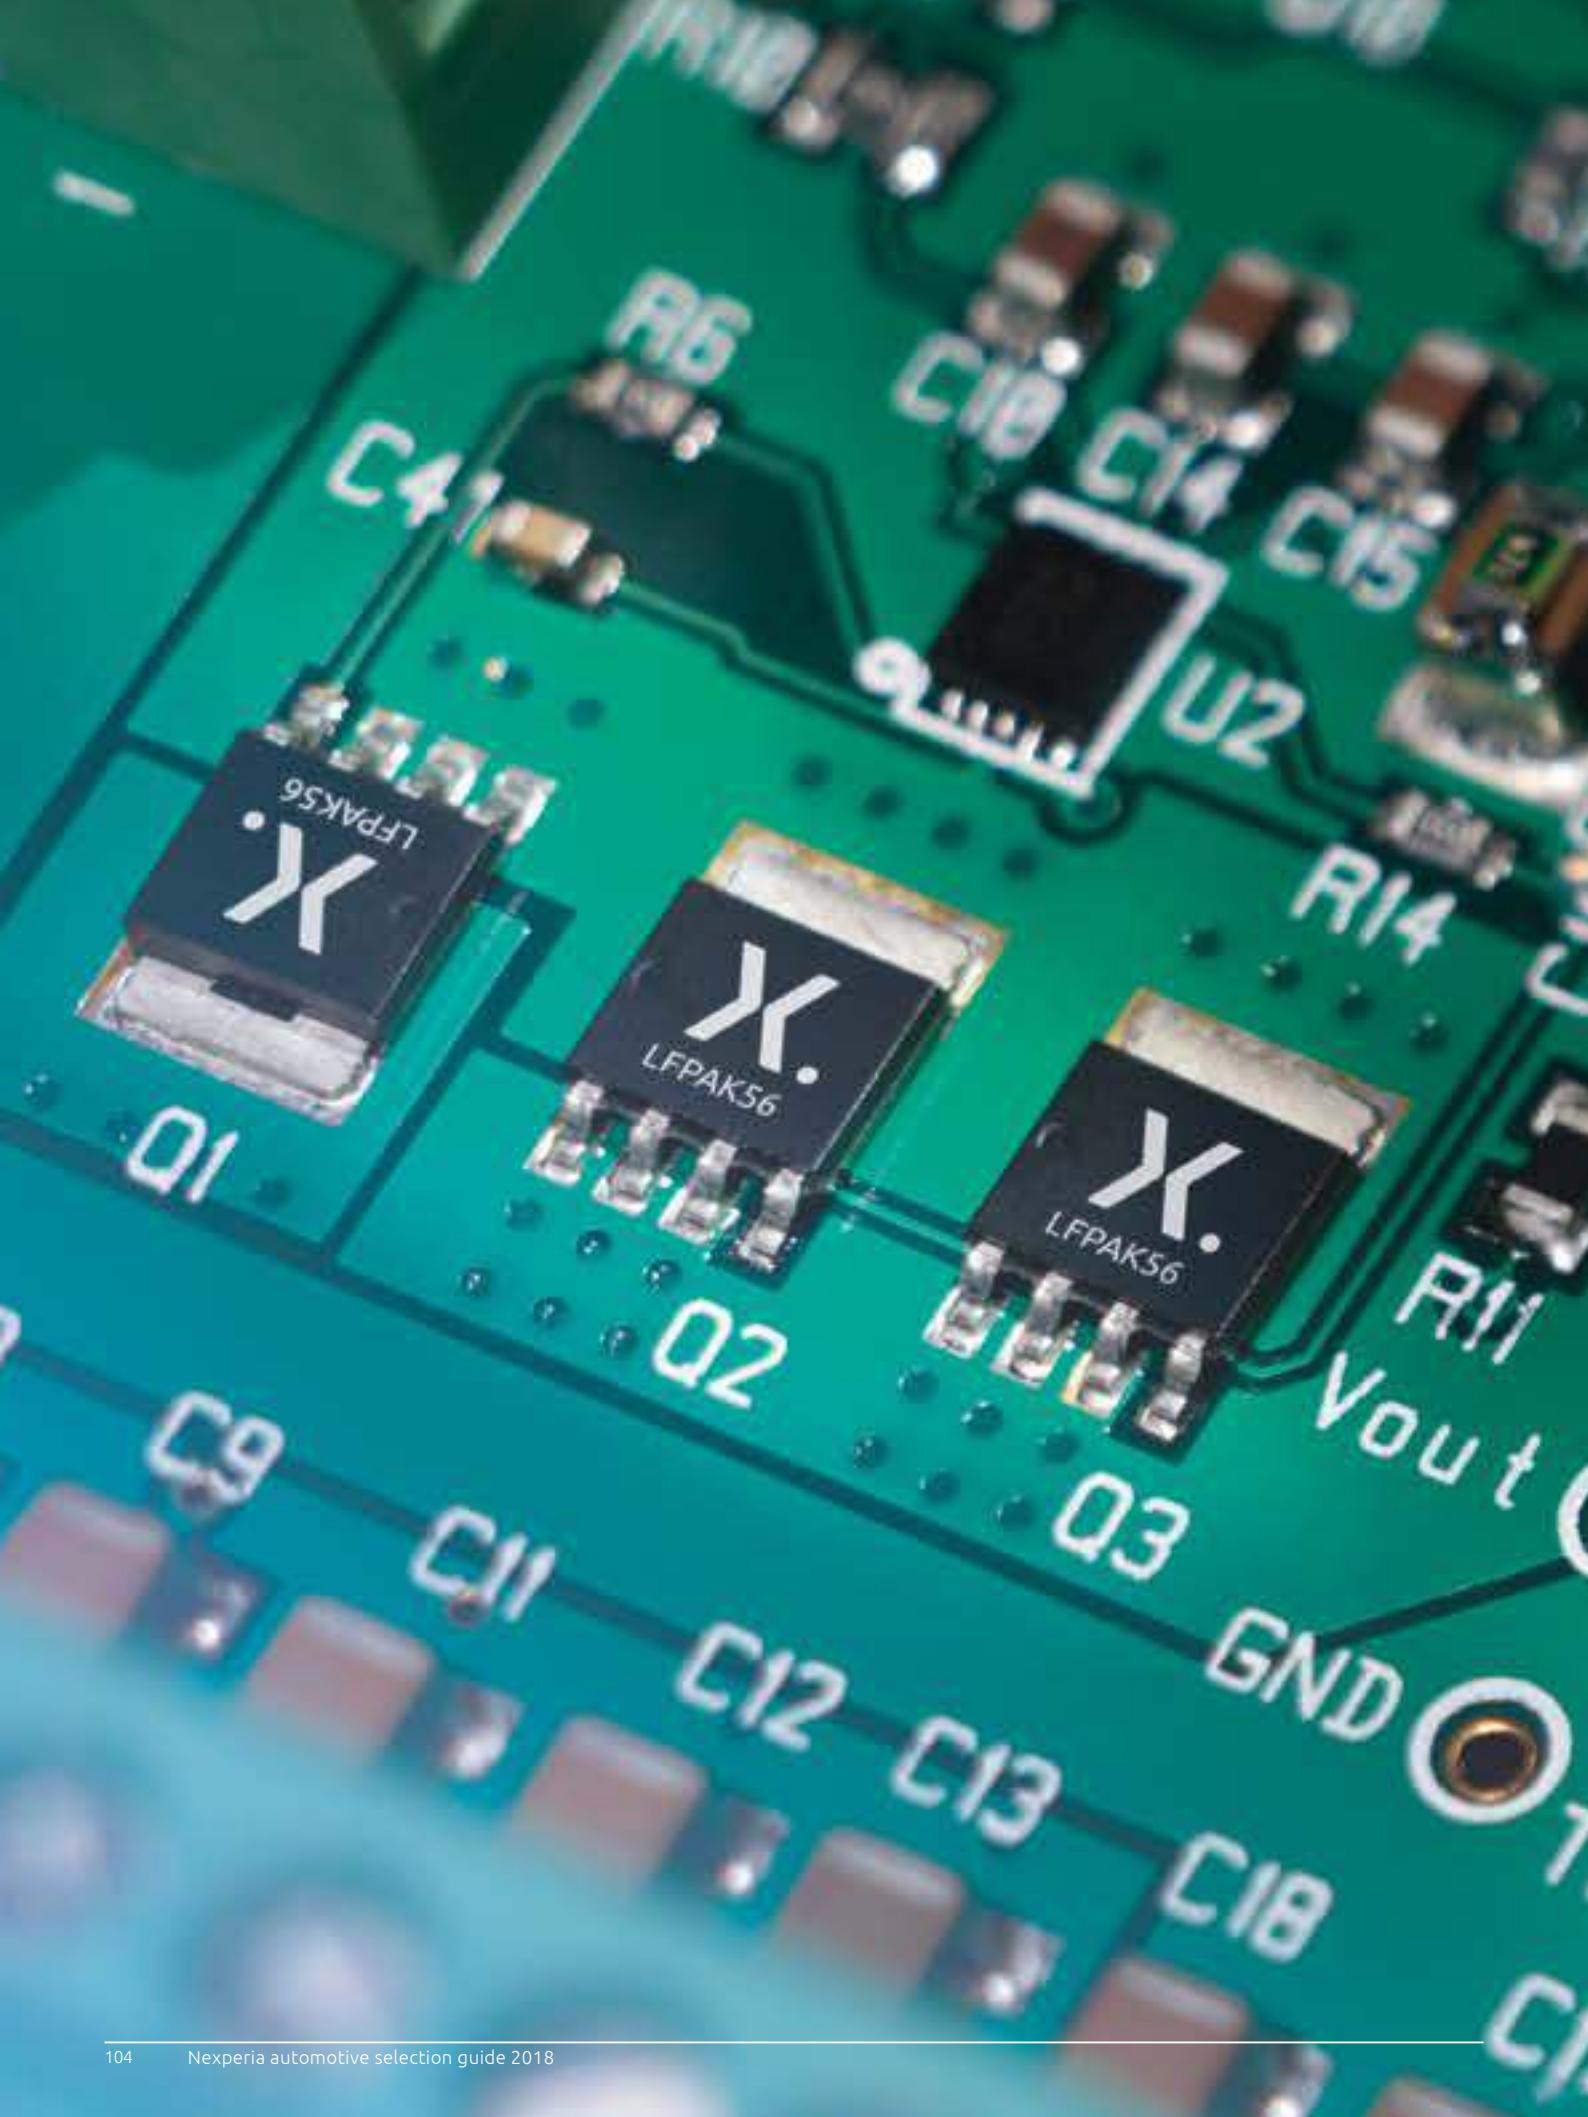

Packages

6

Package details and packing methods	106
Package details and packing methods SMD – Part 1.....	106
Package details and packing methods SMD – Part 2.....	107
Package details and packing methods SMD – Part 3.....	108
Packing details glass diodes, single ended and through hole packages.....	109
Package cross reference list – Part 1.....	110
Package cross reference	111
Package cross reference list – Part 2.....	111
Package cross reference list – Part 3.....	112
Package cross reference list – Part 4.....	113
Package cross reference list – Part 5.....	114
Package cross reference matrix – Part 1.....	114
Package cross reference matrix – Part 2.....	115
Competitive cross reference - Logic.....	116
Packing methods.....	117
Product orientation (tape and reel pack)	118
Minimized outline drawings and reflow soldering footprint	121
2-pin SMD packages.....	121
3-pin SMD packages.....	123
4-pin SMD packages.....	126
5-pin SMD packages.....	127
6-pin SMD packages.....	128
8-pin SMD packages.....	132
8-pin SMD packages.....	133
More than 8-pin SMD packages.....	134
Single-ended and through-hole packages	139

Package details and packing methods

Package details and packing methods SMD – Part 1

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
2	DFN1006D-2 (SOD882D)	1.00 x 0.60 x 0.37	0.65		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	DFN1006-2 (SOD882)	1.00 x 0.60 x 0.48	0.65		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	SOD523 (SC-79)	1.20 x 0.80 x 0.60			2 mm pitch. 8 mm tape and reel	180 x 8															-315	
					4 mm pitch. 8 mm tape and reel	180 x 8															-135	
					4 mm pitch. 8 mm tape and reel	286 x 8															-135	
	DFN1608D-2 (SOD 1608)	1.60 x 0.80 x 0.37	0.94		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	SOD323F (SC-90)	1.70 x 1.25 x 0.70			4 mm pitch. 8 mm tape and reel	180 x 8															-135	
						286 x 8																-135
	SOD323 (SC-76)	1.70 x 1.25 x 0.95			4 mm pitch. 8 mm tape and reel	180 x 8															-135	
						286 x 8																-135
						10 reels in one box																-135
3	SOD123F	2.60 x 1.60 x 1.10			4 mm pitch. 8 mm tape and reel	180 x 8															-115	
	CFP3 (SOD123W)	2.60 x 1.70 x 1.00			4 mm pitch. 8 mm tape and reel	180 x 8															-115	
	SOD123	2.70 x 1.60 x 1.20			4 mm pitch. 8 mm tape and reel	180 x 8															-118	
						286 x 8																-118
	SOD80C (MiniMelf)	3.50 x 1.50 x 1.50			4 mm pitch. 8 mm tape and reel	180 x 8															-135	
						330 x 8																-135
	CFP5 (SOD128)	3.80 x 2.50 x 1.00			4 mm pitch. 12 mm tape and reel	180 x 12															-115	
	DFN1006B-3 (SOT883B)	1.00 x 0.60 x 0.37	0.65		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	DFN1006-3 (SOT883)	1.00 x 0.60 x 0.48	0.65		2 mm pitch. 8 mm tape and reel	180 x 8															-315	
	DFN1010D-3 (SOT1215)	1.10 x 1.00 x 0.37	0.75		4 mm pitch. 8 mm tape and reel	180 x 8															-115	
4	SOT663	1.20 x 1.60 x 0.55	0.5		4 mm pitch. 8 mm tape and reel	180 x 8															-115	
	SOT323 (SC-70)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8															-115	
						286 x 8																-135
	DFN2020-3 (SOT1061)	2.00 x 2.00 x 0.62	1.3		4 mm pitch. 8 mm tape and reel	180 x 8															-115	
	DFN2020D-3 (SOT1061D)	2.00 x 2.00 x 0.62	1.3		4 mm pitch. 8 mm tape and reel	180 x 8															-115	
	SOT23	2.90 x 1.30 x 1.00	0.95		4 mm pitch. 8 mm tape and reel	180 x 8															-215	
						286 x 8																-235
						10 reels in one box																-185
	SOT89 (SC-62)	4.50 x 2.50 x 1.50	1.5		8 mm pitch. 12 mm tape and reel	180 x 12															-135	
					8 mm pitch. 12 mm tape and reel	330 x 12															-135	
					8 mm pitch. 12 mm tape and reel	180 x 12															-146	
					8 mm pitch. 12 mm tape and reel	180 x 12															-147	
5	CFP15 (SOT1289)	5.80 x 4.30 x 0.78	2.13		8 mm pitch. 12 mm tape and reel	330 x 12															-139	
	DPAK (SOT428)	6.60 x 6.10 x 2.30	4.57		8 mm pitch. 16 mm tape and reel	330 x 16															-118	
	D2PAK (SOT404)	10 x 9.60 x 4.30	5.08		16 mm pitch. 24 mm tape and reel	330 x 24		118														

Package details and packing methods SMD – Part 2

Package details					Packing methods														
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)												
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000
4	SOT143B	2.90 x 1.30 x 1.00	1.9		4 mm pitch. 8 mm tape and reel	180 x 8							-215						
	LFFPAK56 (SOT669)	4.90 x 4.45 x 1.00	1.27		4 mm pitch. 8 mm tape and reel	286 x 8													-235
	SOT223 (SC-73)	6.50 x 3.50 x 1.65	2.3		8 mm pitch. 12 mm tape and reel	180 x 12				-115									
					8 mm pitch. 12 mm tape and reel	180 x 12			-115										
5	SOT665	1.60 x 1.20 x 0.55	0.5		2 mm pitch. 8 mm tape and reel	180 x 8													-125
					4 mm pitch. 8 mm tape and reel	180 x 8							-115						
	SOT353 (SC-88 A)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8						-115							-135
					4 mm pitch. 8 mm tape and reel	286 x 8													
					4 mm pitch. 8 mm tape and reel	180 x 8						-125							
	TSOPS5 (SOT753)	2.90 x 1.50 x 1.00	0.95		4mm pitch, 8mm tape and reel	180 x 8						-125							
					4mm pitch, 8mm tape and reel	180 x 8													
6	XSON6 (SOT1202)	1.00 x 1.00 x 0.35	0.35		4mm pitch, 8mm tape and reel	180 x 8												-125	
	DFN1010-6 (SOT891)	1.00 x 1.00 x 0.50	0.35		4 mm pitch. 8 mm tape and reel	180 x 8												-125	
	DFN1010B-6 (SOT1216)	1.10 x 1.00 x 0.37	0.35		4 mm pitch. 8 mm tape and reel	180 x 8												-147	
	DFN1412-6 (SOT1268)	1.40 x 1.20 x 0.50	0.5		4 mm pitch. 8 mm tape and reel	180 x 8												-147	
	SOT666	1.60 x 1.20 x 0.55	0.5		2 mm pitch. 8 mm tape and reel	180 x 8													-315
					4 mm pitch. 8 mm tape and reel	180 x 8							-115						
	SOT363 (SC-88)	2.00 x 1.25 x 0.95	0.65		4 mm pitch. 8 mm tape and reel	180 x 8						-115							-135
					4 mm pitch. 8 mm tape and reel	286 x 8													
					4 mm pitch. 8 mm tape and reel	180 x 8						-125							
					4 mm pitch. 8 mm tape and reel	286 x 8													
	DFN2020-6 (SOT 1118)	2.00 x 2.00 x 0.62	0.65		4 mm pitch. 8 mm tape and reel	180 x 8						-115							
					4 mm pitch. 8 mm tape and reel	180 x 8						-184							
7	DFN2020D-6 (SOT1118D)	2.00 x 2.00 x 0.62	0.65		4 mm pitch. 8 mm tape and reel	180 x 8						-115							
	DF-N2020MD-6 (SOT1220)	2.00 x 2.00 x 0.62	0.65		4 mm pitch. 8 mm tape and reel	180 x 8						-115							
					4 mm pitch. 8 mm tape and reel	180 x 8						-125							
	SOT457 (SC-74)	2.90 x 1.50 x 1.00	0.95		4 mm pitch. 8 mm tape and reel	180 x 8						-115							-135
					4 mm pitch. 8 mm tape and reel	286 x 8													-165
7	DFN2111-7 (SOT1358)	2.10 x 1.10 x 0.50	1.3		4 mm pitch, 8 mm tape and reel	180 x 9						471							
	D2PAK-7 (SOT427)	10 x 15.30 x 4.30	-		16 mm pitch, 24 mm tape and reel	330 x 24		118											

Package details and packing methods

Package details and packing methods SMD – Part 3

Package details					Packing methods																	
Pins/ Terminals	Package	Package size (l x w x h) (mm)	Lead pitch (mm)	Package	Packing method and tape dimension	Reel dimension (d x w) (mm)	Packing quantity and ordering code (12NC ending)															
							500	800	1000	1400	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	9000	10000
8	XSON8 (SOT1203)	1.35 x 1.00 x 0.35	0.35		4mm pitch, 8mm tape and reel	180 x 8												-115				
	VSSOP8 (SOT765-1)	2.00 x 2.30 x 1.00	0.5		4mm pitch, 8mm tape and reel	180 x 8												-125				
	TSSOP8 (SOT505-2)	3.00 x 3.00 x 1.10	0.65		4mm pitch, 12mm tape and reel	180 x 12												-125				
	TSSOP8 (SOT530-1)	3.00 x 3.40 x 1.10	0.65				330 x 12											-118				
	LFPAK33 (SOT1210)	3.30 x 3.30 x 0.85	-		8 mm pitch, 12 mm tape and reel	180 x 12												-115				
	SOT96 (SO8)	4.90 x 3.90 x 1.75	1.27		8 mm pitch, 12 mm tape and reel	180 x 12												-115				
					8 mm pitch, 12 mm tape and reel	330 x 12												-518				
					8 mm pitch, 12 mm tape and reel	331 x 12												-118				
10	LFPAK56D (SOT1205)	4.90 x 4.45 x 1.00	1.27		8 mm pitch, 12 mm tape and reel	180 x 12												-115				
	X2QFN10 (SOT1430-1)	1.30 x 1.60 x 0.33	0.40		4 mm pitch, 8 mm tape and reel	180 x 8													-471			
	DFN2510-10 (SOT1165)	2.50 x 1.00 x 0.48	0.5		4 mm pitch, 8 mm tape and reel	180 x 8												-115				
	HVSQN10 (SOT650)	3.00 x 3.00 x 0.85	0.5		8mm pitch, 12mm tape and reel	330 x 12													-118			
14	TSSOP10 (SOT552-1)	3.00 x 3.00 x 1.10	0.50		8 mm pitch, 12 mm tape and reel	330 x 12												-118				
	DHVQFN14 (SOT762-1)	3.00 x 2.50 x 1.00	0.50		4 mm pitch, 12 mm tape and reel	180 x 12												-115				
	TSSOP14 (SOT402-1)	5.00 x 4.40 x 1.10	0.65		8mm pitch, 12mm tape and reel	330 x 12												-118				
	SSOP14 (SOT337-1)	6.20 x 5.30 x 2.00	0.65		12 mm pitch, 16 mm tape and reel	330 x 16												-118				
16	SO14 (SOT108-1)	8.65 x 3.9 x 1.45	1.27		8mm pitch, 16mm tape and reel	330 x 16												-118				
	TSSOP16 (SOT403-1)	5.00 x 4.40 x 1.10	0.65		8mm pitch, 12mm tape and reel	330 x 12												-118				
	SSOP16 (SOT519-1)	4.90 x 3.90 x 1.73	0.64		8 mm pitch, 12 mm tape and reel	330 x 12												-118				
	SSOP16 (SOT338-1)	6.20 x 5.30 x 2.00	0.65		12mm pitch, 16mm tape and reel	330 x 16												-118				
20	SO16 (SOT109-1)	9.90 x 3.90 x 1.35	1.27		8 mm pitch, 16 mm tape and reel	330 x 16												-118				
	DHXQFN20 (SOT1045-2)	4.50 x 2.50 x 0.50	0.50			180 x 12												-115				
	DHVQFN20 (SOT764-1)	4.50 x 2.50 x 1.00	0.5		4mm pitch, 12mm tape and reel	180 x 12												-115				
	TSSOP20 (SOT360-1)	6.50 x 4.40 x 1.10	0.65		8 mm pitch, 16 mm tape and reel	330 x 16												-118				
	SSOP20 (SOT339-1)	7.20 x 5.30 x 2.00	0.65		12mm pitch, 16mm tape and reel	330 x 16												-118				
24	SO20 (SOT163-1)	12.80 x 7.50 x 2.65	1.27		12mm pitch, 24mm tape and reel	330 x 24												-118				
	DHVQFN24 (SOT815-1)	5.50 x 3.50 x 0.85	0.5		8mm pitch, 12mm tape and reel	330 x 12												-118				
	TSSOP24 (SOT355-1)	7.80 x 4.40 x 1.10	0.65		8mm pitch, 16mm tape and reel	330 x 16												-118				
32	SO24 (SOT137-1)	15.40 x 7.50 x 2.65	1.27		12mm pitch, 24mm tape and reel	330 x 24											-118					
	DFN5050-32 (SOT617)	5.00 x 5.00 x 1.00	0.5		8 mm pitch, 12 mm tape and reel	330 x 12													-118	-128		
48	TSSOP48 (SOT480-1)	9.70 x 4.40 x 1.10	0.40			330 x 16												-118				
	TSSOP48 (SOT362-1)	12.50 x 6.10 x 1.20	0.50		12 mm pitch, 24 mm tape and reel	330 x 24												-118				
56	VFBGA56 (SOT702-1)	4.50 x 7.00 x 1.00	0.65		8 mm pitch, 16 mm tape and reel	330 x 16												-518				
	TSSOP56 (SOT364-1)	14.00 x 6.10 x 1.20	0.50		12 mm pitch, 24 mm tape and reel	330 x 24												-118				
96	LFBGA96 (SOT536-1)	5.50 x 13.50 x 1.50	0.80		8 mm pitch, 24 mm tape and reel	330 x 24												-518				

Packing details glass diodes, single ended and through hole packages

Pins/ leads	Package	Packing method and tape/reel/tube dimensions	Package	Ordering code (12 NC ending)	Packing quantity
	I2PAK (SOT226)	Rail packing, 50 pcs/tube, tube length = 520 mm		-127	20 tubes x 50 pcs

Package cross reference

Package cross reference list – Part 1

Type	Competitor	Nexperia	Pins/Leads
µQFN-2L	ST	DFN1006-2 (SOD882)	2
6 Lead DFN	ON Semi	DFN2020-6 (SOT1118)	6
CMAK/CMPAK	Renesas	SOT323	3
CMPAK-5(T)	Renesas	SOT353	5
CMPAK-6	Renesas	SOT363	6
CMPAK/CMAK	Renesas	SOT323	3
CP4	Toshiba	SOT143B	4
CPT3	Rohm	DPAK (SOT428)	3
CS6	Toshiba	DFN1010-6 (SOT891)	6
CST3	Toshiba	DFN1006-3 (SOT883)	3
CST3	Toshiba	DFN1006B-3 (SOT883B)	3
CTS2 (FSC)	Toshiba	DFN1006-2 (SOD882)	2
CTS2 (FSC)	Toshiba	DFN1006D-2 (SOD882D)	2
D2PAK	ON Semi	D2PAK (SOT404)	3
D2PAK	Vishay	D2PAK (SOT404)	3
D2PAK	Toshiba	D2PAK (SOT404)	3
D2PAK	Infineon	D2PAK (SOT404)	3
D2PAK	ST	D2PAK (SOT404)	3
D2PAK 3	ON Semi	D2PAK (SOT404)	3
D2PAK-3	OnSemi	D2PAK (SOT404)	3
D2PAK-7	ST	D2PAK-7 (SOT427)	7
D2PAK*	Diodes Inc.	D2PAK (SOT404)	3
D2PAK7P	Infineon	D2PAK-7 (SOT427)	7
DFN-5	OnSemi	LFPAK56 (SOT669)	4
DFN-8	OnSemi	LFPAK56D (SOT1205)	8
DFN1006-3	Diodes Inc.	DFN1006-3 (SOT883)	3
DFN1006H4-3	Diodes Inc.	DFN1006-3 (SOT883)	3
DFN1411*	Diodes Inc.	DFN1010D-3 (SOT1215)	3
DPAK	ON Semi	DPAK (SOT428)	3
DPAK	Toshiba	DPAK (SOT428)	3
DPAK	OnSemi	DPAK (SOT428)	3
DPAK	Infineon	DPAK (SOT428)	3
DPAK	ST	DPAK (SOT428)	3
DPAK(S)	Renesas	DPAK (SOT428)	3
DSN2, 1.0 x 0.6	ON Semi	DFN1006D-2 (SOD882D)	2
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2
DSN2, 1.6 x 0.8	ON Semi	DFN1608D-2 (SOD1608)	2
EMD2	Rohm	SOT523	2
EMD3/EMT3	Rohm	DFN1006-3 (SOT883)	3
EMD5/EMT5	Rohm	SOT665	5
EMD6/EMT6/WEMT6	Rohm	SOT666	6
EMT3	Rohm	DFN1006-3 (SOT883)	3
EMT3/EMD3	Rohm	DFN1006-3 (SOT883)	3
EMT3E*	Rohm	DFN1006-3 (SOT883)	3
EMT5*	Rohm	SOT666	6
EMT5/EMD5	Rohm	SOT665	5
EMT6	Rohm	SOT666	6
EMT6/EMD6/WEMT6	Rohm	SOT666	6
ES6	Toshiba	SOT666	6

Types with * show footprint compatibility only

Type	Competitor	Nexperia	Pins/Leads
ES6 ESV	Toshiba	SOT666	6
ESC/TESC	Toshiba	SOD523	2
ESM	Toshiba	DFN1006-3 (SOT883)	3
ESV	Toshiba	SOT665	5
ESV	Toshiba	SOT666	6
FM8	Toshiba	SOT96	8
FS6*	Toshiba	DFN1010B-6 (SOT1216)	6
H2PAK-2	ST	D2PAK (SOT404)	3
H2PAK-6	ST	D2PAK-7 (SOT427)	7
HSMT8	Rohm	LFPAK33 (SOT1210)	8
HSON-8	Renesas	LFPAK56 (SOT669)	4
HSON-8 Dual	Renesas	LFPAK56D (SOT1205)	8
HSOP8 (Dual)	Rohm	LFPAK56D (SOT1205)	8
HSOP8 (Single)	Rohm	LFPAK56 (SOT669)	4
HUML2020L8 (Dual)	Rohm	DFN2020-6 (SOT1118)	6
HUML2020L8 (Single)	Rohm	DFN2020MD-6 (SOT1220)	6
I2PAK	OnSemi	I2PAK (SOT226)	3
I2PAK	ST	I2PAK (SOT226)	3
KMD2	Rohm	DFN1608D-2 (SOD1608)	2
LDPAK(S)-1	Renesas	D2PAK (SOT404)	3
LFPAK	Renesas	LFPAK (SOT669)	5
LG A 1.0 x 0.6mm	Texas Instruments	DFN1006B-3 (SOT883B)	3
LLD	Renesas	SOD80C	2
LLDS	Rohm	SOD80C	2
LLP1006-2L	Vishay	DFN1006-2 (SOD882)	2
LLP1006-2L	Vishay	DFN1006D-2 (SOD882D)	2
LLP1006-2M	Vishay	DFN1006-2 (SOD882)	2
LLP1006-2M	Vishay	DFN1006D-2 (SOD882D)	2
LPDS/LPTS	Rohm	D2PAK (SOT404)	3
LPTS	Rohm	D2PAK (SOT404)	3
LPTS/LPDS	Rohm	D2PAK (SOT404)	3
M-Flat	Toshiba	SOD128	2
Micro 3	Int. Rectifier	SOT23	3
Micro 6	Int. Rectifier	SOT457	6
MiCRO FOOT 0.8 x 0.8*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1 x 1.2*	Vishay	DFN1010D-3 (SOT1215)	3
MICRO FOOT 1 x 1.5*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1 x 1*	Vishay	DFN1010D-3 (SOT1215)	3
MiCRO FOOT 1.6 x 1.6*	Vishay	DFN2020MD-6 (SOT1220)	6
MICRO FOOT*	Vishay	DFN2020MD-6 (SOT1220)	6
MicroFET	Fairchild	DFN2020MD-6 (SOT1220)	6
MicroFET 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
MiniMelf	Diodes Inc.	SOD80C	2
MiniMelf	ST	SOD80C	2
MiniMelf	Vishay	SOD80C	2
MP-25SK	Renesas	I2PAK (SOT226)	3
MP-25ZT	Renesas	D2PAK-7 (SOT427)	7
MP-25ZT	Renesas	D2PAK (SOT404)	3
MP-3Z	Renesas	DPAK (SOT428)	3

Package cross reference list – Part 2

Type	Competitor	Nexperia	Pins/Leads
MPAK	Renesas	SOT23	3
MPAK	Renesas	SOT23	3
MPAK-4R	Renesas	SOT143B	4
MPT3	Rohm	SOT89	3
PG-TD SON-8	Infineon	LFPAK (SOT669)	5
PG-TDS0N-8	Infineon	LFPAK56D (SOT1205)	8
PG-TDS0N-8	Infineon	LFPAK56 (SOT669)	4
PG-TO252-3	Infineon	DPAK (SOT428)	3
PG-TO262-3	Infineon	I2PAK (SOT226)	3
PG-TO263-3	Infineon	D2PAK (SOT404)	3
PG-TO263-7	Infineon	D2PAK-7 (SOT427)	7
PG-TSDSON-8	Infineon	LFPAK33 (SOT1210)	8
PMDT	Rohm	SOD128	2
PMDU	Rohm	SOD123W	2
Power DI3333-8	Diodes Inc.	LFPAK33 (SOT1210)	8
Power DI5060-8	Diodes Inc.	LFPAK56D (SOT1205)	8
Power DI5060-8	Diodes Inc.	LFPAK56 (SOT669)	4
Power FLAT 3.3 x 3.3	ST	LFPAK33 (SOT1210)	8
Power FLAT 5x6 Dual	ST	LFPAK56D (SOT1205)	8
Power FLAT 5x6 Dual	ST	LFPAK56 (SOT669)	4
PowerDI123	Diodes Inc.	SOD123F	2
PowerDI123	Diodes Inc.	SOD123W	2
PowerDI323	Diodes Inc.	SOD323F	2
PowerDi5	Diodes Inc.	CFP15 (SOT1289)	3
PowerFLAT (6 x 5)	ST	LFPAK56 (SOT669)	5
PowerFLAT (6 x 5)	ST	LFPAK56D (SOT1205)	5
PowerPAK 1212-8	Vishay	LFPAK33 (SOT1210)	8
PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6
PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPak SC-70-6L	Vishay	DFN2020-6 (SOT1118)	6
PowerPak SC-75-6L*	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC-75*	Vishay	DFN2020MD-6 (SOT1220)	6
PowerPAK SC706L	Vishay	DFN2020-3 (SOT1061)	3
PowerPAK SO-8	Vishay	LFPAK56 (SOT669)	5
PowerPAK SO-8(L)	Vishay	LFPAK56 (SOT669)	4
PowerPAK SO-8L Dual	Vishay	LFPAK56D (SOT1205)	8
PW-Mini	Toshiba	SOT89	3
S-Flat	Toshiba	SOD123F	2
S-Flat	Toshiba	SOD123W	2
S-Mini	Toshiba	SOT23	3
S-Mini TSM	Toshiba	SOT23	3
S08	Vishay	SOT96	8
SC-70	ON Semi	SOT323	3
SC-70, 3 leads	Vishay	SOT323	3
SC-74 TSOP-6	ON Semi	SOT457	6
SC-75	ON Semi	DFN1006-3 (SOT883)	3
SC-75	Semtech	DFN1006-3 (SOT883)	3
SC-75A	Vishay	DFN1006-3 (SOT883)	3

Types with * show footprint compatibility only

Type	Competitor	Nexperia	Pins/Leads
SC-88	ON Semi	SOT363	6
SC-88A	ON Semi	SOT353	5
SC-89	Semtech	SOT666	6
SC59	Diodes Inc.	SOT23	3
SC70	ON Semi	SOT323	3
SC70-3	Vishay	SOT323	3
SC70-3	AOS	SOT323	3
SC70-5L	Semtech	SOT353	5
SC70-6	Vishay	SOT363	6
SC70-6	AOS	SOT363	6
SC70-6	Fairchild	SOT363	6
SC70-6L	Semtech	SOT363	6
SC74 TSOP6	Infineon	SOT457	6
SC75	Infineon	DFN1006-3 (SOT883)	3
SC75	ON Semi	DFN1006-3 (SOT883)	3
SC75A	Vishay	DFN1006-3 (SOT883)	3
SC79	Infineon	SOD523	2
SC88/SC 7 0-6/SOT 363 6 LEAD	ON Semi	SOT363	6
SC89	Fairchild	SOT666	6
SC89-3	Vishay	DFN1006-3 (SOT883)	3
SC89-3	ON Semi	DFN1006-3 (SOT883)	3
SC89-3	Fairchild	DFN1006-3 (SOT883)	3
SC89-6	Vishay	SOT666	6
SC89-6	AOS	SOT666	6
SC89-6	Fairchild	SOT666	6
SC89-6lead	Vishay	SOT666	6
SLP1006P2	Semtech	DFN1006-2 (SOD882)	2
SLP1006P2T	Semtech	DFN1006D-2 (SOD882D)	2
SLP1006P3	Semtech	DFN1006-3 (SOT883)	3
SLP1006P3T	Semtech	DFN1006B-3 (SOT883B)	3
SLP1610N2	Semtech	DFN1608D-2 (SOD1608)	2
SLP1713P8	Semtech	DFN1714U-8 (SOT983)	8
SLP2513P12	Semtech	DFN2514-12 (SOT1167)	12
SM6 VS-6	Toshiba	SOT457	6
SMA flat	ST	SOD128	2
SMD TO-263	Renesas	D2PAK (SOT404)	3
SMD6/SMT6	Rohm	SOT457	6
SMD6/SMZ6	Rohm	SOT457	6
SMFPAK-6	Renesas	SOT666	6
SMPAK	Renesas	DFN1006-3 (SOT883)	3
SMPC TO-277A	Vishay	CFP15 (SOT1289)	3
SMT3	Rohm	SOT23	3
SMT5*	Rohm	SOT457	6
SMT6	Rohm	SOT457	6
SMZ6/SMD6	Rohm	SOT457	6
SO-8 FL	ON Semi	LFPAK56 (SOT669)	5
SO-8FL Dual	OnSemi	LFPAK56D (SOT1205)	8
SO-8FL Dual	OnSemi	LFPAK56 (SOT669)	4
SOD-123	ST	SOD123F	2

Package cross reference

Package cross reference list – Part 3

Type	Competitor	Nexperia	Pins/Leads
SOD-123-FL	ON Semi	SOD123F	2
SOD-123-FL	ON Semi	SOD123W	2
SOD-323	ON Semi	SOD323	2
SOD-323	Diodes Inc.	SOD323	2
SOD-323	ST	SOD323	2
SOD-523	ON Semi	SOD523	2
SOD-523	ST	SOD523	2
SOD323	Infineon	SOD323	2
SOD323	Vishay	SOD323	2
SOD323	Semtech	SOD323	2
SOD523	Diodes Inc.	SOD523	2
SOD523	Vishay	SOD523	2
SOD523	Semtech	SOD523	2
SOD882	ST	DFN1006-2 (SOD882)	2
SOD882T	ST	DFN1006D-2 (SOD882D)	2
SOD923-2*	ON Semi	DFN1006-2 (SOD882)	2
SOIC-8 NB	ON Semi	SOT96	8
SON 2x2	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SON 3x3*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
SOP-8	Renesas	SOT96	8
SOP/DSOP Advance	Toshiba	LFPAK56 (SOT669)	4
SOP8	Rohm	SOT96	8
SOT 143	Infineon	SOT143B	4
SOT-143	Semtech	SOT143B	4
SOT-143	Diodes Inc.	SOT143B	4
SOT-223	ON Semi	SOT223	4
SOT-223	Diodes Inc.	SOT223	4
SOT-223	OnSemi	SOT223	3
SOT-223	Infineon	SOT223	3
SOT-223	ST	SOT223	3
SOT-23	ON Semi	SOT23	3
SOT-23	Diodes Inc.	SOT23	3
SOT-323	Diodes Inc.	SOT323	3
SOT-323	ST	SOT323	3
SOT-363	Diodes Inc.	SOT363	6
SOT-553	ON Semi	SOT665	5
SOT-563	ON Semi	SOT666	6
SOT-89	ON Semi	SOT89	3
SOT063*	ON Semi	DFN101 OB-6 (SOT1216)	6
SOT223	Vishay	SOT223	4
SOT223	Infineon	SOT223	4
SOT223	Fairchild	SOT223	4
SOT223	ON Semi	SOT223	4
SOT223	Diodes Inc.	SOT223	4
SOT223	Diodes Inc.	SOT223	3
SOT23	Infineon	SOT23	3
SOT23	ST	SOT23	3
SOT23	Vishay	SOT23	3
SOT23	Semtech	SOT23	3

Type	Competitor	Nexperia	Pins/Leads
SOT23	Diodes Inc.	SOT23	3
SOT23	AOS	SOT23	3
SOT23	ON Semi	SOT23	3
SOT23-3	Diodes Inc.	SOT23	3
SOT23-3	AOS	SOT23	3
SOT23-3	ON Semi	SOT23	3
SOT23-5	AOS	SOT457	6
SOT23-5	Diodes Inc.	SOT457	6
SOT23-6	Diodes Inc.	SOT457	6
SOT23-6	ST	SOT457	6
SOT23-6	Diodes Inc.	SOT457	6
SOT23-6L	Semtech	SOT457	6
SOT23F	Toshiba	SOT23	3
SOT23F	Diodes Inc.	SOT23	3
SOT26	Diodes Inc.	SOT457	6
SOT323	Infineon	SOT323	3
SOT323	Diodes Inc.	SOT323	3
SOT323	Fairchild	SOT323	3
SOT353	Diodes Inc.	SOT353	5
SOT353	Vishay	SOT353	5
SOT353	Diodes Inc.	SOT363	6
SOT363	Infineon	SOT363	6
SOT363	Diodes Inc.	SOT363	6
SOT523	Diodes Inc.	DFN1006-3 (SOT883)	3
SOT523F	Fairchild	DFN1006-3 (SOT883)	3
SOT563	Diodes Inc.	SOT666	6
SOT563-6	ON Semi	SOT666	6
SOT563F	Fairchild	SOT666	6
SOT666	Infineon	SOT666	6
SOT723-3*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT723*	ON Semi	DFN1010D-3 (SOT1215)	3
SOT89	Infineon	SOT89	3
SOT89	Diodes Inc.	SOT89	3
SOT89-3L	Diodes Inc.	SOT89	3
SOT963	ON Semi	DFN1010-6 (SOT891)	6
SOT963*	Diodes Inc.	DFN1010B-6 (SOT1216)	6
SRP-F	Renesas	SOD123W	2
SS CSP2	Toshiba	DFN1006-3 (SOT883)	3
SSD3/SST3	Rohm	SOT23	3
SSM	Toshiba	DFN1006-3 (SOT883)	3
SSOT3	Fairchild	SOT23	3
SSOT6	Fairchild	SOT457	6
SSOT6 FLMP	Fairchild	SOT457	6
SST3	Rohm	SOT23	3
SST3/SSD3	Rohm	SOT23	3
Stmite flat	ST	SOD123W	2
T0263	Diodes Inc.	D2PAK(SOT404)	3
T0263-3	Infineon	D2PAK (SOT404)	3
Thin PowerPAK SC-70	Vishay	DFN2020-6 (SOT1118)	6

Types with * show footprint compatibility only

Package cross reference list – Part 4

Type	Competitor	Nexperia	Pins/Leads
Thin PowerPAK SC-70	Vishay	DFN2020MD-6 (SOT1220)	6
Thin PowerPAK SC70	Vishay	DFN2020MD-6 (SOT1220)	6
Thin PowerPAK SC75*	Vishay	DFN2020MD-6 (SOT1220)	6
TO-220S	Renesas	D2PAK (SOT404)	3
TO-220SM	Toshiba	D2PAK (SOT404)	3
TO-252	Renesas	DPAK (SOT428)	3
TO-252	Vishay	DPAK (SOT428)	3
TO-252 (MP-3ZK)	Renesas	DPAK (SOT428)	3
TO-252 reverse, TO-252	Vishay	DPAK (SOT428)	3
TO-252-3/-3-23	Infineon	DPAK (SOT428)	3
TO-252, TO-252 reverse	Vishay	DPAK (SOT428)	3
TO-262	Renesas	I2PAK (SOT226)	3
TO-262	Vishay	I2PAK (SOT226)	3
TO-262-2L	OnSemi	I2PAK (SOT226)	3
TO-262-3L	OnSemi	I2PAK (SOT226)	3
TO-263	Renesas	D2PAK-7 (SOT427)	7
TO-263	Renesas	D2PAK (SOT404)	3
TO-263	Vishay	D2PAK (SOT404)	3
TO-263 3-lead	Vishay	D2PAK (SOT404)	3
TO-263-2L	OnSemi	D2PAK (SOT404)	3
TO-263-7L	Vishay	D2PAK-7 (SOT427)	7
TO-263AB	Vishay	D2PAK (SOT404)	3
TO252	Diodes Inc.	DPAK (SOT428)	3
TO262	Infineon	I2PAK (SOT226)	3
TO263	Diodes Inc.	D2PAK (SOT404)	3
TP-FA	OnSemi	DPAK (SOT428)	3
TSLP-2-1	Infineon	DFN1006-2 (SOD882)	2
TSLP-2-7/-17	Infineon	DFN1006D-2 (SOD882D)	2
TSLP-3-1, -15	Infineon	DFN1006B-3 (SOT883B)	3
TSLP-3-4	Infineon	DFN1006-3 (SOT883)	3
TSMT5*	Rohm	SOT457	6
TSMT6	Rohm	SOT457	6
TSNP-2-2	Infineon	DFN1608D-2 (SOD 1608)	2
TSOPN Advance	Toshiba	LFPAK33 (SOT1210)	8
TSOP-6	Renesas	SOT457	6
TSOP-6/ TSOP6	Vishay	SOT457	6
TSOP6	Vishay	SOT457	6
TSOP6	AOS	SOT457	6
TSOP6	ON Semi	SOT457	6
TSST8*	Rohm	DFN2020MD-6 (SOT1220)	6
TUMT3	Rohm	SOT323	3
TUMT5*	Rohm	DFN2020-6 (SOT1118)	6
TUMT6*	Rohm	DFN2020-6 (SOT1118)	6
U-DFN2020-3 Type B 2.0 x 2.0 x 0.6	Diodes Inc.	DFN2020-3 (SOT1061)	3
U-DFN2020-6	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
U-DFN2523-6*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN 1.7 x 1.35, 0.4P	ON Semi	DFN1714U-8 (SOT983)	8
UDFN-6 WDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN12 2.5 x 1.35, 0.4P	ON Semi	DFN2514-12 (SOT1167)	12

Types with * show footprint compatibility only

Type	Competitor	Nexperia	Pins/Leads
UDFN2020-6 Type B	Diodes Inc.	DFN2020-6 (SOT1118)	6
UDFN2020-6 Type E	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
UDFN6	Toshiba	DFN2020-6 (SOT1118)	6
UDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
UDFN6B	Toshiba	DFN2020MD-6 (SOT1220)	6
UF6	Toshiba	SOT363	6
UF6/ USV/ US6	Toshiba	SOT363	6
UFP	Renesas	SOD523	2
UMD2	Rohm	SOD323F	2
UMD3/UMT3	Rohm	SOT323	3
UMD5/UMT5	Rohm	SOT353	5
UMD6/UMT6	Rohm	SOT363	6
UMLP 1.6 x 1.6*	Fairchild	DFN2020MD-6 (SOT1220)	6
UMT3	Rohm	SOT323	3
UMT3F*	Rohm	SOT323	3
UMT5/ UMD5	Rohm	SOT353	5
UMT6	Rohm	SOT363	6
UMT6/ UMD6	Rohm	SOT363	6
UPAK (SOT89)	Renesas	SOT89	3
URP	Renesas	SOD323	2
US-Flat	Toshiba	SOD323F	2
US6	Toshiba	SOT363	6
US6/ UF6/ USV	Toshiba	SOT363	6
use	Toshiba	SOD323	2
USM	Toshiba	SOT323	3
USV	Toshiba	SOT353	5
USV	Toshiba	SOT363	6
USV/ US6/ UF6/	Toshiba	SOT363	6
VESM*	Toshiba	DFN1010D-3 (SOT1215)	3
VML0806*	Rohm	DFN1006B-3 (SOT883B)	3
VML1006	Rohm	DFN1006-3 (SOT883)	3
VMN2*	Rohm	DFN1006-2 (SOD882)	2
VMN2*	Rohm	DFN1006D-2 (SOD882D)	2
VMN3*	Rohm	DFN1006-3 (SOT883)	3
VMT3*	Rohm	DFN1010D-3 (SOT1215)	3
VMT6*	Rohm	DFN101 OB-6 (SOT1216)	6
VS6	Toshiba	SOT457	6
VSON-5	Renesas	SOT665	5
W-DFN3020-8*	Diodes Inc.	DFN2020-6 (SOT1118)	6
WDFN-8	OnSemi	LFPAK33 (SOT1210)	8
WDFN3	ON Semi	DFN2020-3 (SOT1061)	3
WDFN6	ON Semi	DFN2020-6 (SOT1118)	6
WDFN6	ON Semi	DFN2020MD-6 (SOT1220)	6
WEMT6	Rohm	SOT666	6
WEMT6/ EMT6/ EMD6	Rohm	SOT666	6
WLP1.5x 1.5*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
WLPI.Ox 1.0*	Texas Instruments	DFN1010D-3 (SOT1215)	3
WLPI.Ox 1.5*	Texas Instruments	DFN2020MD-6 (SOT1220)	6
X1 -DFN 1006-3	Diodes Inc.	DFN1006-3 (SOT883)	3

Package cross reference

Package cross reference list – Part 5

Type	Competitor	Nexperia	Pins/Leads
X1-DFN1212-3*	Diodes Inc.	DFN1010D-3 (SOT1215)	3
X1-DFN1616-6*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
X2-DFN0806-3	Diodes Inc.	DFN1006-3 (SOT883)	3
X2-DFN1006-2	Diodes Inc.	DFN1006D-2 (SOD882D)	2
X2-DFN1006-3	Diodes Inc.	DFN1006B-3 (SOT883B)	3
X2-DFN1010-3	Diodes Inc.	DFN1010D-3 (SOT1215)	3

Type	Competitor	Nexperia	Pins/Leads
X2-DFN1310-6*	Diodes Inc.	DFN1010B-6 (SOT1216)	6
X2-DFN2015-3*	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
X2-DFN2020-6	Diodes Inc.	DFN2020MD-6 (SOT1220)	6
XDFN3	ON Semi	DFN1006-3 (SOT883)	3
XI-DFN1006-2	Diodes Inc.	DFN1006-2 (SOD882)	2
μ 8FL	OnSemi	LFPAK33 (SOT1210)	8

Package cross reference matrix – Part 1

Pins/leads	Nexperia	Industry standard names	Size (l x w x h) (mm)	P_{tot} (mW)	Package	Competitor synonyms									
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech	
2	DFN1006-2 (SOD882)		1.0 x 0.6 x 0.48	250		(VMN2)	CTS2 (FSC)	(SOD923-2)		TSLP-2-1	XI-DFN1006-2	SOD 882 uQFN-2L	LLP1006-2M LLP1006-2L	SLP1006P2	
	DFN1006D-2 (SOD882D)		1.0 x 0.6 x 0.37	250		(VMN2)	CTS2 (FSC)	DSN2 1.0 x 0.6		TSLP-2-7/-17	X2-DFN1006-2	SOD882T	LLP1006-2L LLP1006-2M	SLP1006P2T	
	DFN1608D-2 (SOD1608)		1.6 x 0.8 x 0.37	780		KMD2		DSN2 1.6 x 0.8		TSNP-2-2				SLP1610N2	
	SOD80C	Mini-Melf	3.5 x 1.5 x 1.5	300		LLDS				LLD		MiniMelf	MiniMelf	MiniMelf	
	SOD123F		2.6 x 1.6 x 1.1	830			S-Flat	SOD-123-FL			PowerDI123	SOD-123			
	SOD123W		2.6 x 1.7 x 1.0	900		PMDU	S-Flat	SOD-123-FL	SRP-F		PowerDI123	Stmite flat			
	SOD128		3.8 x 2.5 x 1.0	1000		PMKT	M-Flat					SMA flat			
	SOD323	SC-76	1.7 x 1.25 x 0.95	400			USC	SOD-323	URP	SOD323	SOD-323	SOD-323	SOD323	SOD323	
	SOD323F	SC-90	1.7 x 1.25 x 0.7	830		UMD2	US-Flat				PowerDI323				
3	CFP15 (SOT1289)		5.8 x 4.3 x 0.78	1200							PowerDi5		SMPC TO-277A		
	DFN1006-3 (SOT883)	SC-101	1.0 x 0.6 x 0.48	250		VML1006	SS CSP2	XDFN3		TSLP-3-4	X1-DFN1006-3			SLP1006P3	
	DFN1006B-3 (SOT883B)		1.0 x 0.6 x 0.37	250		VML1006	CST3	XDFN3		TSLP-3-1,-15	X2-DFN1006-3			SLP1006P3T	
	DFN1010D-3 (SOT1215)		1.1 x 1.0 x 0.37	325		(VMT3)	(VESM)	(SOT723)			X2-DFN1010-3				
	DFN2020-3 (SOT1061)	HU-SON3	2.0 x 2.0 x 0.62	1300				WDFN3			U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L		
	DFN2020D-3 (SOT1061D)		2.0 x 2.0 x 0.62	1300				WDFN3			U-DFN2020-3 Type B 2.0 x 2.0 x 0.6		PowerPAK SC706L		
	DPAK (SOT428)		6.6 x 6.1 x 2.3			CPT3	DPAK		TO-252 (MP-3ZK) DPAK(S)	TO-252-3/-3-2-3 DPAK, PG-TO252-3	TO252	DPAK	TO-252, TO-252 reverse		
	D2PAK (SOT404)		11.0 x 11.0 x 4.3			LPDS/LPTS	TO-220SM D2PAK	D2PAK 3 TO-263-2L	TO-220S / SMD TO-263 D2PAK(S)-(1) MP-25Z	D2PAK, PG-T0263-3	T0263 (D2PAK)	D2PAK, H2PAK-2	TO-263 3-lead TO-263AB / D2PAK TO-263		
	SOT23		2.9 x 1.3 x 1.0	250		SSD3/SST3	S-Mini TSM	SOT-23	MPAK	SOT23	SOT-23	SOT23	SOT23	SOT23	

Types in brackets (...) show footprint compatibility only

Package cross reference matrix – Part 2

Pins/ leads	Nexperia®	Industry standard names	Size (l x w x h) (mm)	P _{tot} (mW)	Package	Competitor synonyms								
						Rohm	Toshiba	ON Semi	Renesas	Infineon	Diodes Inc	ST	Vishay	Semtech
	SOT89	SC-62	4.5 x 2.5 x 1.5	1300		MPT3	PW-Mini	SOT-89	UPAK (SOT89)	SOT89	SOT89			
3	SOT323	SC-70	2.0 x 1.25 x 0.95	200		UMD3/ UMT3 TUMT3	USM	SC-70	CMAK/ CMPAK	SOT323	SOT-323	SOT-323	SC-70 3 leads	SOT-323
	I2PAK (SOT226)		11 x 10 x 4.3					I2PAK, TO-262-2L, TO-262-3L	MP-25SK, TO-262	PG-TO262-3, TO262		I2PAK	TO-262	
	SOT223		6.5 x 3.5 x 1.65					SOT-223		SOT-223	SOT-223	SOT-223		
	LFPAK56 (SOT669)	Power-S08	4.9 x 4.45 x 1.0	3000		HSOP8 (Single)	SOP / DSOP Advance	SO-8 FL, DFN-5	LFPAK56, HSON-8	PG-TD-SON-8	Power-DI5060-8	Power-FLAT (6x5)	PowerPAK SO-8(L)	
4	SOT143B		2.9 x 1.3 x 1.0	250			CP4		MPAK-4R	SOT143	SOT-143			SOT-143
	SOT223	SC-73	6.5 x 3.5 x 1.65	1700				SOT-223		SOT223	SOT-223	SOT-223		
5	SOT353	SC-88 A	2.0 x 1.25 x 0.95	300		UMDS/ UMT5	USV	SC-88 A	CMPAK-5C0		SOT353		SOT353	SC70-5L
	SOT665		1.6 x 1.2 x 0.55	300		EMD5/ EMT5	ESV	SOT-553	VSON-5					
	DFN1010-6 (SOT891)	xSON6	1.0 x 1.0 x 0.48				CS6	SOT963						
	DFN1010B-6 (SOT1216)		1.1 x 1.0 x 0.37	350		(VMT6)	(FS6)	(SOT063)			(SOT963)			
	DFN2020-6 (SOT1118)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
6	DFN2020D-6 (SOT1118D)		2.0 x 2.0 x 0.62	1300		HU-ML2020L8 (Dual)	UDFN6	6 Lead DFN WDFN6			UDFN2020-6 Type B		PowerPAK SC-70 Thin PowerPAK SC-70	
	DFN-2020MD-6 (SOT1220)		2.0 x 2.0 x 0.62	1250		HU-ML2020L8 (Single)	UDFN6B	UDFN-6 WDFN6			UDFN2020-6 Type E		PowerPAK SC-70 Thin PowerPAK SC-70	
	SOT363	SC-88	2.0 x 1.25 x 0.95	300		UMD6/ UMT6	US6 UF6 USV	SC-88	CMPAK-6	SOT363	SOT-363		SC70-6	SC70-6L
	SOT457	SC-74	2.9 x 1.5 x 1.0	750		SMD6/ SMT6	SM6 VS-6	SC-74 TSOP-6	TSOP-6	SC74 TSOP6	SOT23-6 SOT26		TSOP6 TSOP-6	SOT23-6L
	SOT666		1.6 x 1.2 x 0.55	300		EMD6/ EMT6 WEMT6	ES6 ESV	SOT-563	SMFPAK-6	SOT666	SOT563		SC89-6lead	SC-89
7	D2PAK-7 (SOT427)		11 x 10 x 4.3						MP-25ZT, 7pin TO-263	D2PAK7P, PG-TO263-7		D2PAK-7, H2PAK-6	TO-263-7L	
	LFPAK33 (SOT1210)		3.3 x 3.3 x 0.85			HSMT8	TSon Advance	μ8FL, WDFN-8		PG-TSD-SON-8	Power DI3333-8	Power FLAT 3.3 x 3.3	PowerPAK 1212-8	
8	LFPAK56D (SOT1205)		4.9 x 4.45 x 1.0	3000		HSOP8 (Dual)		SO-8FL Dual, DFN-8	HSON-8 dual	PG-TD-SON-8	Power DI5060-8	Power FLAT 5x6 Dual	PowerPAK SO-8L Dual	
	SOT96	S08	4.9 x 3.9 x 1.75	1500		SOP8	FM8	SOIC-8 NB	SOP-8				S08	
	DFN1714U-8 (SOT983)	H xSON8	1.7 x 1.35 x 0.48					UDFN 1.7 x 1.35, 0.4P						SLP1713P8
10	DFN2510-10 (SOT 1165)	xSON10	2.5 x 1.0 x 0.48					UDFN10 2.5 x 1, 0.5P		TSLP-9-1		pQFN-10L		SLP1610P4
12	DFN2512-12 (SOT 1158)	H x-SON12	2.5 x 1.2 x 0.48					UDFN12, 2.5 x 1.2, 0.4P						
	DFN2514-12 (SOT 1167)	HU-SON12	2.5 x 1.35 x 0.53					UDFN12, 2.5 x 1.35, 0.4P						SLP2513P12
16	DFN3312-16 (SOT 1159)	H x-SON16	3.3 x 1.2 x 0.48					UDFN 16, 3.5 x 1.2, 0.4P						


Types in brackets (...) show footprint compatibility only

Packing methods


Competitive cross reference - Logic

This cross reference allows you to match a competitor's part number to a Nexperia part number. Once you have the equivalent part number, check the Nexperia website www.nexperia.com/logic to confirm that the particular configuration is released.


On semiconductor low pin count logic

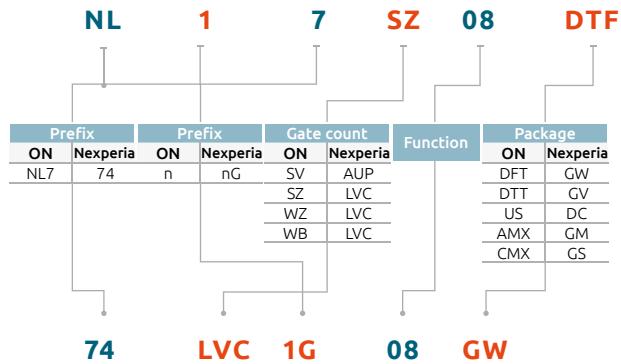


Fairchild semiconductor tiny logic

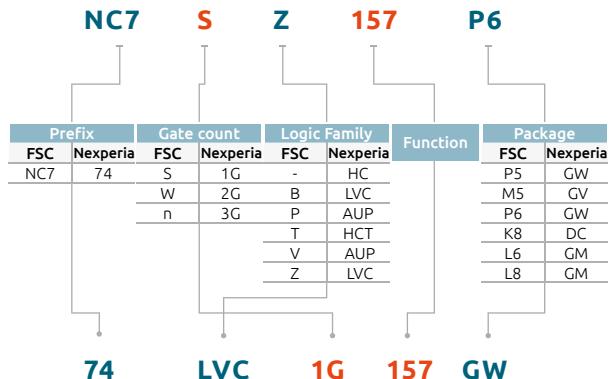


On semiconductors logic

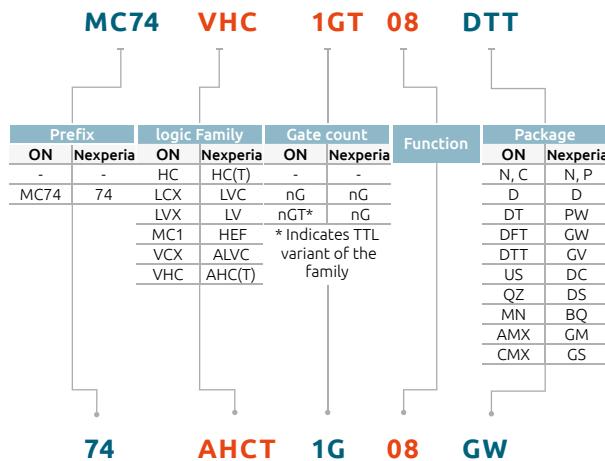


Toshiba one gate

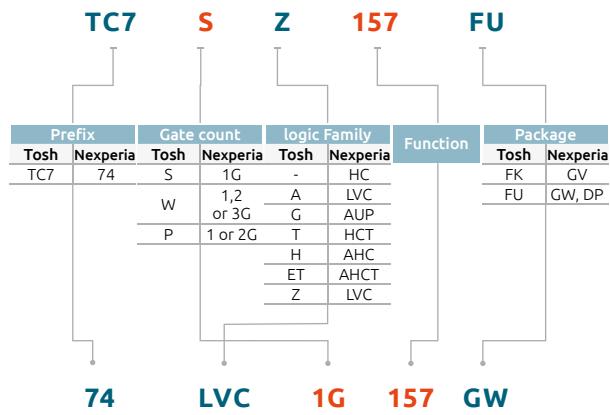


Fairchild semiconductor standard logic

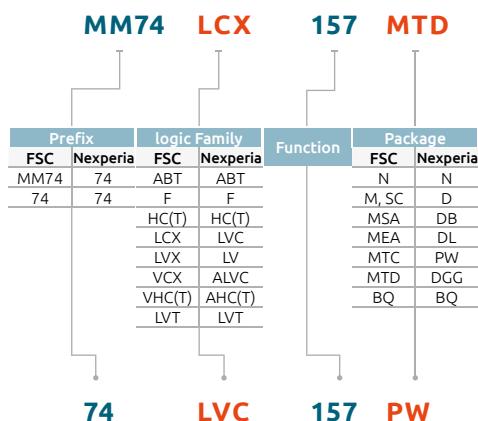


Toshiba standard logic

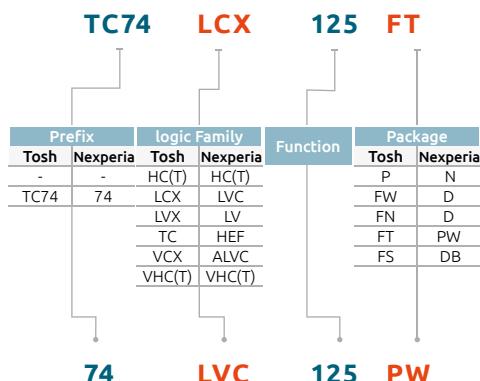


Texas instruments logic

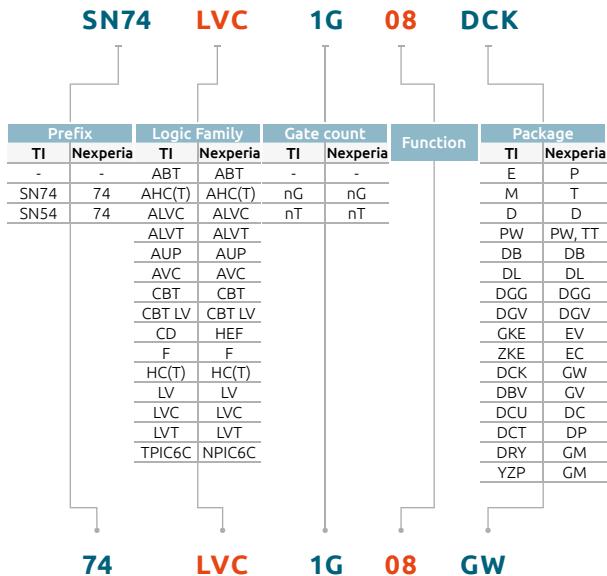


IDT logic

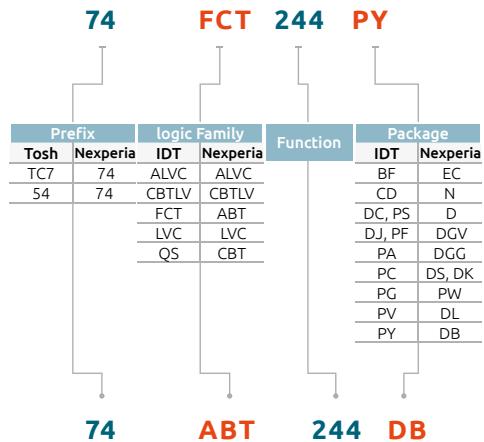

Diodes Inc. logic

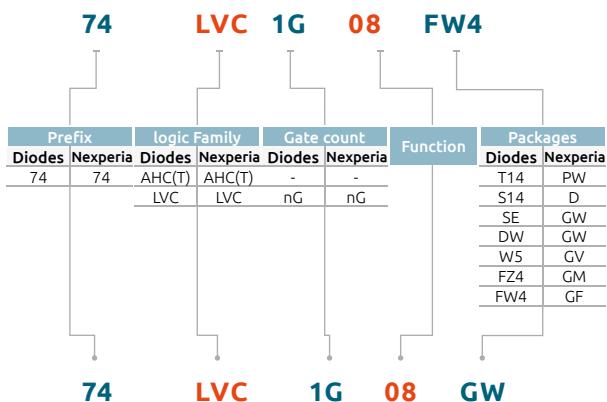

Renesas logic

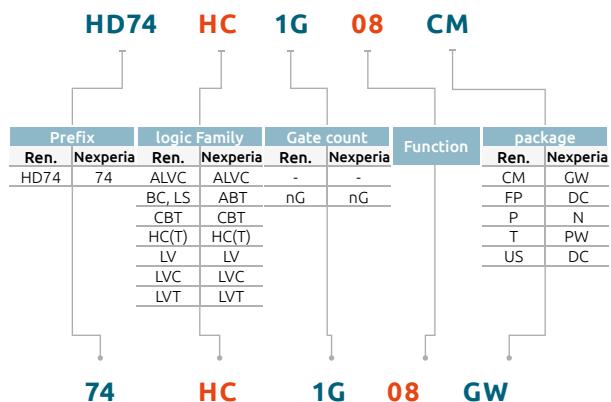

Packing methods

Product orientation (tape and reel pack)


Orientation in tape	Package	Packing 12NC ending
	DFN1006-2 (SOD882)	315
	DFN1006D-2 (SOD882D)	315
	DFN1608D-2 (SOD1608)	315
	SOD80	115, 135
	SOD123F	115
	CFP3 (SOD123W)	115
	SOD123	115, 118
	CFP5 (SOD128)	115
	SOD323	115, 135
	SOD323F	115
	SOD523	115, 135, 315, 335

Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending
	SOT89	146		DFN1010D-3 (SOT1215)	147
				DFN2020-3 (SOT1061)	115, 135
				DFN2020D-3 (SOT1061D)	115, 135
				SOT89	115, 135
				SOT663	115
				CFP15 (SOT1289)	139, 146
				DPAK (SOT428)	118
				D2PAK (SOT404)	118

Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending
	DFN1006-3 (SOT883)	315		SOT89	147
	DFN1006B-3 (SOT883B)	315			
	SOT23	185, 215, 235			
	SOT323	115, 135			
	SOT416	115, 135			

Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending
				SOT89	115, 135









Orientation in tape	Package	Packing 12NC ending	Orientation in tape	Package	Packing 12NC ending
	SOT143B	215, 235			
	SOT223	115, 135			
	DFN1010-4 (SOT1194)	115			

5 pin packages	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		LFPAK56 (SOT669)	115			SOT353	115, 135
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SOT753	125			SOT665	115
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		UMTS (SOT353-1)	125				
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SOS (SOT753)	125				

6 pin packages	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		DFN2020MD-6 (SOT1220)	184			DFN1412-6 (SOT1268)	147
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		LFPAK33 (SOT1210)	115			DFN2020-6 (SOT1118)	115
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		LFPAK56D (SOT1205)	115			DFN2020D-6 (SOT1118D)	115
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		XSON6 (SOT1202)	125			DFN2020MD-6 (SOT1220)	115
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		DFN1010-6 (SOT891)	132			SOT363	115, 135
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		DFN1010E-6 (SOT1202)	132			SOT457	115, 135
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		DFN2020MD-6 (SOT1220)	125			SOT666	115, 315
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SOT363	125, 165				
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SOT457	125, 165				
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SC-88 (SOT363)	125				
	Orientation in tape	Package	Packing 12NC ending		Orientation in tape	Package	Packing 12NC ending
		SC-74 (SOT457)	125				


Packing methods

2-pin SMD packages

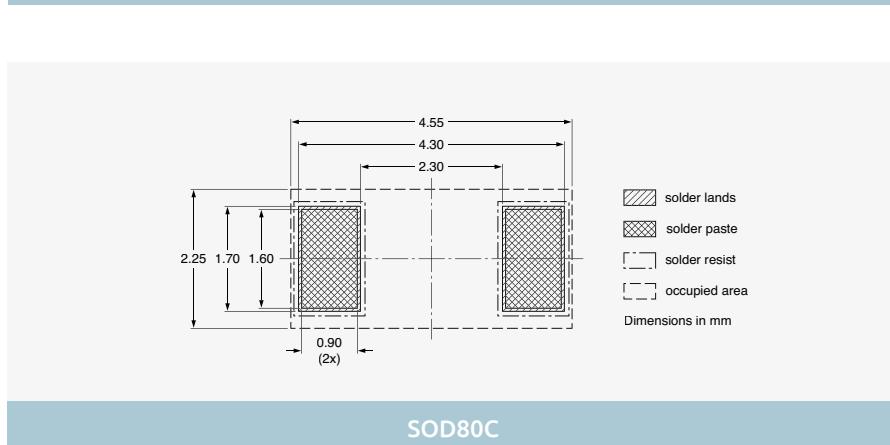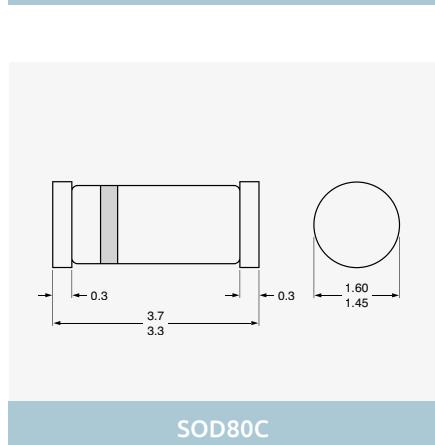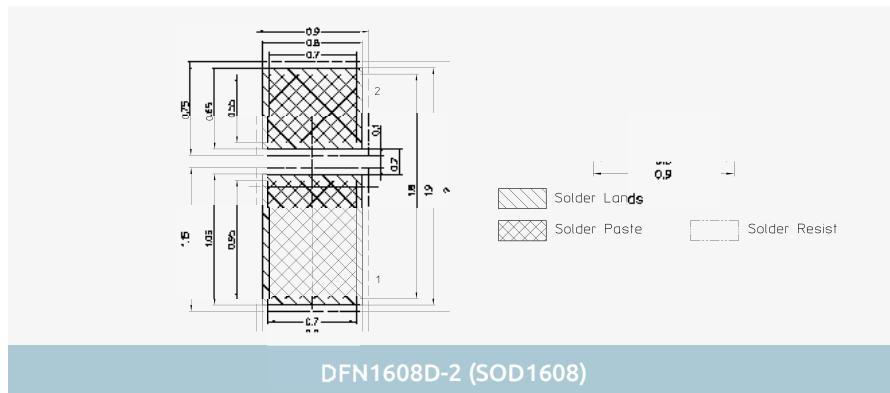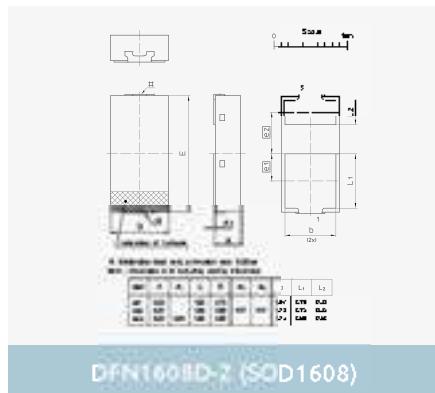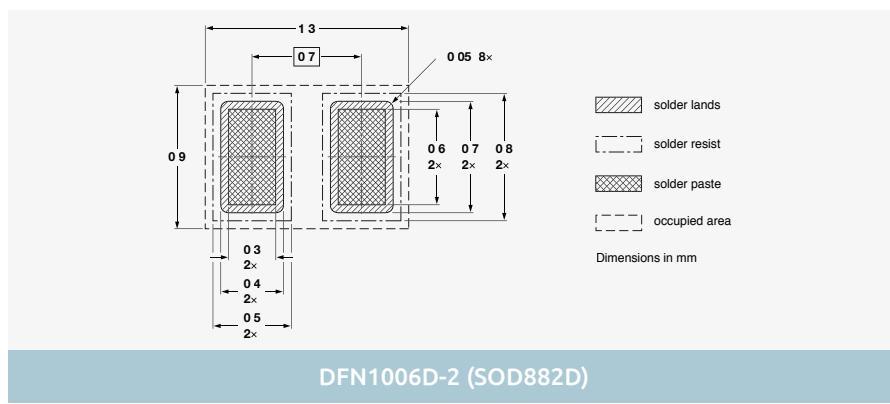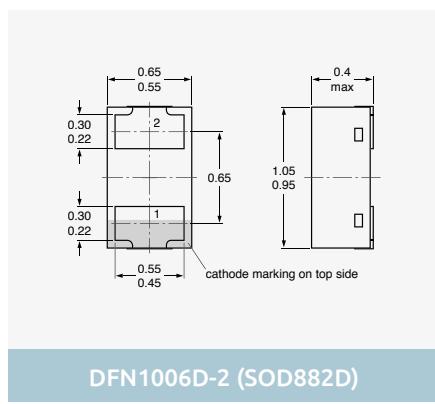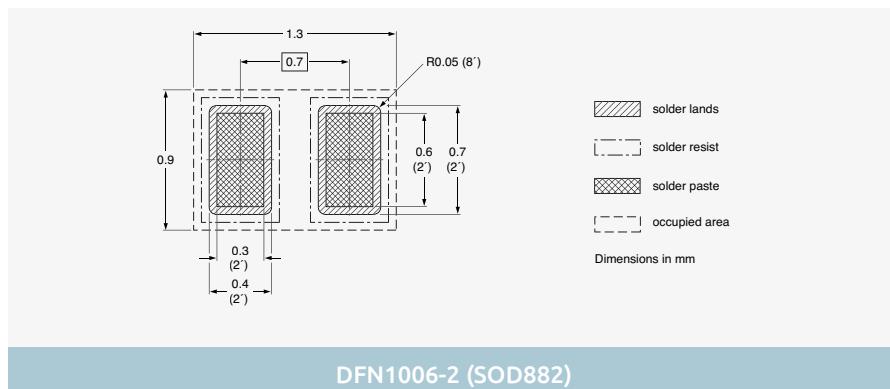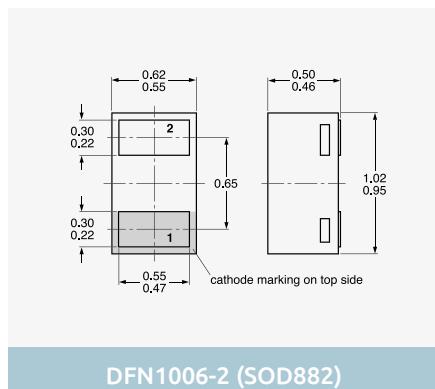


Minimized outline drawings and reflow soldering footprint


2-pin SMD packages

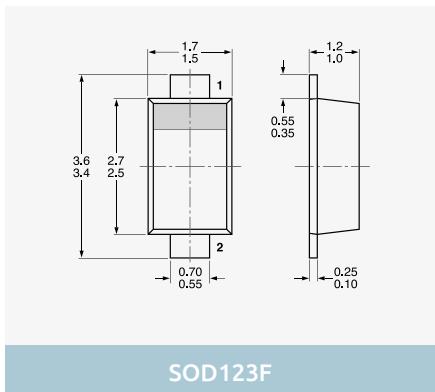


SOD123F

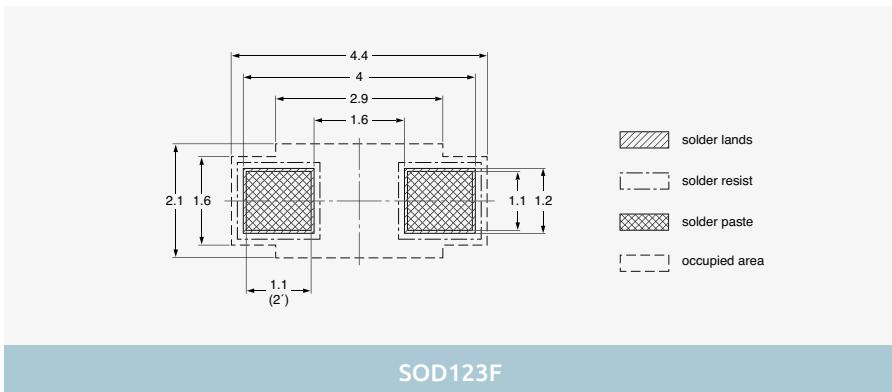


SOD123F

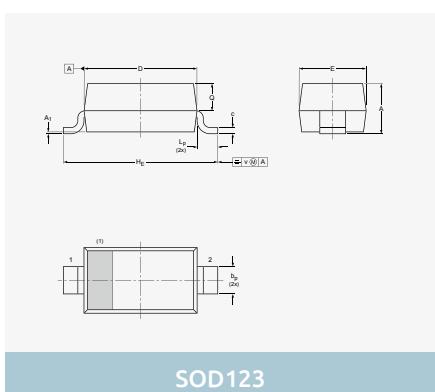


SOD123

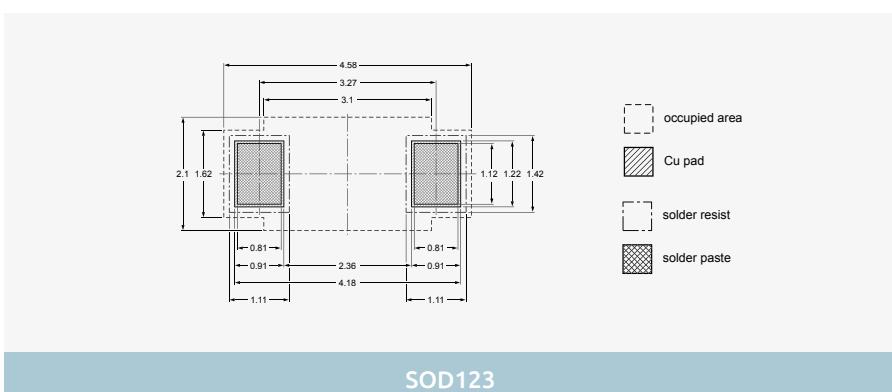


SOD123

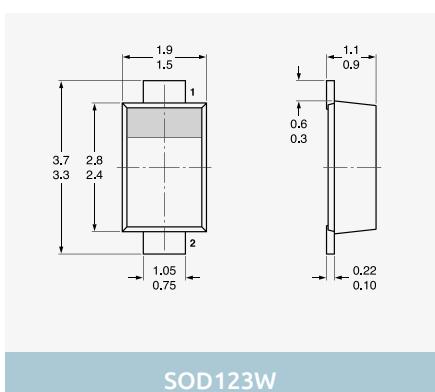


SOD123W

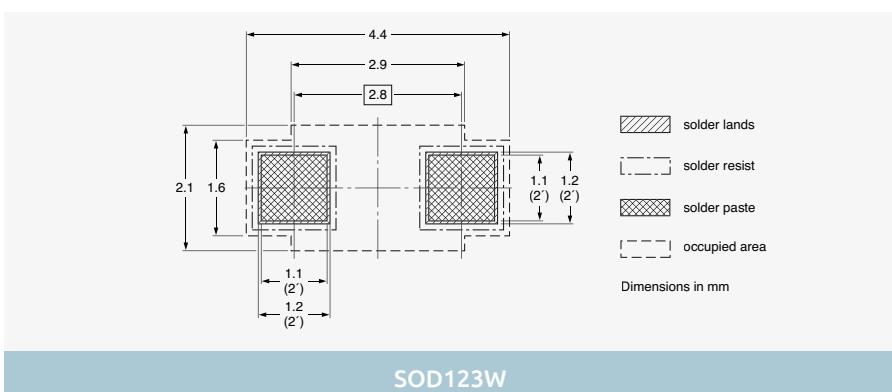

SOD123W

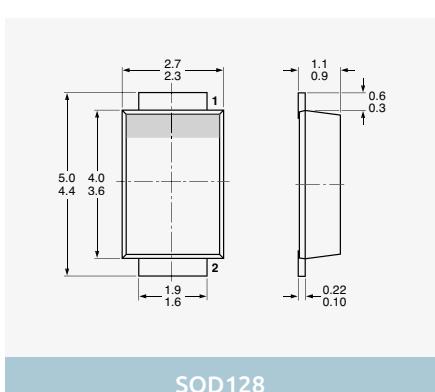


SOD128

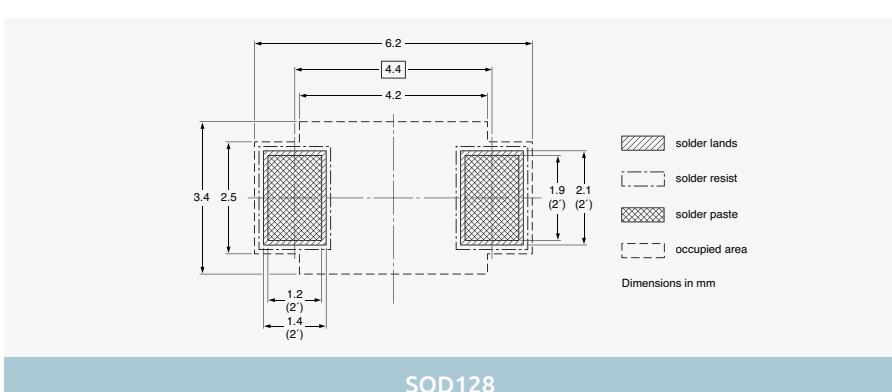


Dimensions in mm


2-pin SMD packages

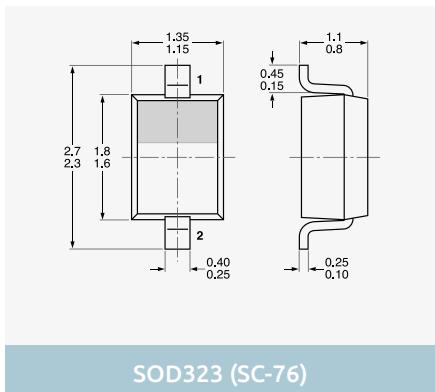


SOD323 (SC-76)

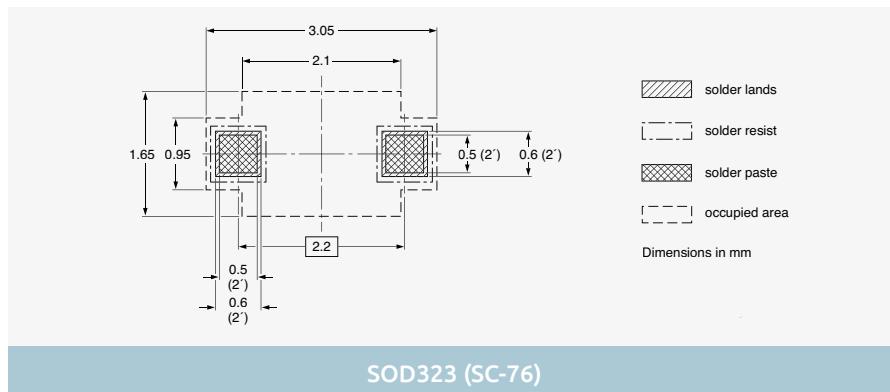


SOD323 (SC-76)

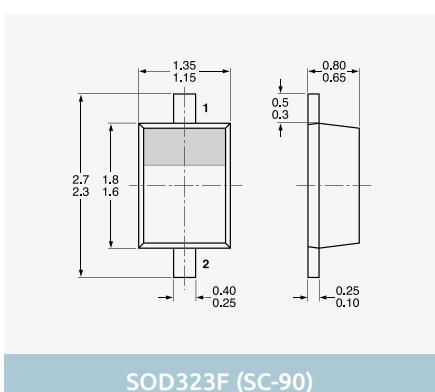


SOD323F (SC-90)

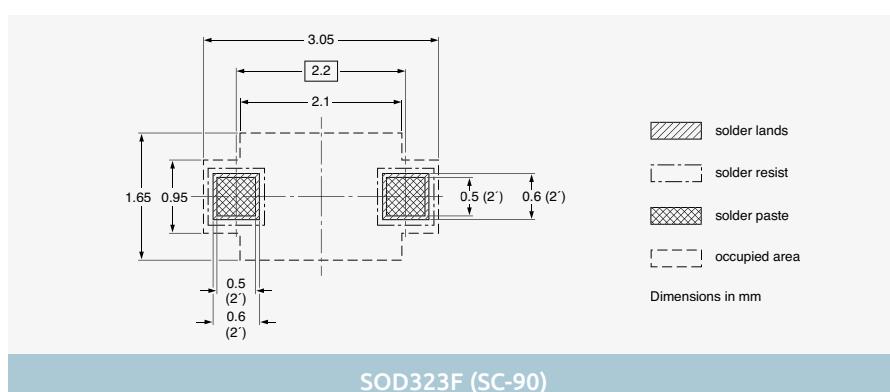

SOD323F (SC-90)

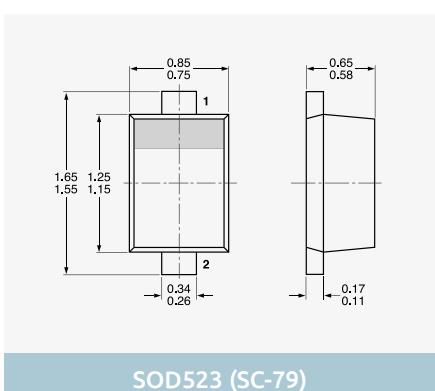


SOD523 (SC-79)

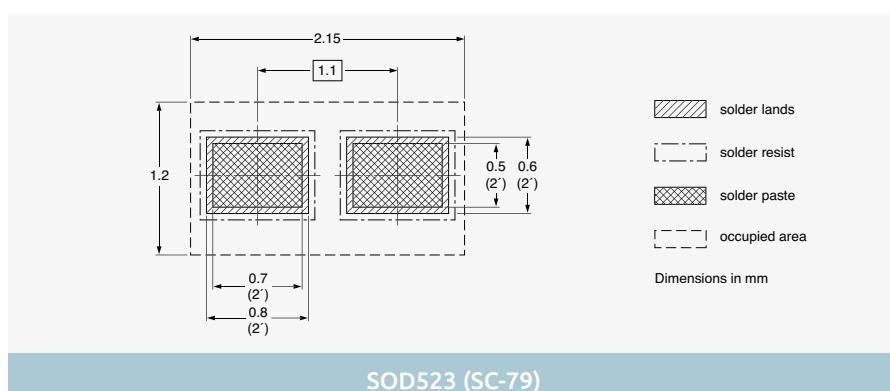


SOD523 (SC-79)

3-pin SMD packages

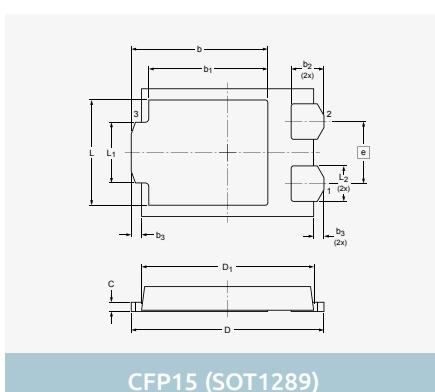

CFP15 (SOT1289)

Dimensions in mm








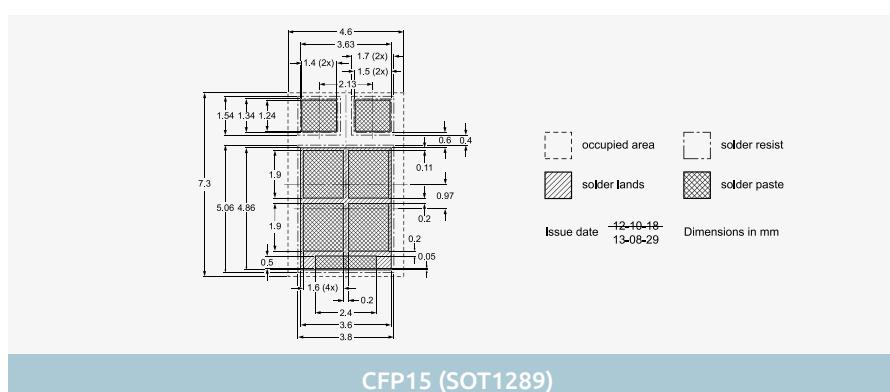


CFP15 (SOT1289)

Issue date 12-10-18
13-08-29 Dimensions in mm


Minimized outline drawings and reflow soldering footprint

3-pin SMD packages

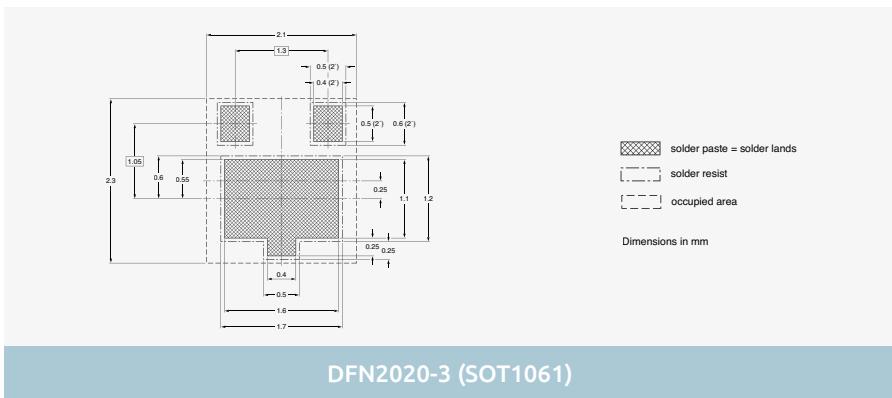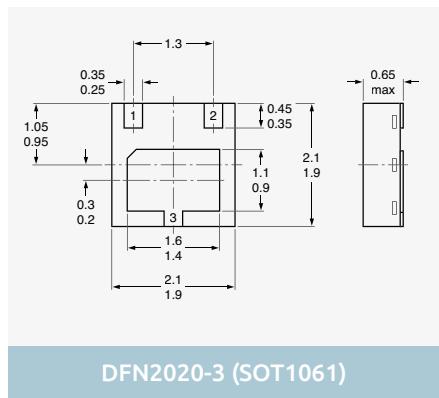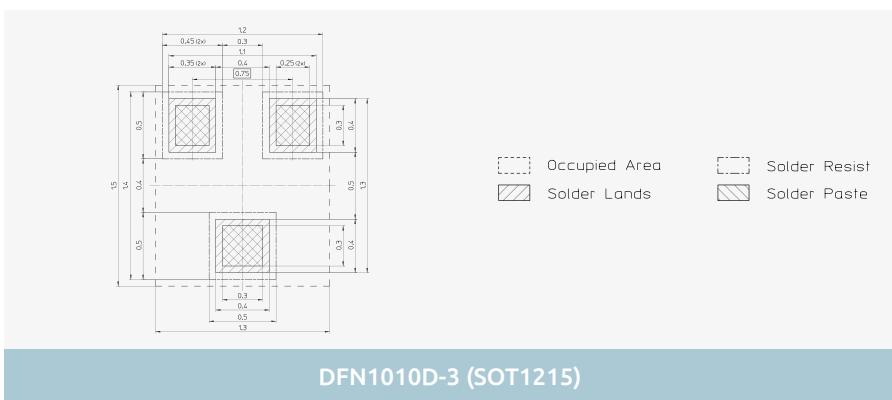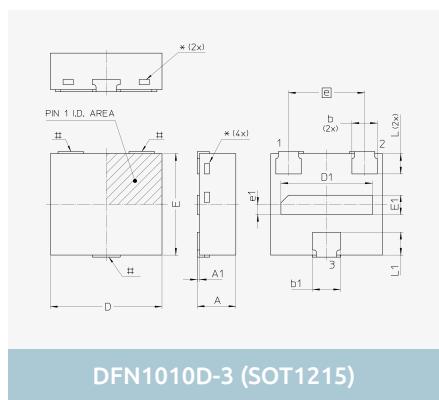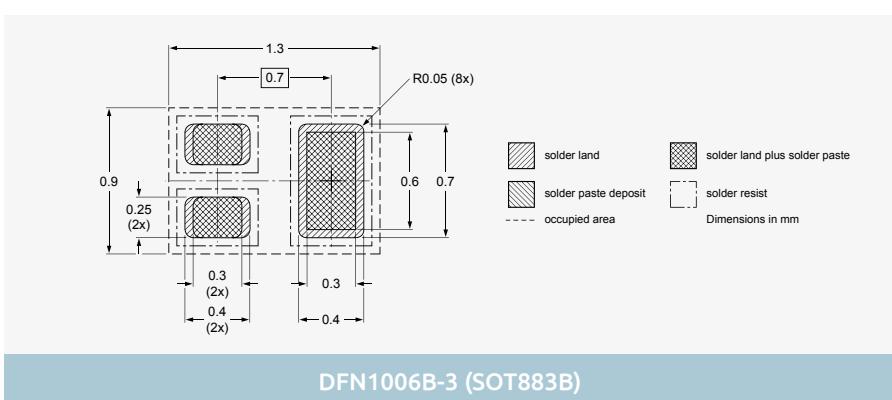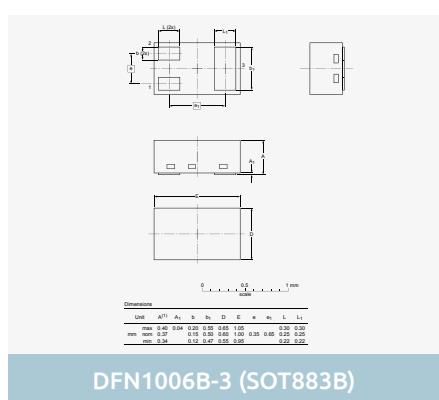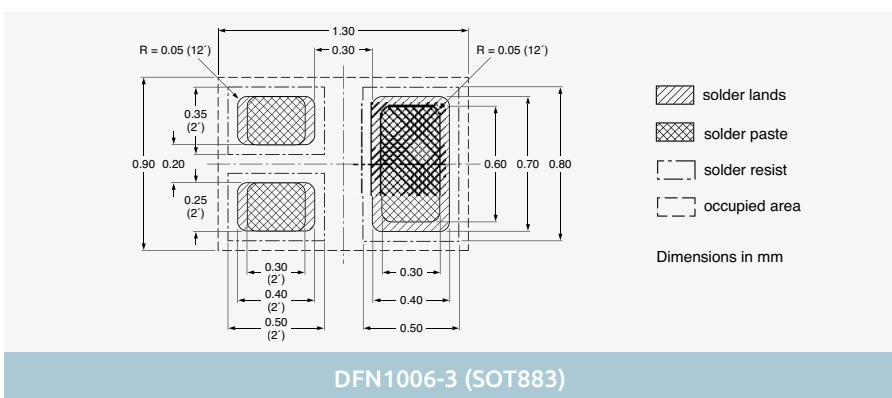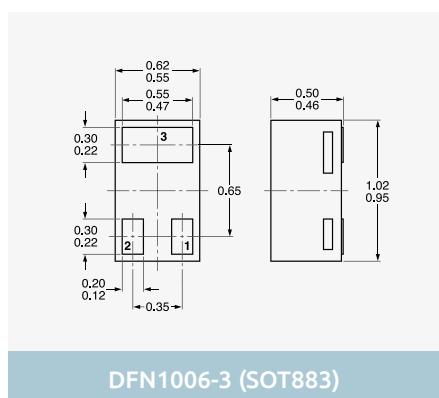


Dimensions in mm


3-pin SMD packages

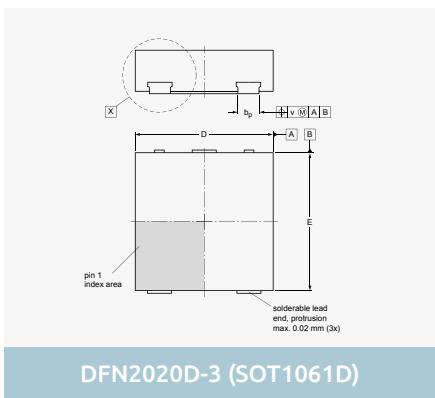


DFN2020D-3 (SOT1061D)

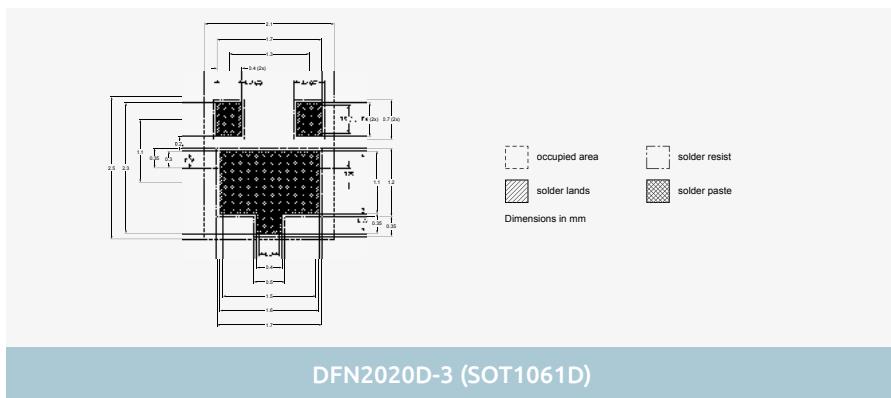


DFN2020D-3 (SOT1061D)

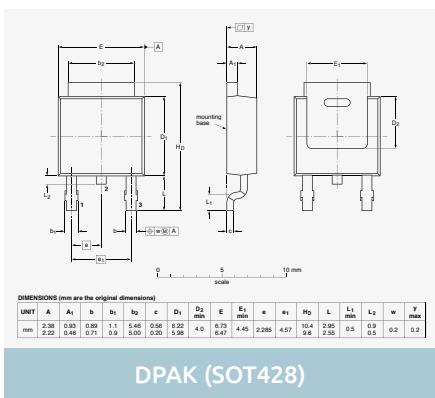


DPAK (SOT428)

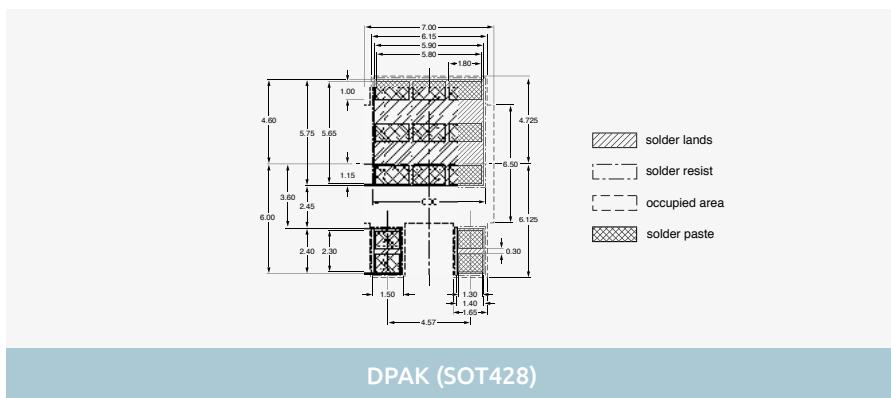


DPAK (SOT428)

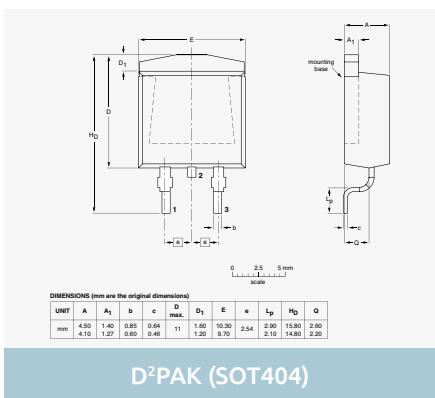

D²PAK (SOT404)

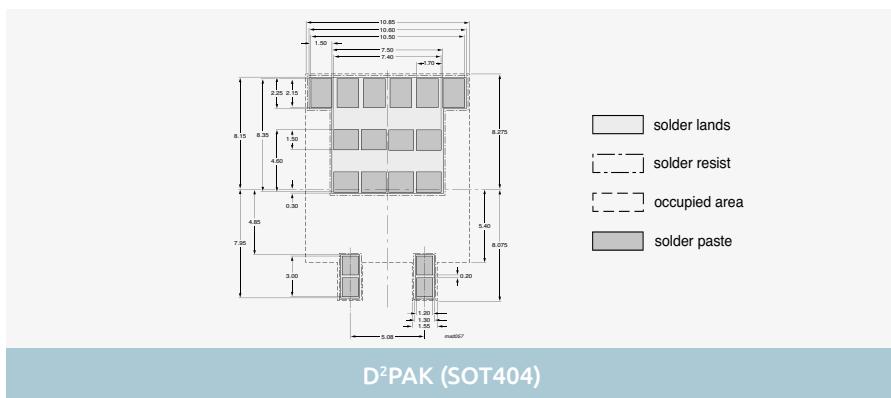


D²PAK (SOT404)

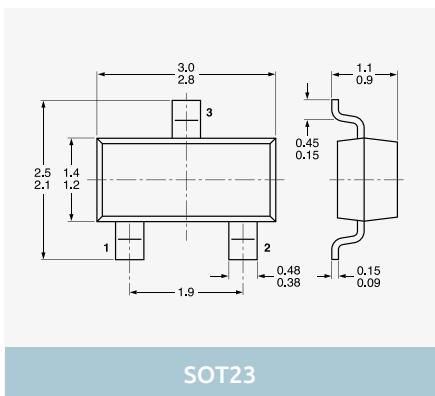

SOT23


Dimensions in mm

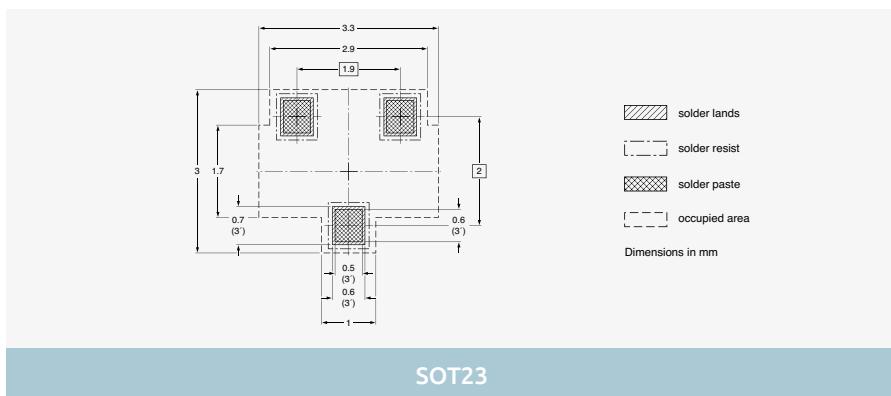


SOT23

Minimized outline drawings and reflow soldering footprint


3-pin SMD packages

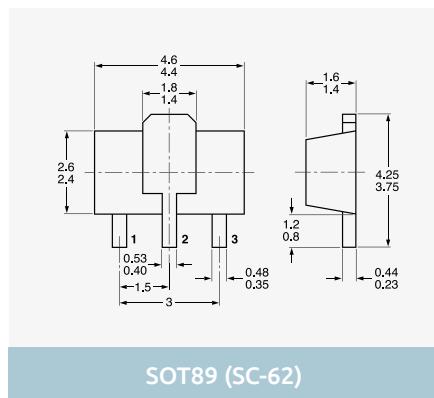


SOT89 (SC-62)

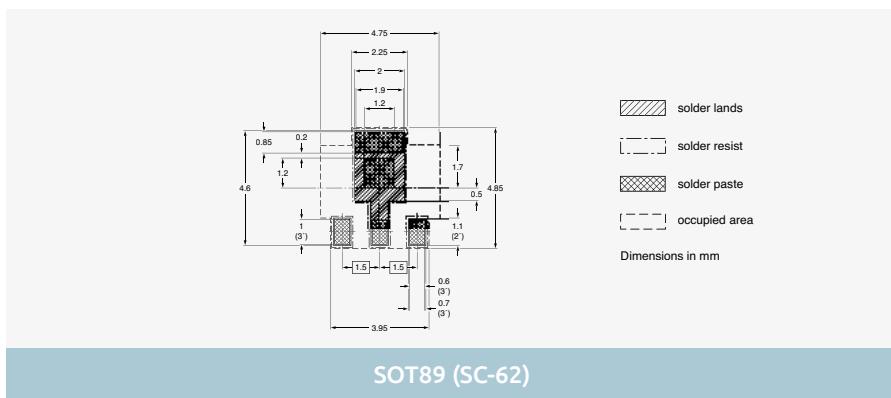


SOT89 (SC-62)

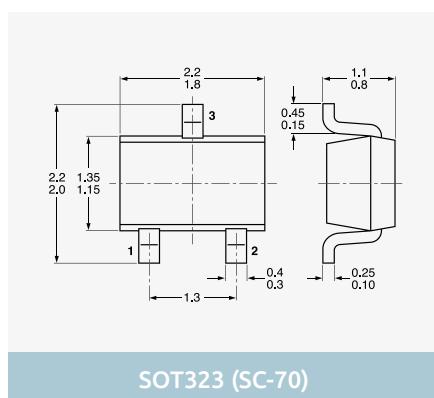


SOT323 (SC-70)

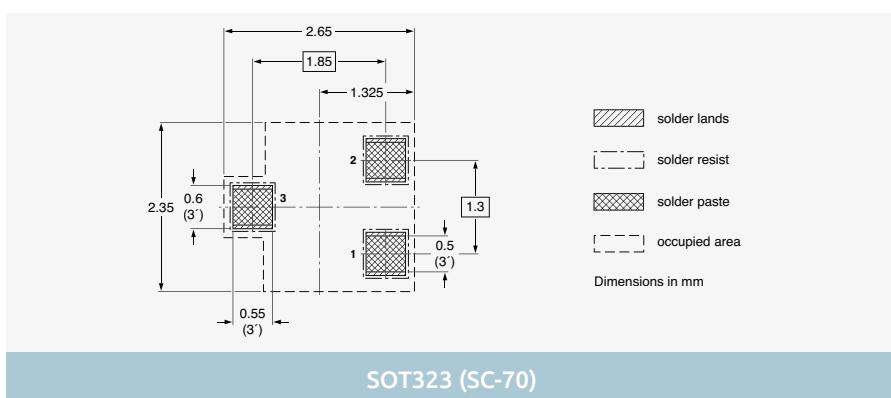

SOT323 (SC-70)

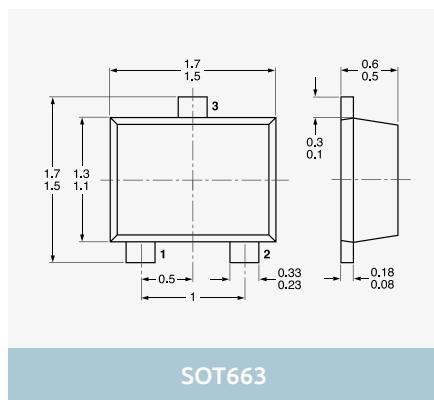


SOT663

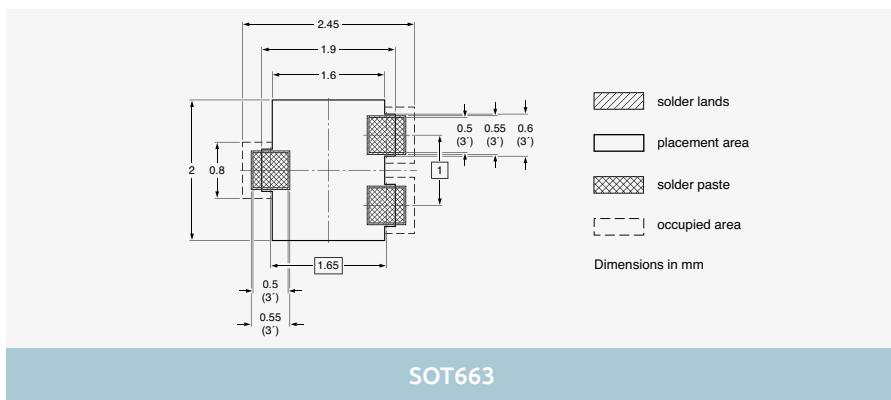


SOT663

4-pin SMD packages

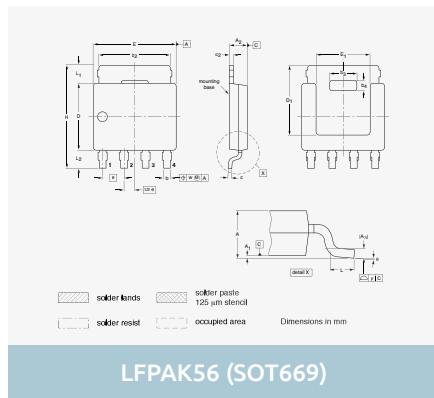


LFPAK56 (SOT669)

Dimensions in mm

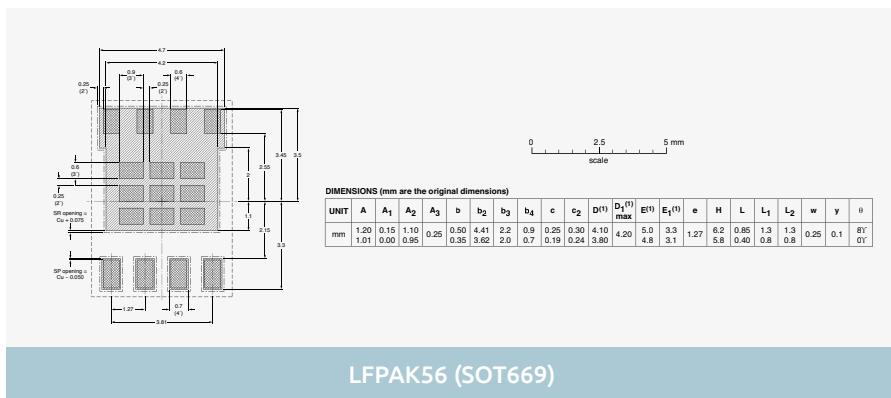


LFPAK56 (SOT669)


4-pin SMD packages

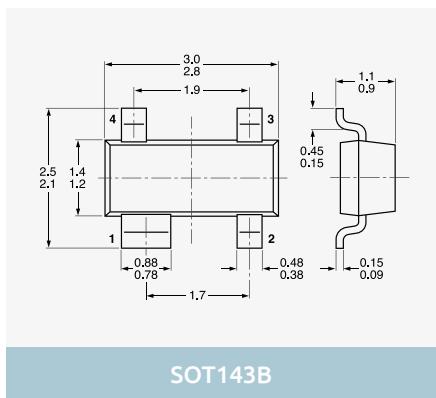


SOT143B

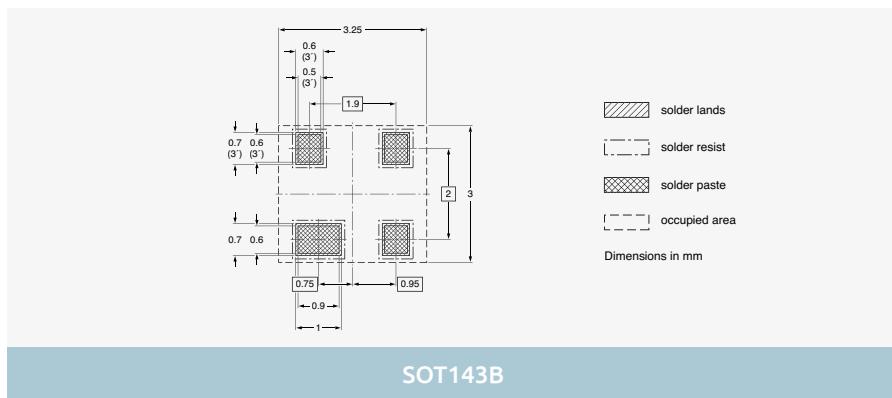

SOT143B

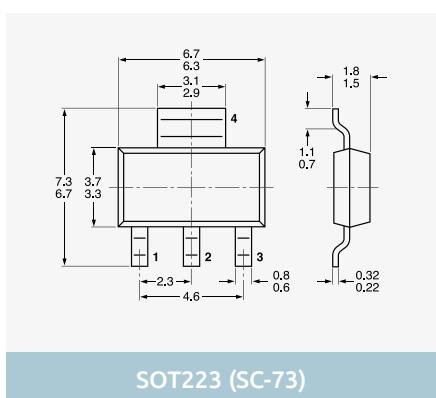


SOT223 (SC-73)

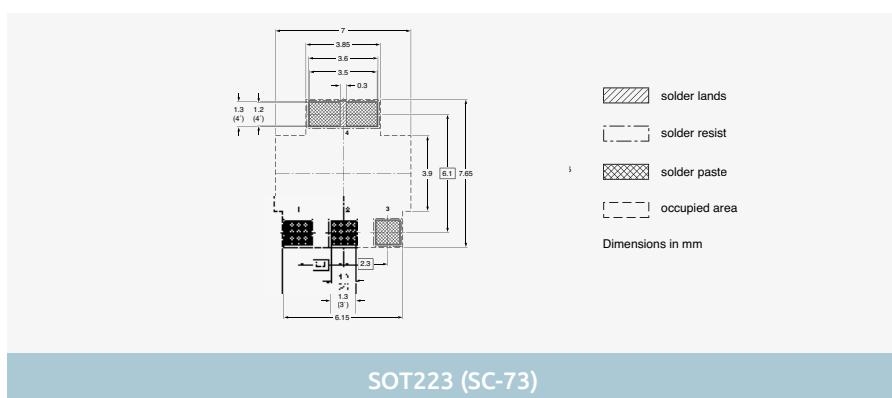


SOT223 (SC-73)


5-pin SMD packages

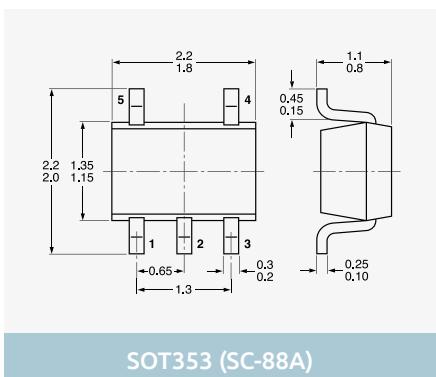


SOT353 (SC-88A)

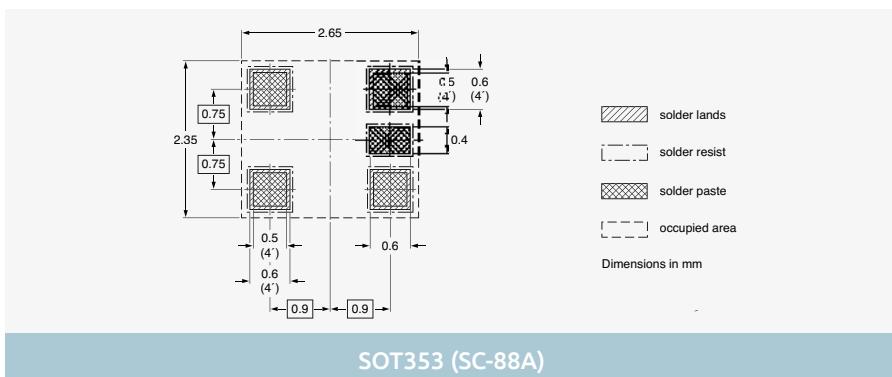

SOT353 (SC-88A)

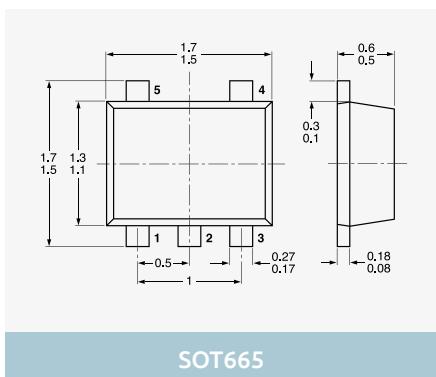

SOT665

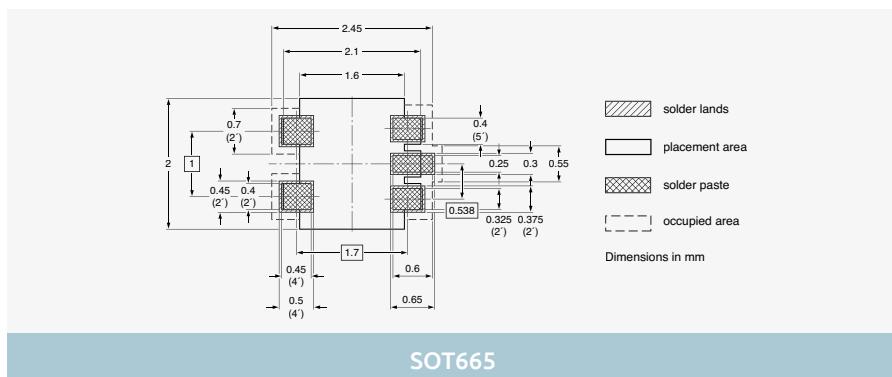


SOT665


Dimensions in mm

Minimized outline drawings and reflow soldering footprint


5-pin SMD packages

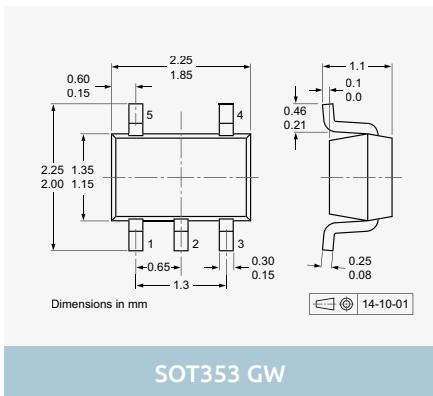


SOT353 GW

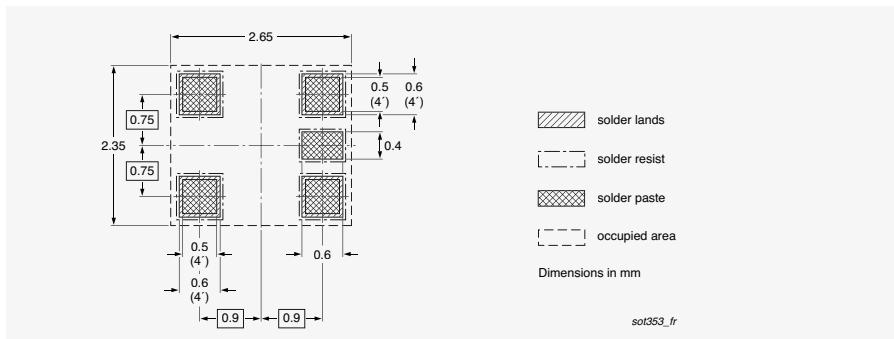

SOT353 GW


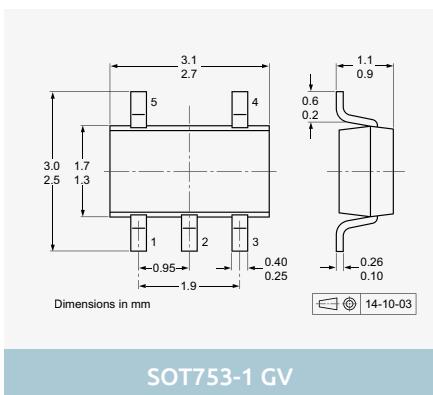


SOT753-1 GV


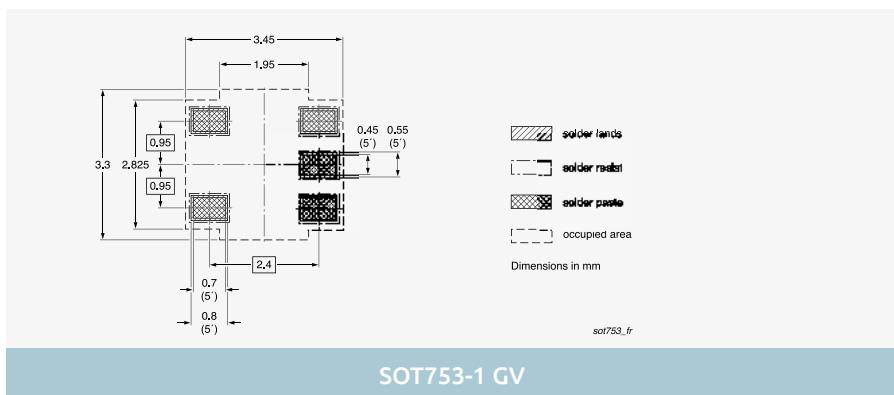


SOT753-1 GV

6-pin SMD packages

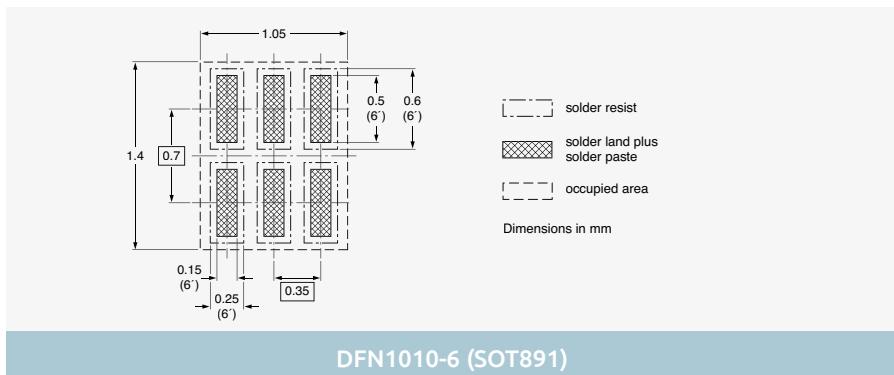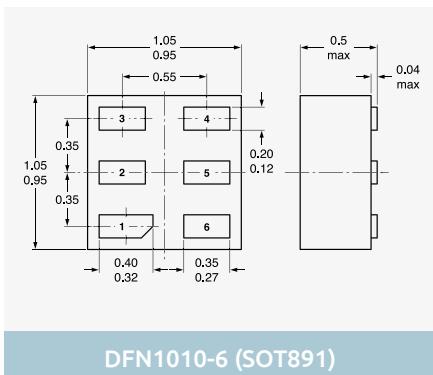


DFN1010-6 (SOT891)

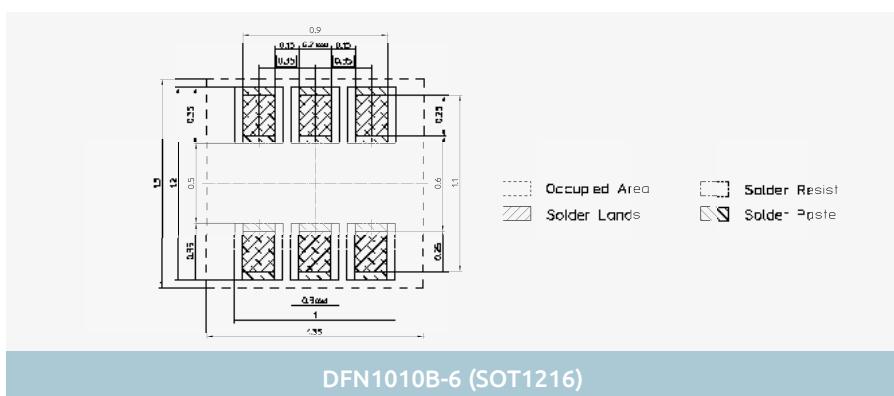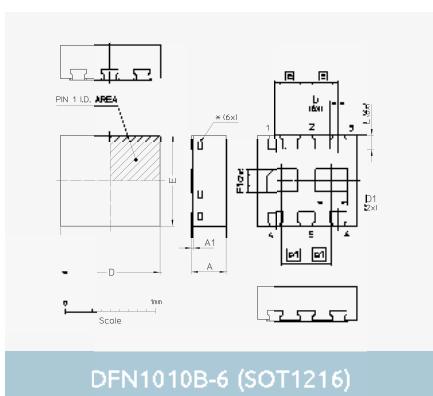


DFN1010B-6 (SOT1216)


6-pin SMD packages

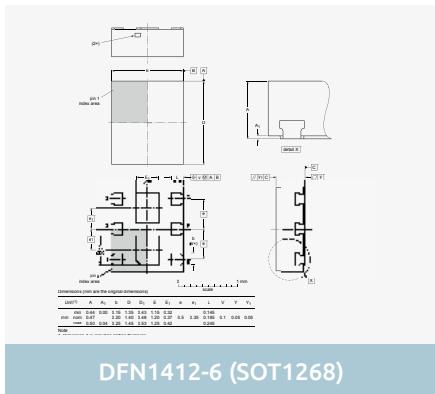


DFN1412-6 (SOT1268)

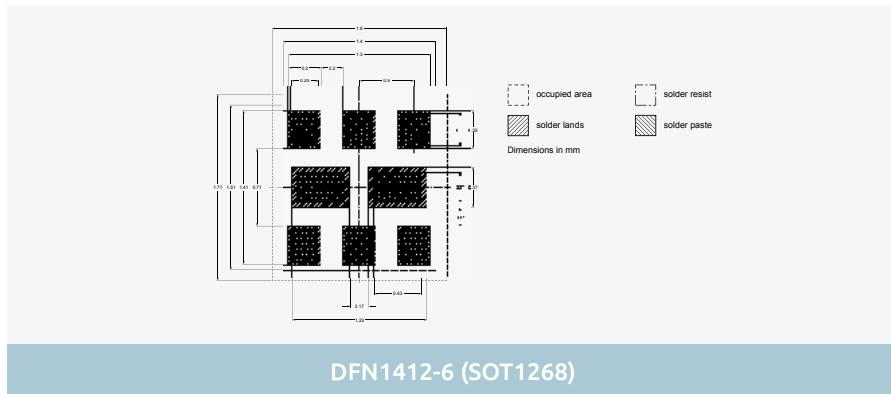


DFN1412-6 (SOT1268)

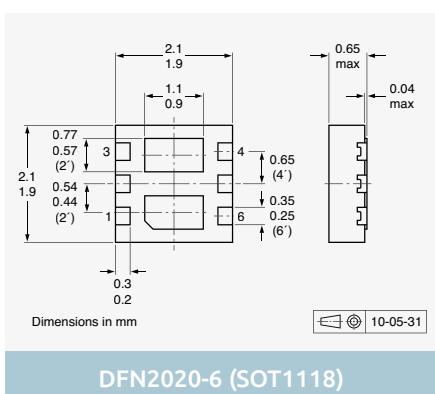


DFN2020-6 (SOT1118)

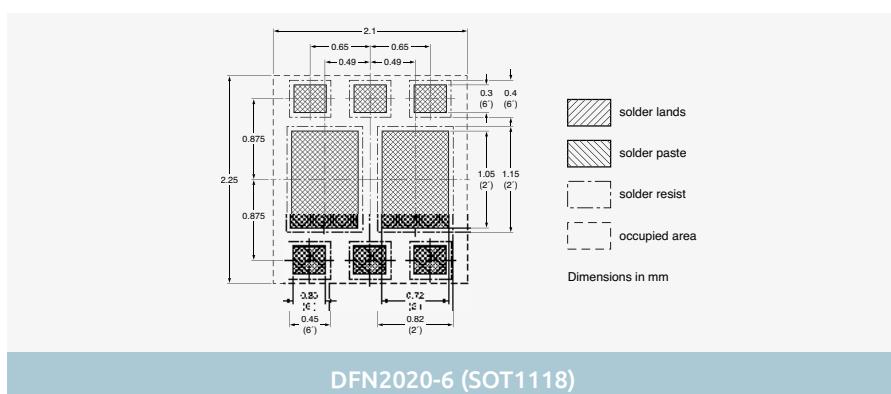


DFN2020-6 (SOT1118)

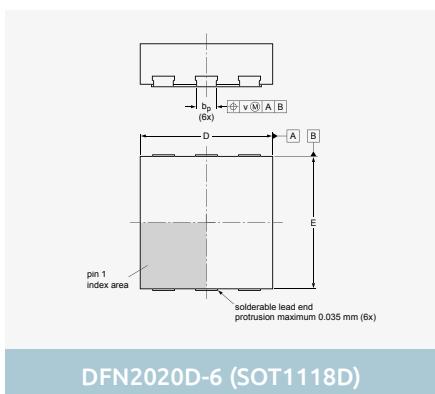

DFN2020D-6 (SOT1118D)

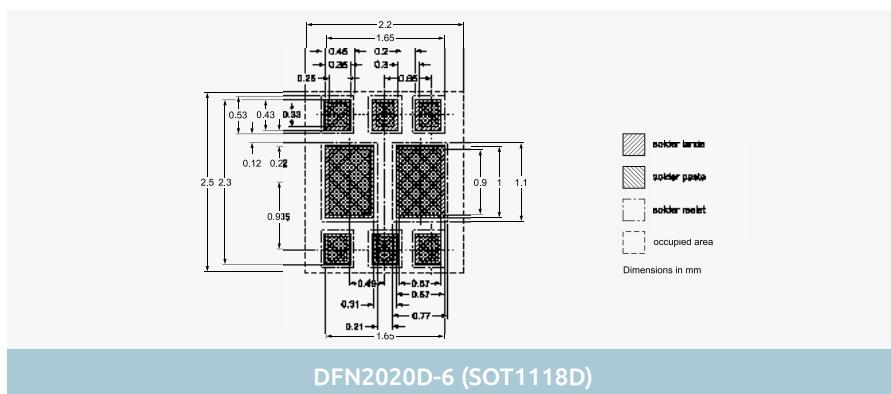


DFN2020D-6 (SOT1118D)

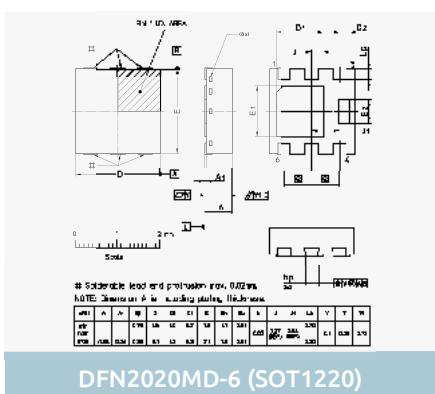

DFN2020MD-6 (SOT1220)


Dimensions in mm

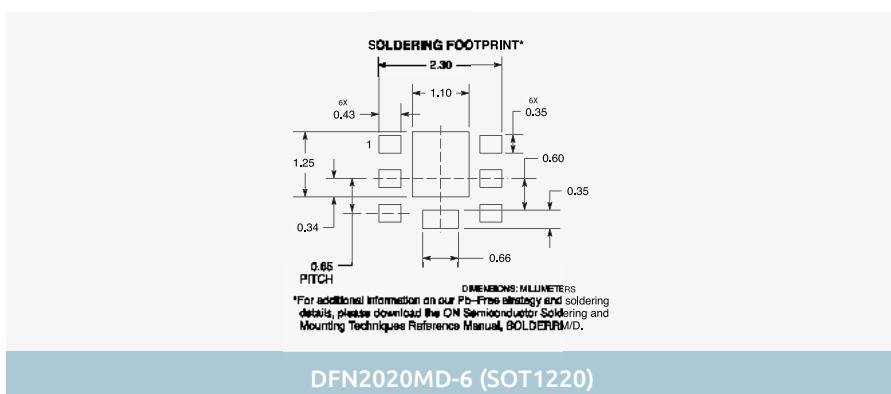


DFN2020MD-6 (SOT1220)

Minimized outline drawings and reflow soldering footprint


6-pin SMD packages

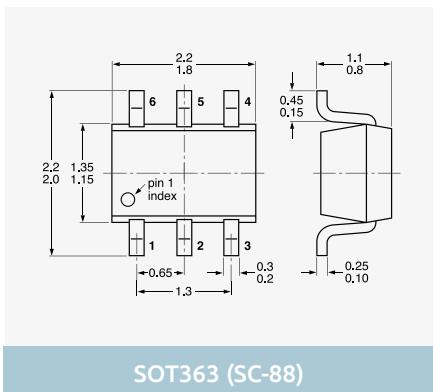


SOT363 (SC-88)

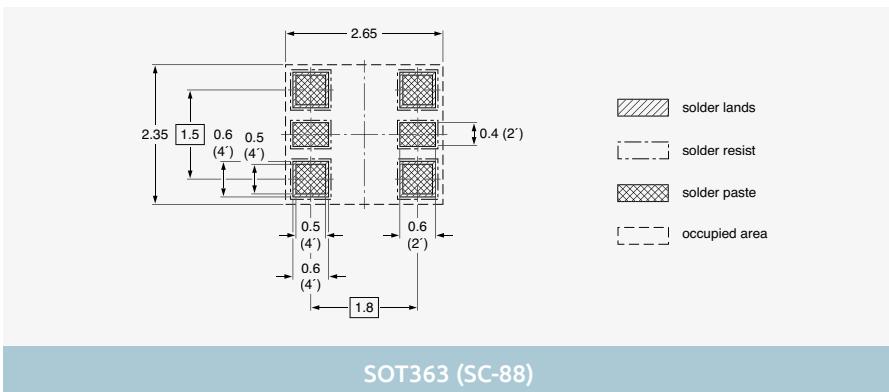


SOT363 (SC-88)

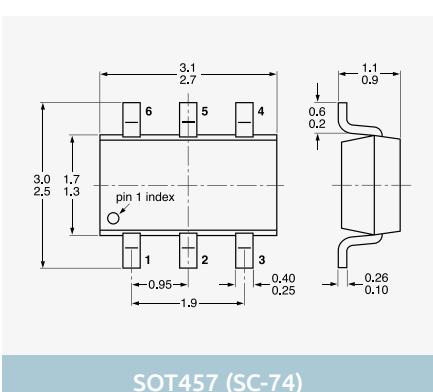


SOT457 (SC-74)

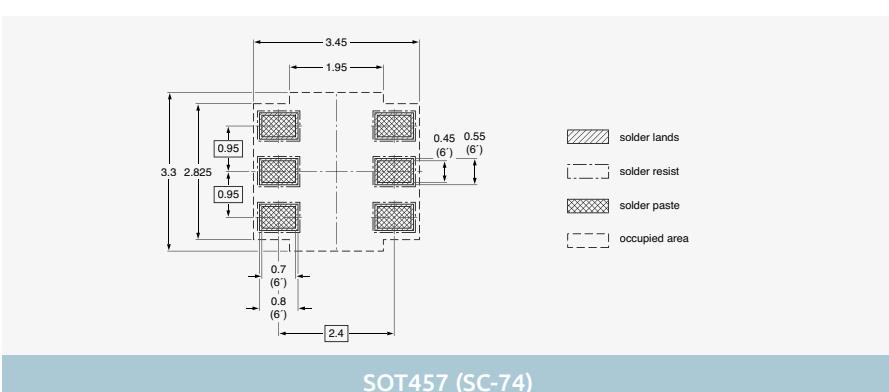


SOT457 (SC-74)

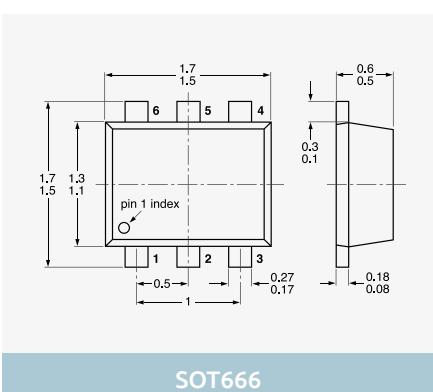


SOT666

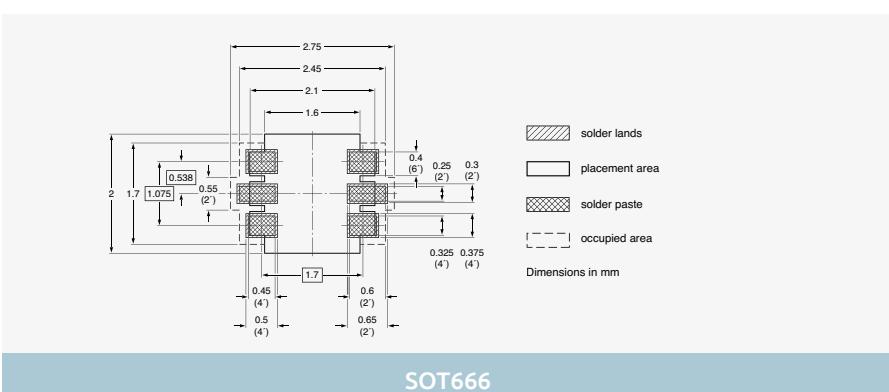

SOT666

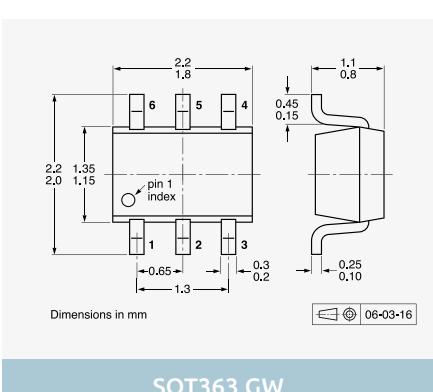


SOT363 GW

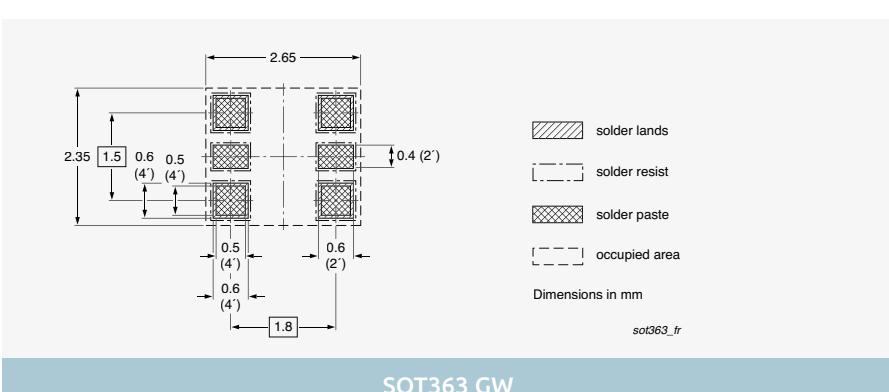


SOT363 GW

Dimensions in mm


6-pin SMD packages

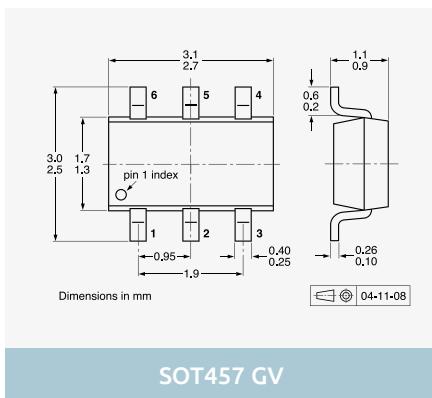


SOT457 GV

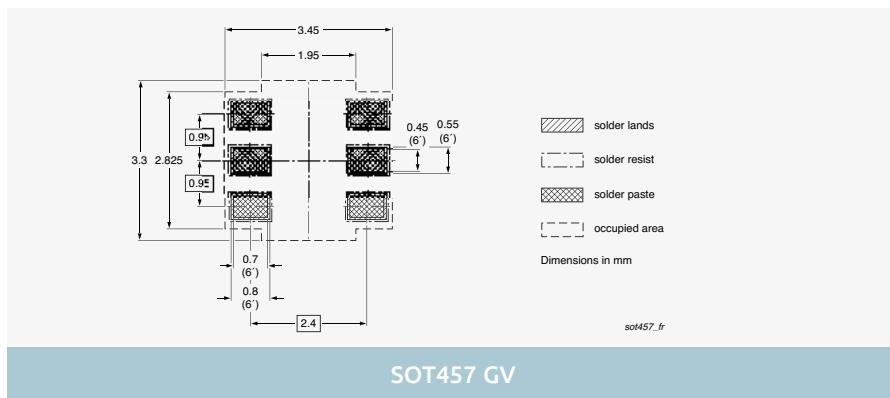


SOT457 GV

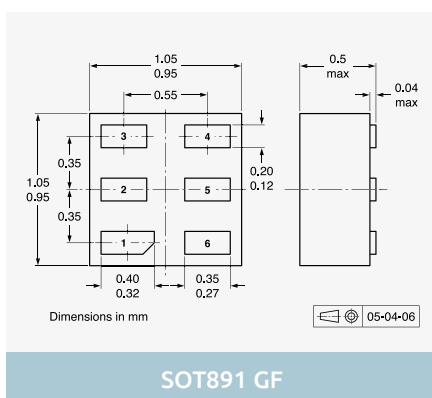


SOT891 GF

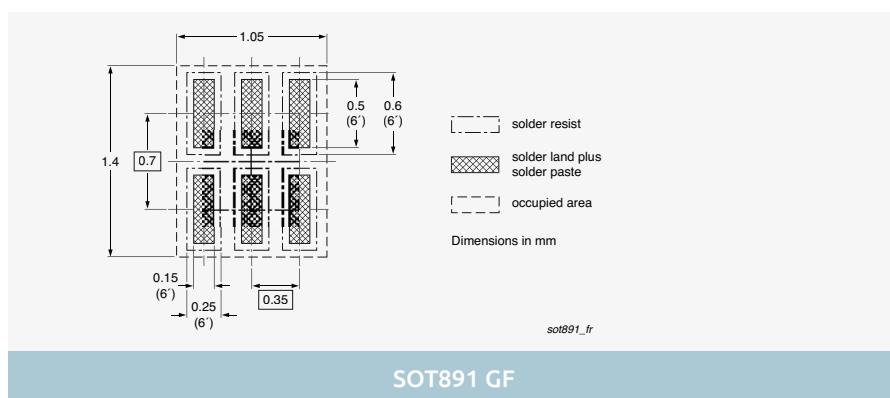

SOT891 GF

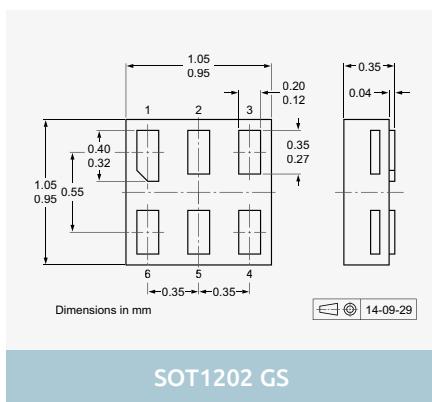


SOT1202 GS

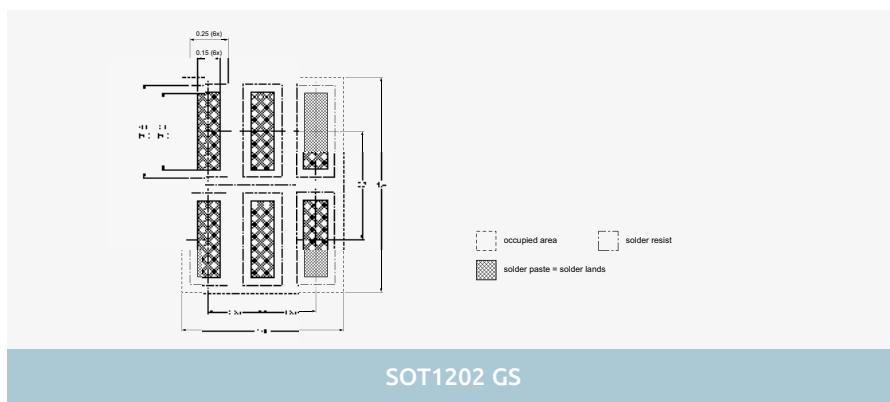


SOT1202 GS

7-pin SMD packages

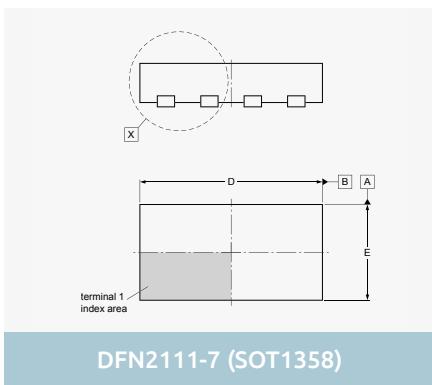


DFN2111-7 (SOT1358)

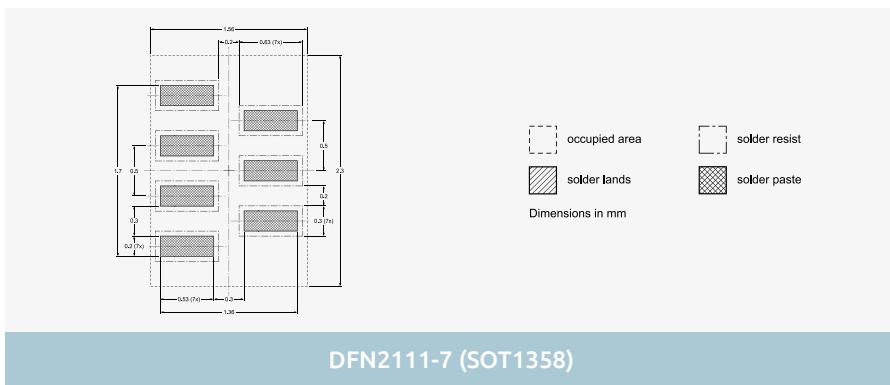


DFN2111-7 (SOT1358)

Minimized outline drawings and reflow soldering footprint

7-pin SMD packages

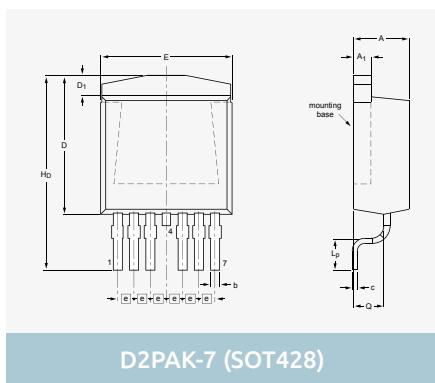


D2PAK-7 (SOT428)

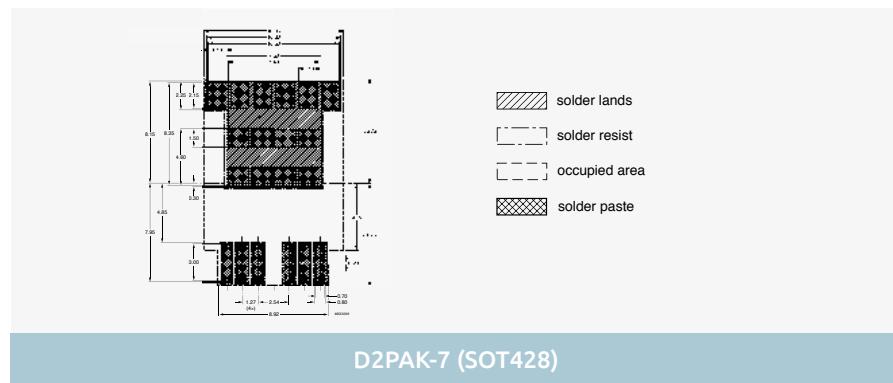


D2PAK-7 (SOT428)


8-pin SMD packages

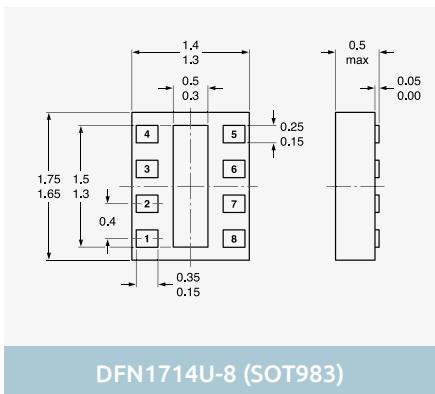


DFN1714U-8 (SOT983)

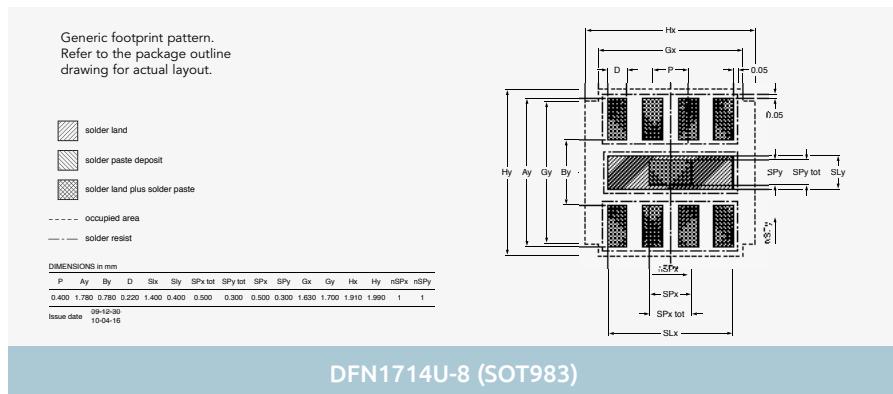


DFN1714U-8 (SOT983)

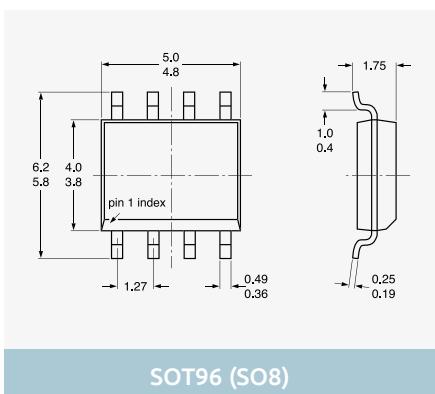


SOT96 (SO8)

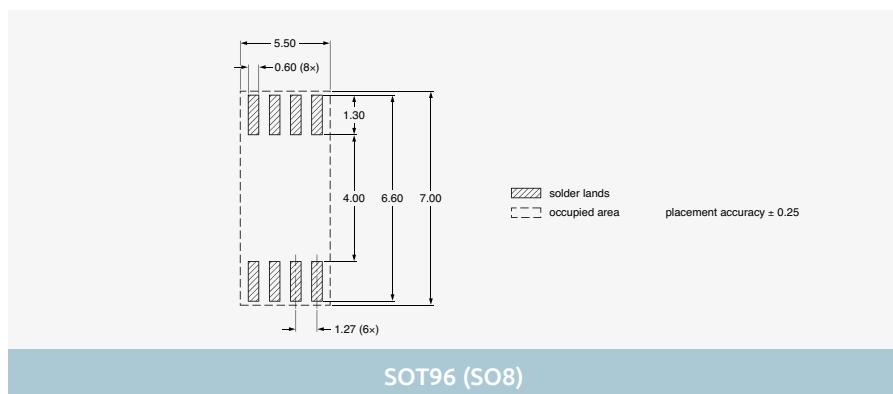

SOT96 (SO8)

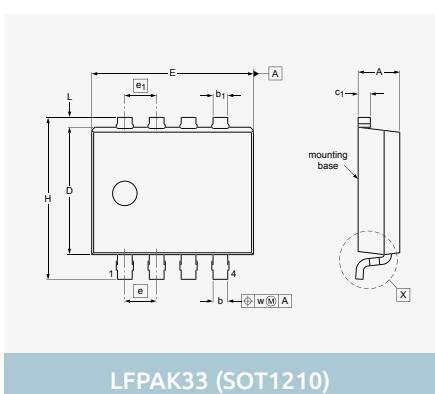


LFPAK33 (SOT1210)

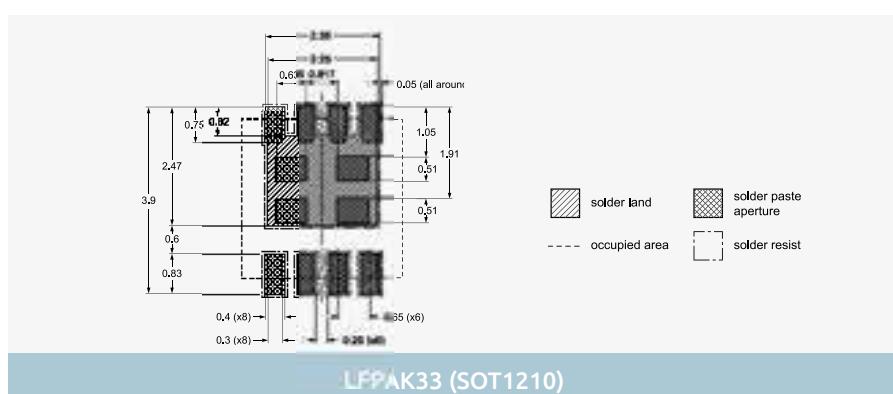


LFPAK33 (SOT1210)

Dimensions in mm


8-pin SMD packages

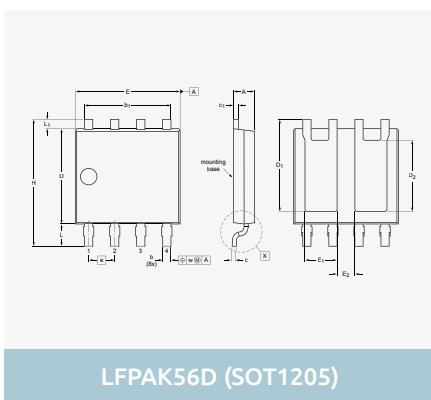


LFPAK56D (SOT1205)

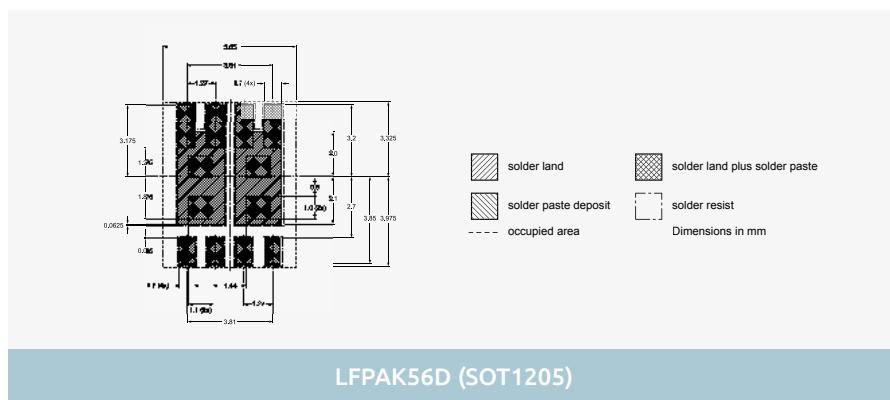


LFPAK56D (SOT1205)

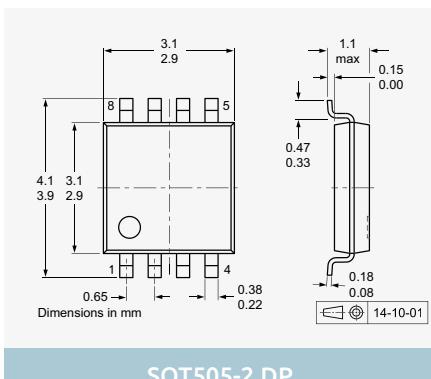


SOT505-2 DP

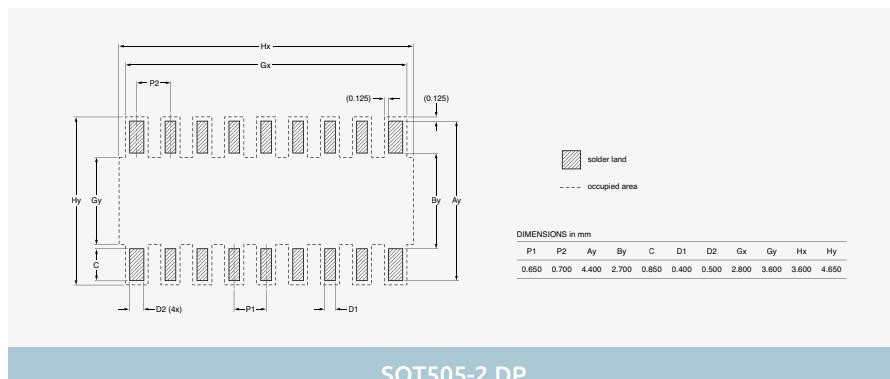


SOT505-2 DP

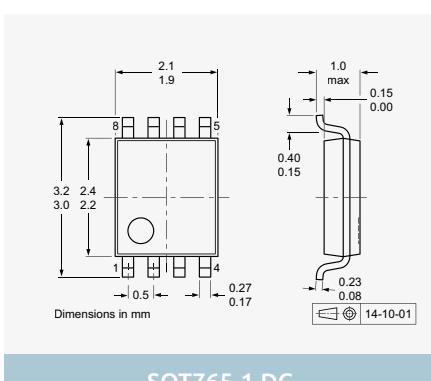

SOT765-1 DC

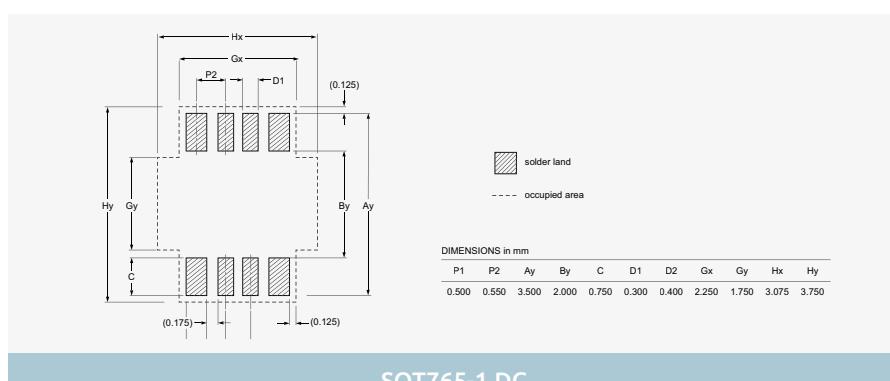


SOT765-1 DC

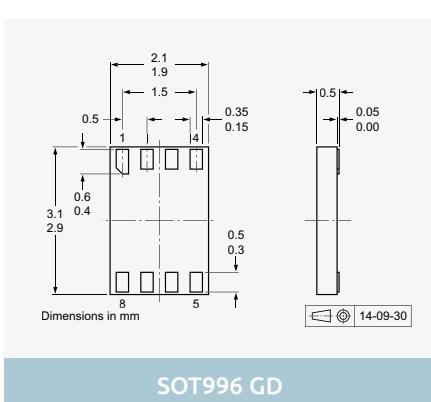

SOT996 GD


Dimensions in mm

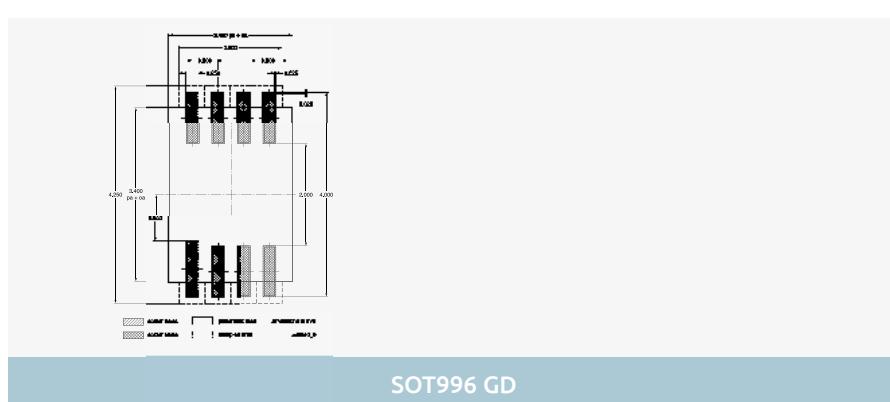


SOT996 GD

Minimized outline drawings and reflow soldering footprint


More than 8-pin SMD packages

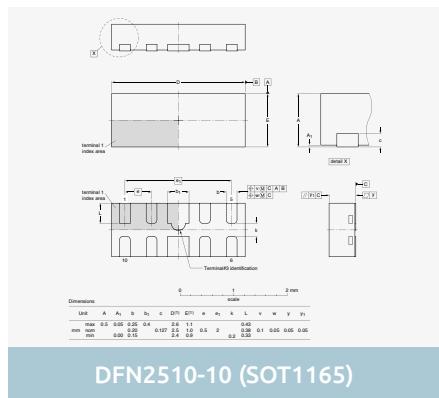


DFN2510-10 (SOT1165)

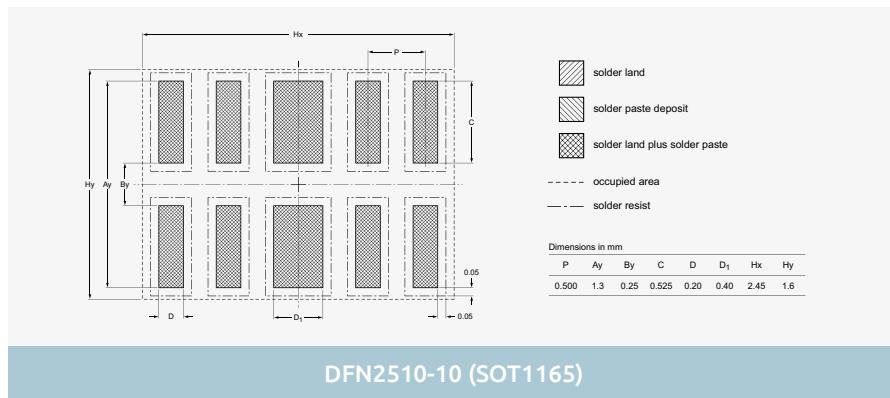


DFN2510-10 (SOT1165)

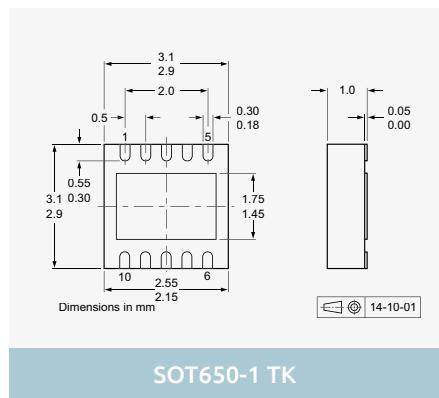


SOT650-1 TK

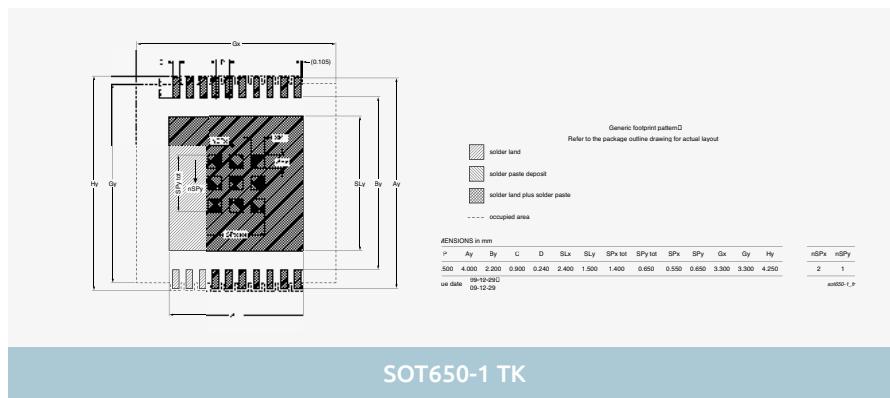


SOT650-1 TK

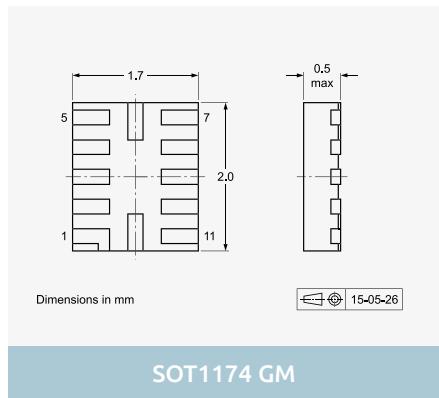


SOT1174 GM

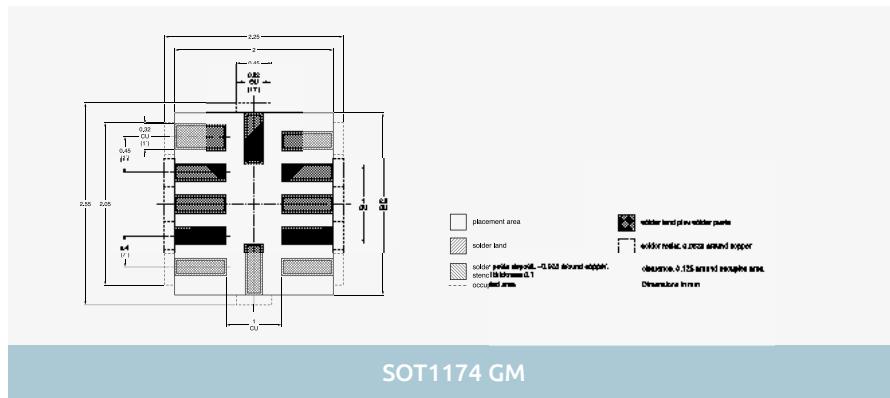

SOT1174 GM

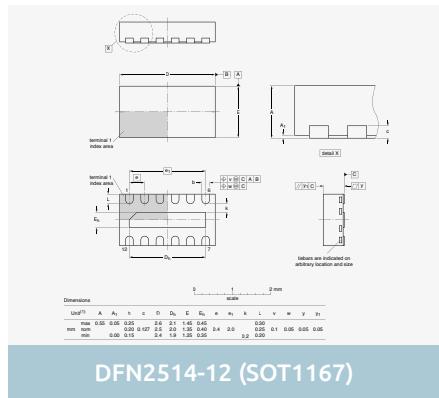


DFN2514-12 (SOT1167)

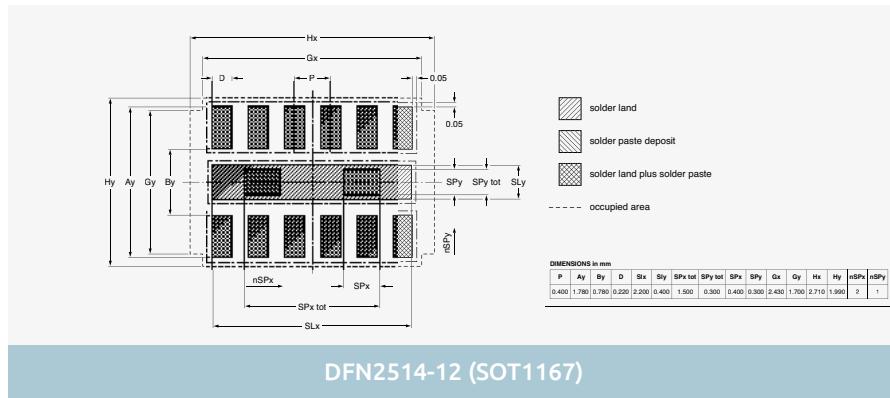


DFN2514-12 (SOT1167)

Dimensions in mm


More than 8-pin SMD packages

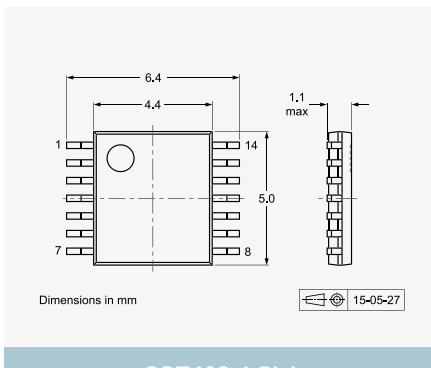


SOT402-1 PW

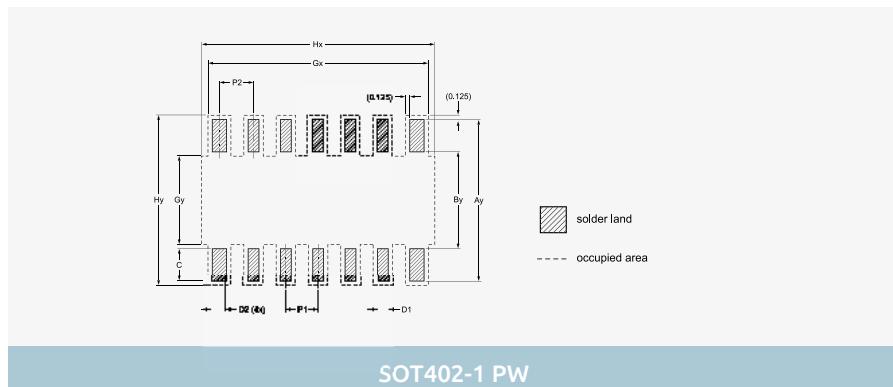


SOT402-1 PW

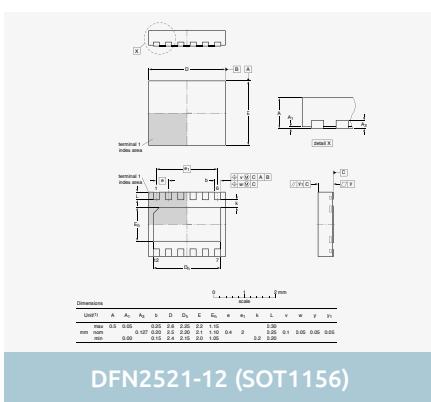


DFN2521-12 (SOT1156)

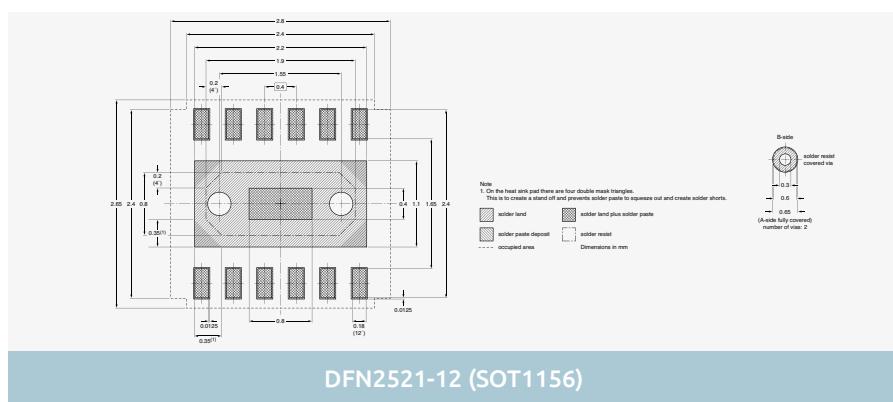


DFN2521-12 (SOT1156)

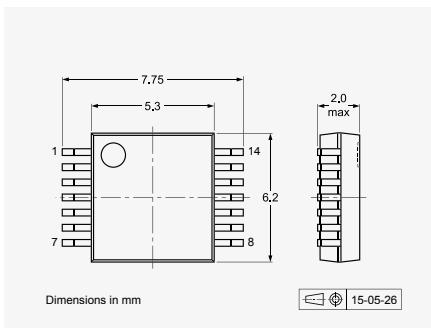


SOT337-1 DB

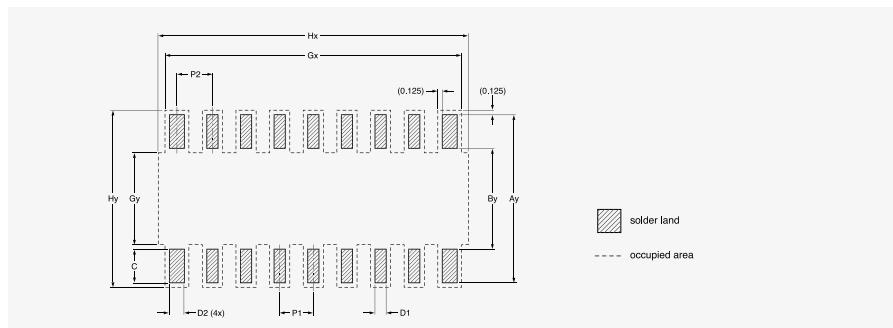

SOT337-1 DB

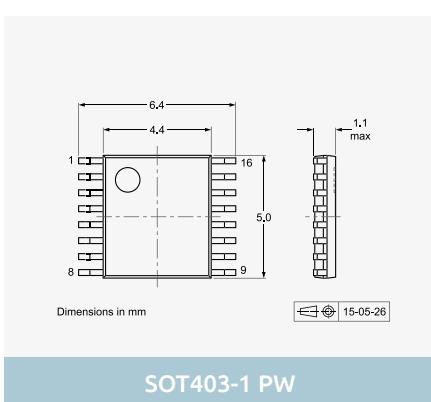



SOT403-1 PW

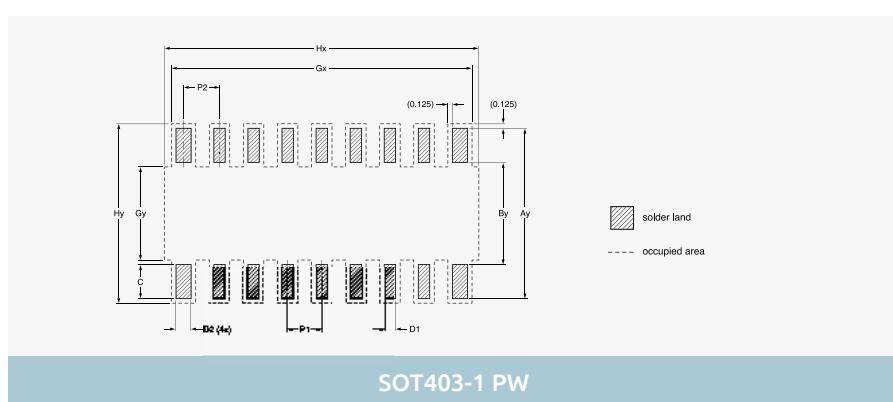



SOT403-1 PW

Minimized outline drawings and reflow soldering footprint



More than 8-pin SMD packages

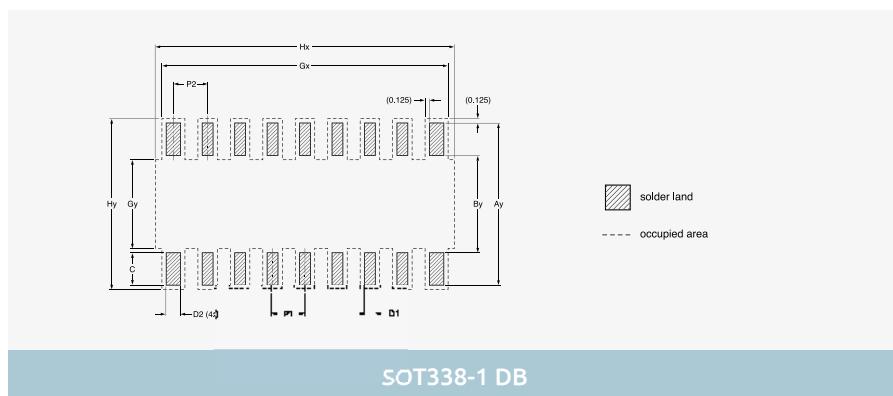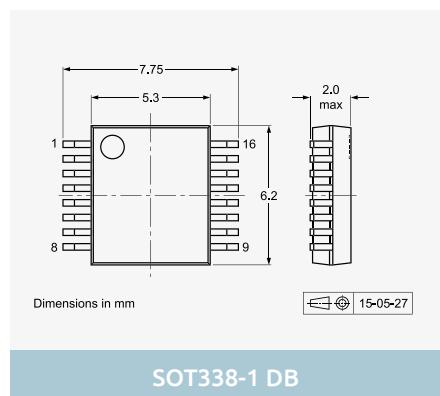



SOT338-1 DB

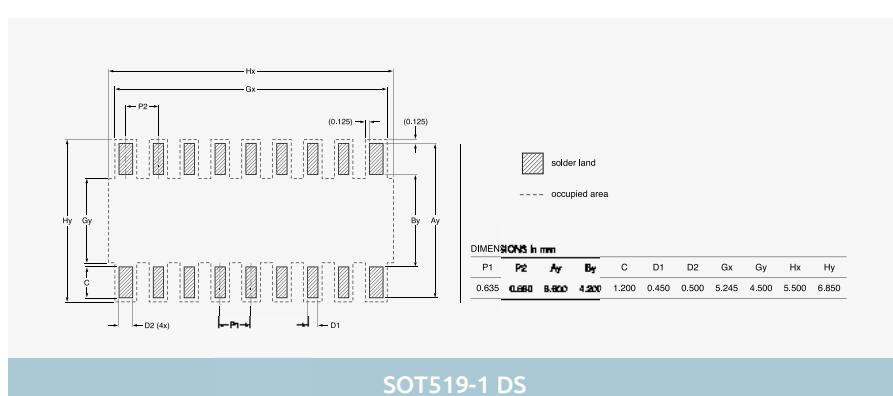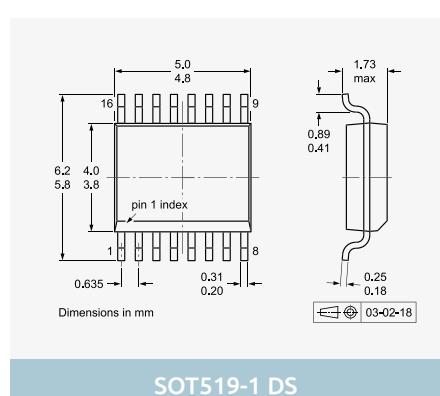

SOT519-1 DS

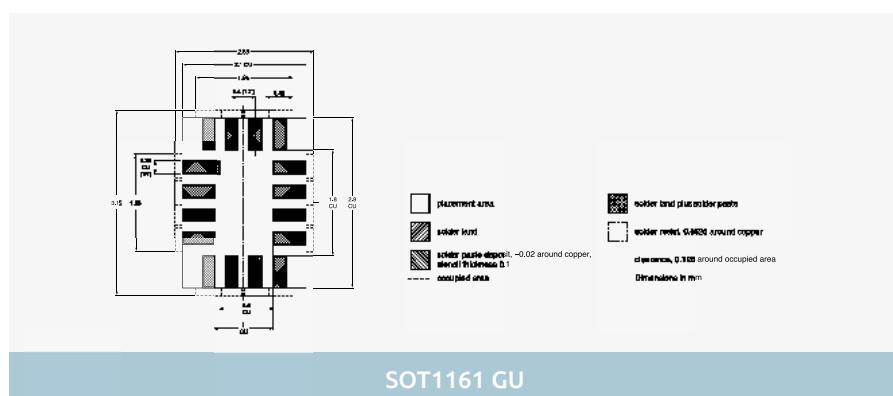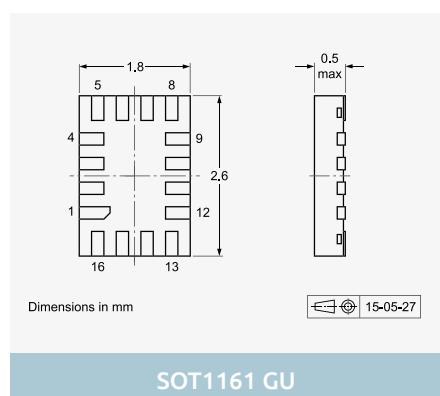


SOT1161 GU

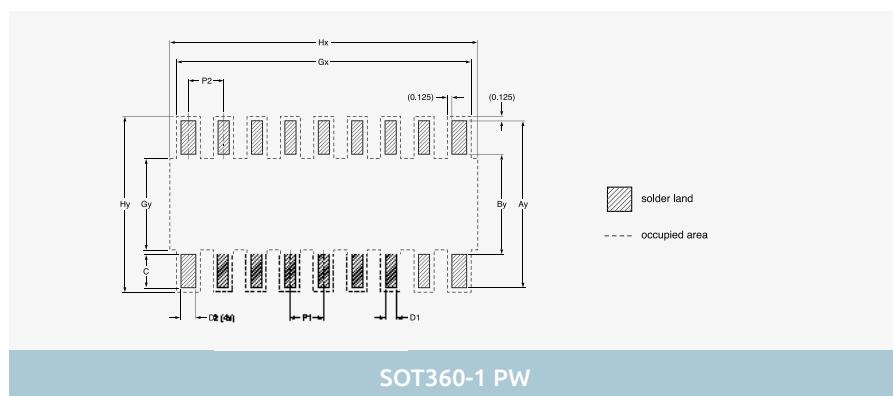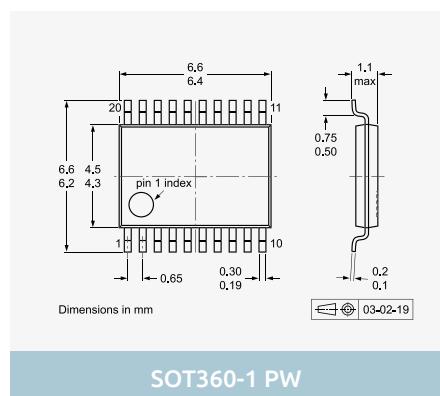


SOT360-1 PW

Dimensions in mm


More than 8-pin SMD packages

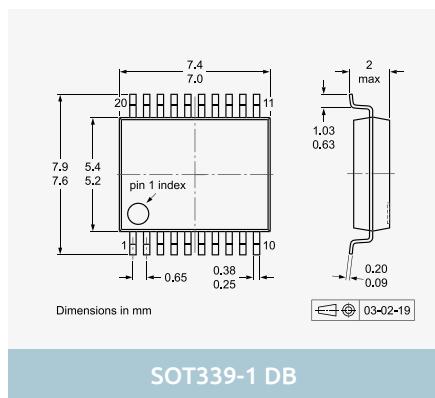


SOT339-1 DB

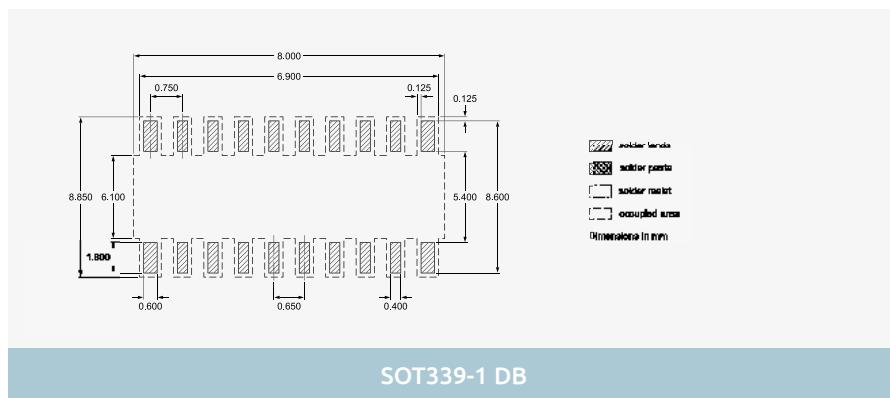


SOT339-1 DB

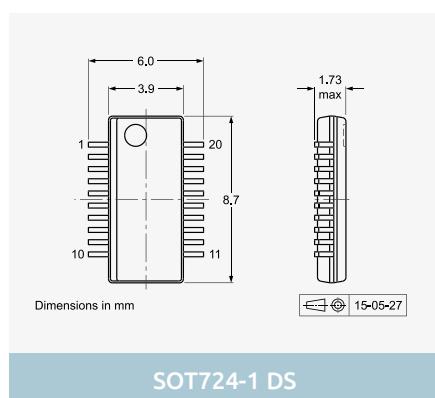


SOT724-1 DS

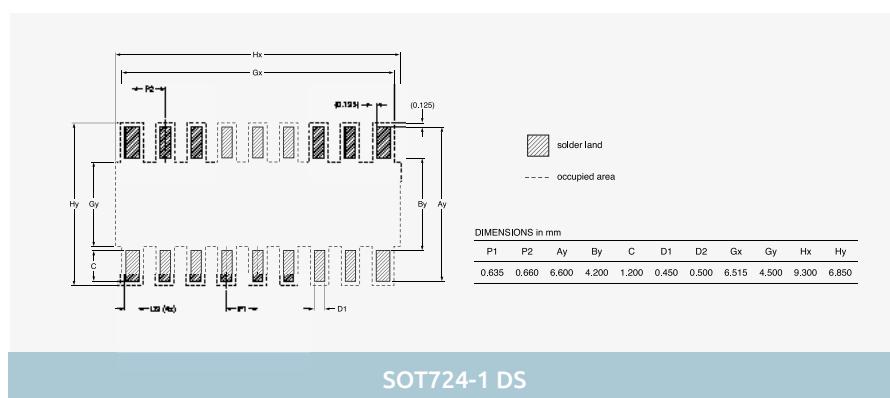


SOT724-1 DS

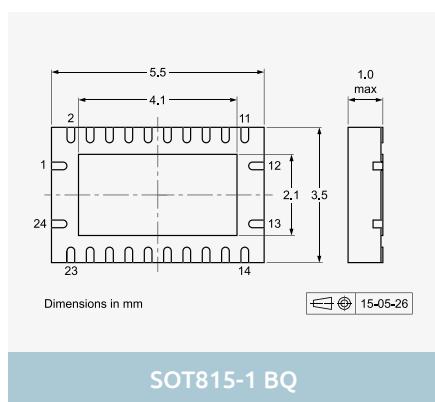


SOT815-1 BQ

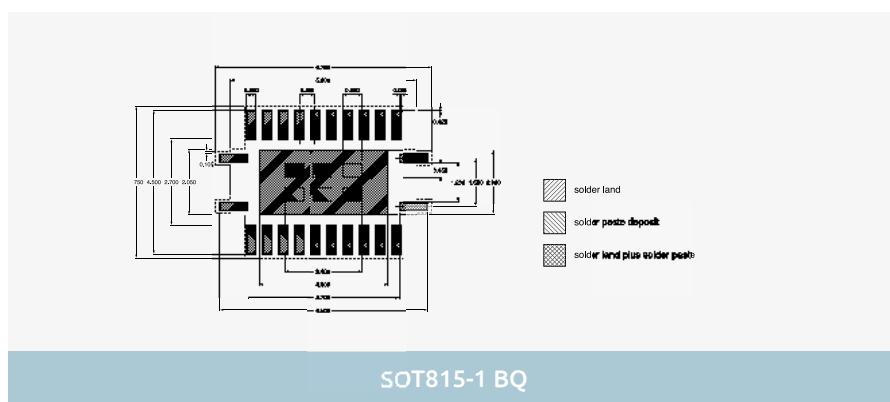

SOT815-1 BQ

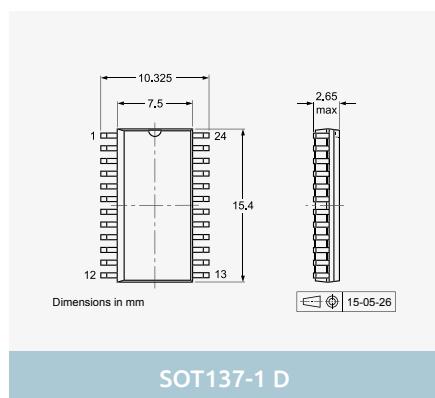



SOT137-1 D

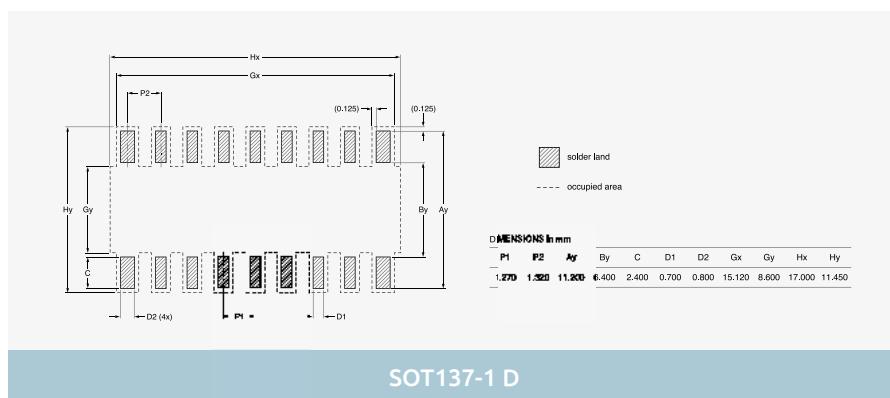



Dimensions in mm

Minimized outline drawings and reflow soldering footprint



More than 8-pin SMD packages

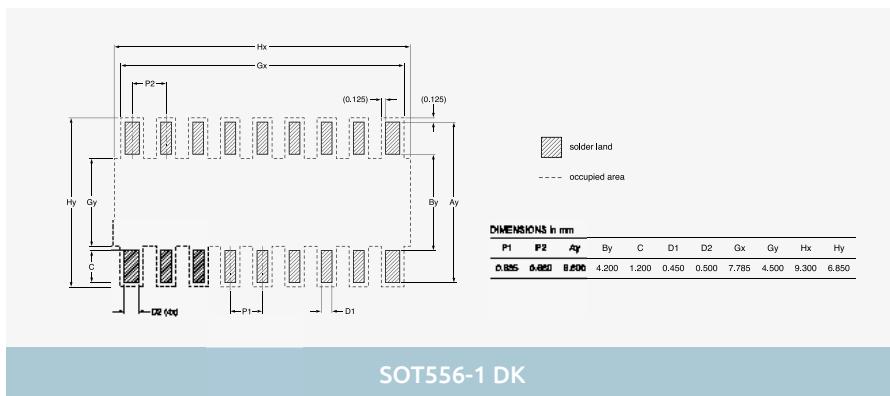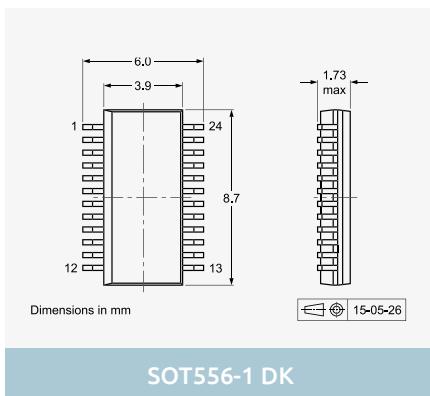



SOT556-1 DK

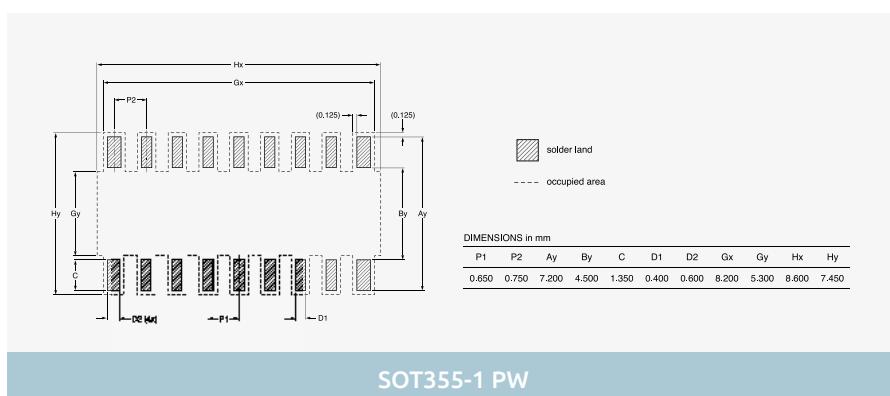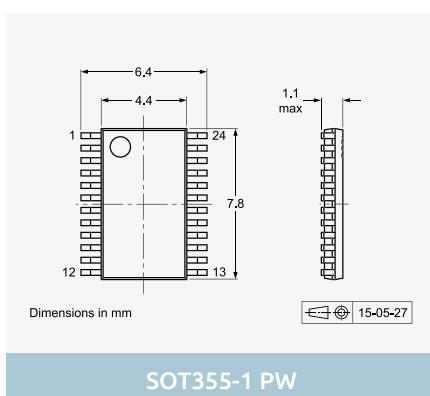

SOT355-1 PW

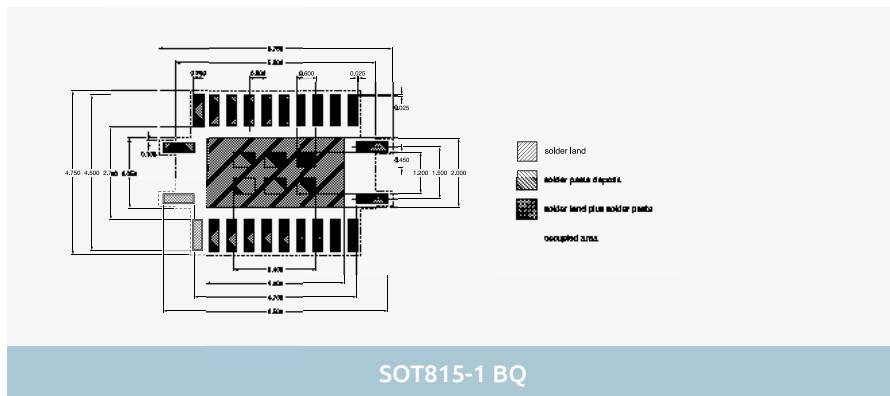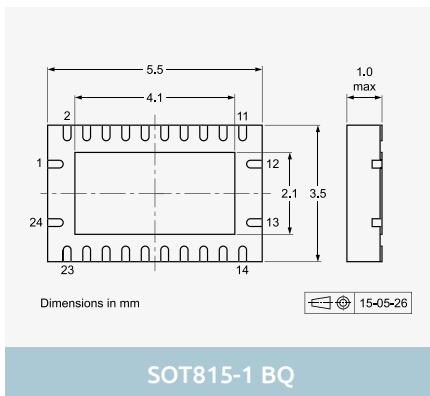



SOT815-1 BQ

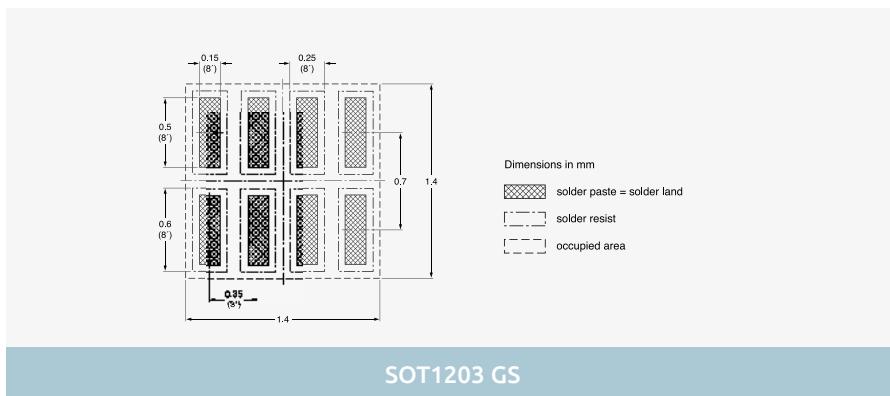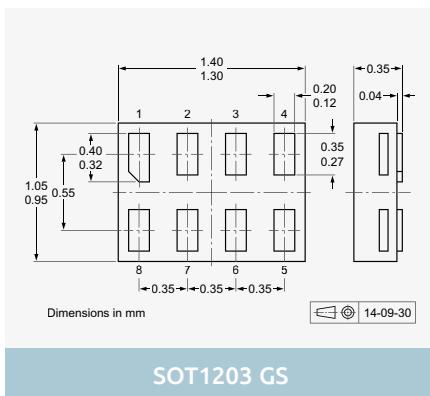


SOT1203 GS

Dimensions in mm

More than 8-pin SMD packages

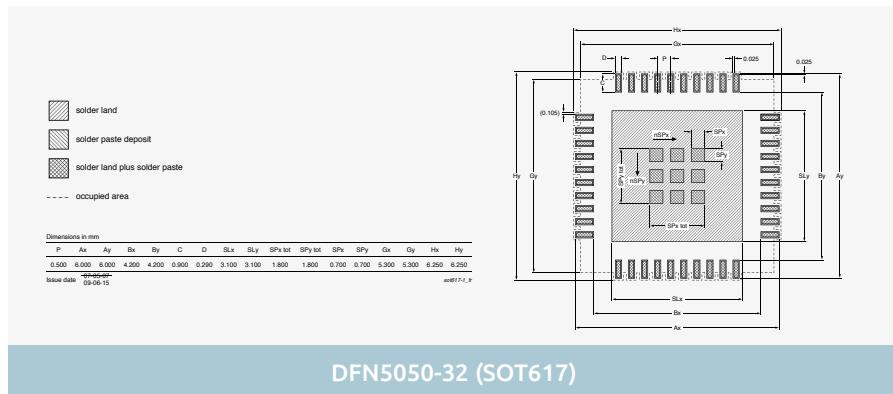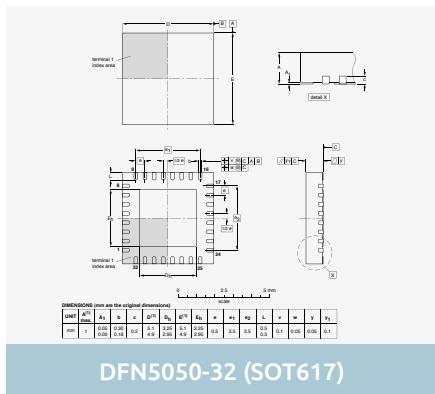

Single-ended and through-hole packages

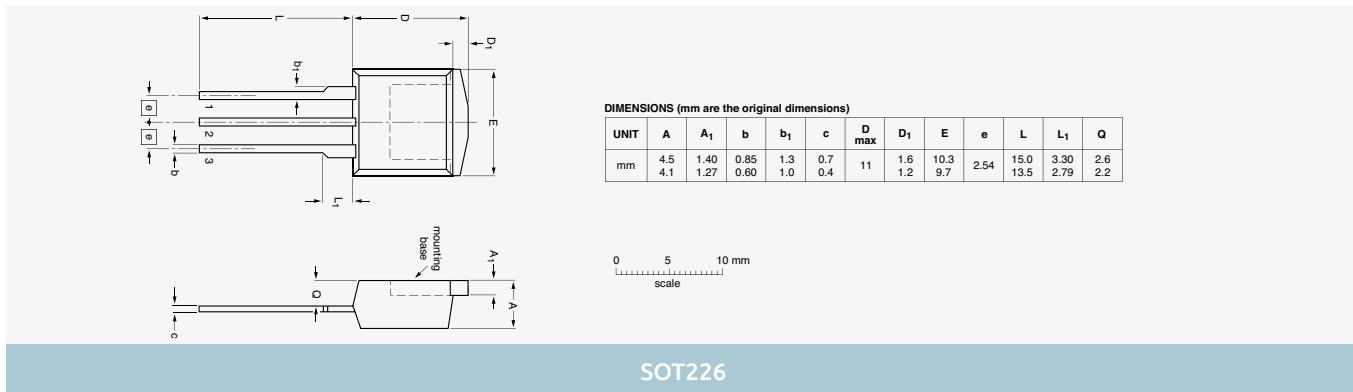



© 2018 Nexperia B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release:

May 2018

Printed:

In the Netherlands