

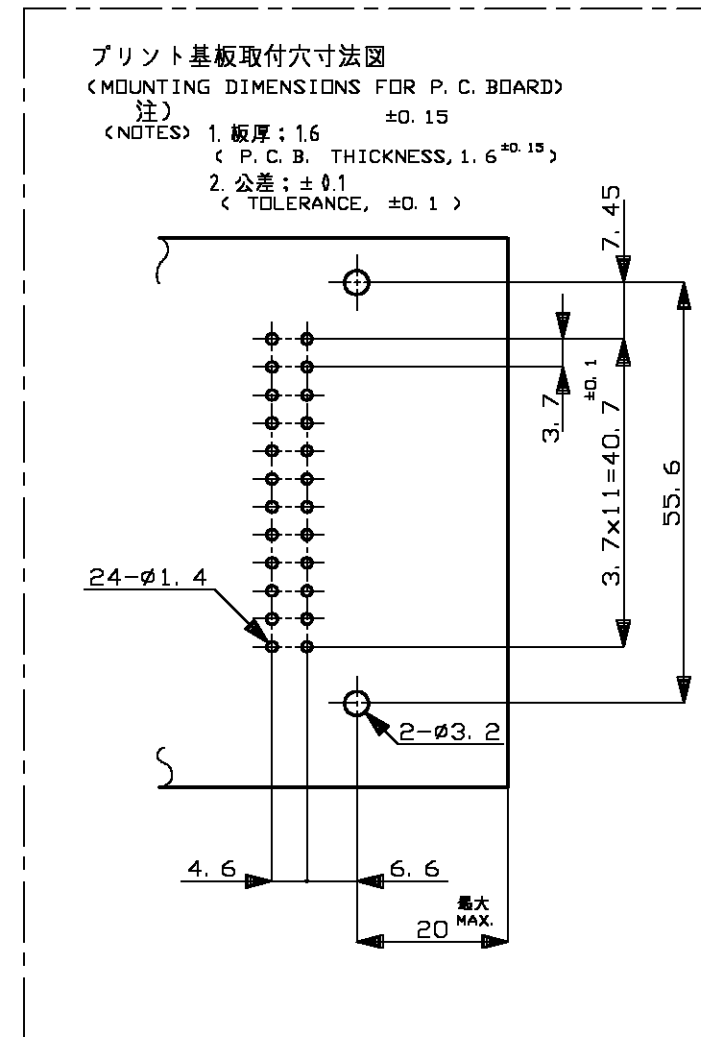
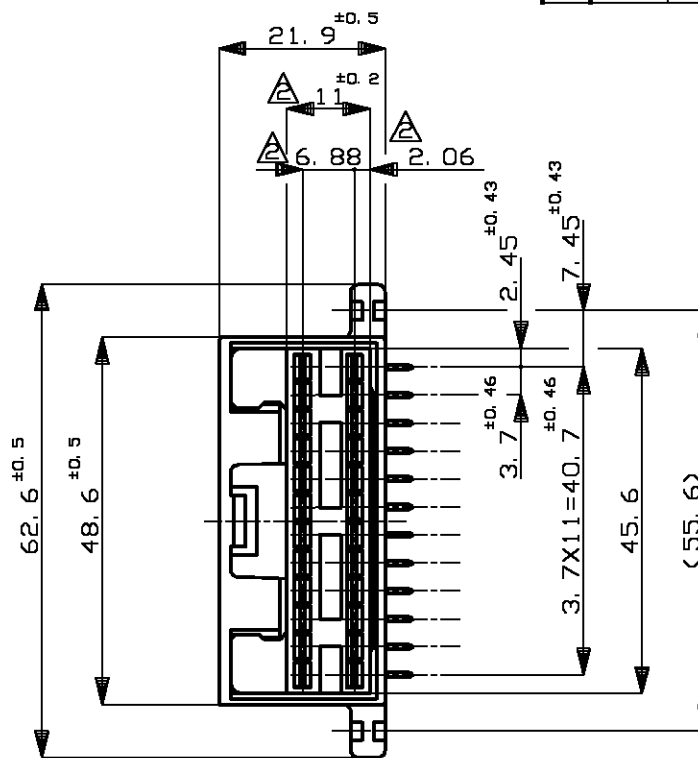
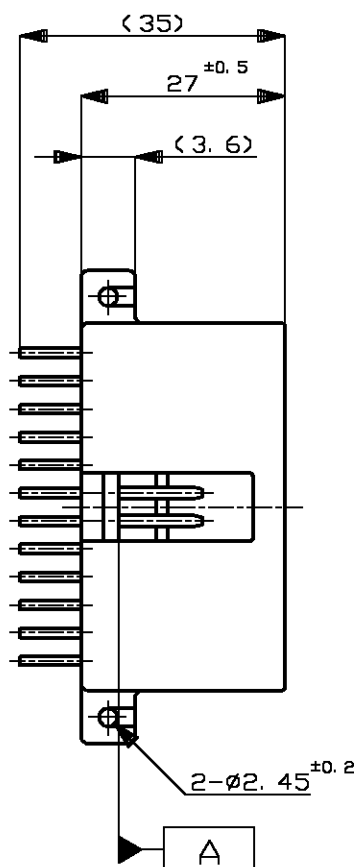


LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E3	REVISED	ECR-08-025567	100CT08	TS	KB

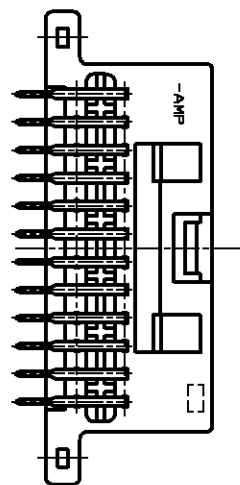

1. 嵌合相手ハウジング; 172317
2. [A]面より2mmの範囲で測定のこと
3. 全面ニッケルメッキ上に接触部分は金めっき
ハンダ付け部は、ハンダメッキ
4. 推奨取付けねじ; JIS B 1115 又は、1122 タッピングねじに
なべ1種又は2種、呼び径3で締付けた後、ハンダ付けをする
5. 金及び、錫めっき混合タイプの金めっき配置図
下図参照のこと
6. 適用製品規格 No.108-5157

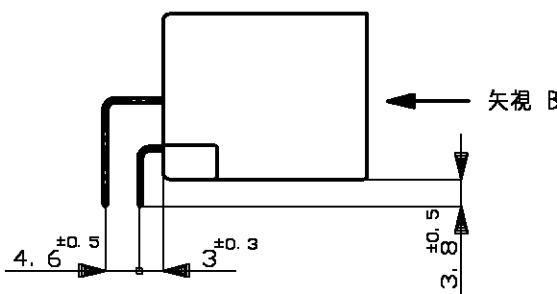

- 1 THE MATING PLUG HSG PART NUMBER ; 172317
- 2 TO BE MEASURED WITHIN 2mm FROM [A]
- 3 GOLD PLATING FOR CONTACT AREA AND TIN-LEAD
PLATING FOR SOLDERING AREA OVER ALL-OVER
NICKEL PLATING.
- 4 RECOMMENDED MOUNTING SCREW; 3mmDIA, PAN HEAD,
CLASS 1&2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122
- 5 LAYOUT OF GOLD PLATING CONTACTS ; [] MARK
(MIXED GOLD PLATING AND PRE-TINNED CONTACTS)



6 APPLICABLE PRODUCT. SPEC NO. 108-5157

	[A]	SELECTIVE TIN (MATTE)	SELECTIVE GOLD	白色 WHITE	2-5172730-1
	[A]	TIN-LEAD	SELECTIVE TIN (BRIGHT)	白色 WHITE	4-172730-1
	[A]	PRE-TIN	SELECTIVE GOLD [A]	白色 WHITE	2-172730-1
	[A]	TIN-LEAD	SELECTIVE GOLD [A]	黄色 YELLOW	1-172730-7
	[A]	TIN-LEAD	SELECTIVE GOLD [A]	灰色 GRAY	1-172730-6
	[A]	TIN-LEAD	SELECTIVE GOLD [A]	白色 WHITE	1-172730-1
	[A]	PRE-TIN	SELECTIVE GOLD [A]	白色 WHITE	172730-1
	[A]	半田付け部 SOLDERING SIDE	嵌合部側 CONTACT SIDE	ハウジング色 HOUSING COLOR	型番 PART NUMBER
	[A]	金めっき配置図 LAYOUT OF GOLD PL. CONTACT		CONTACT FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	T.SHINOHARA	09MAY07
CHK	K.BETSUI	09MAY07
APVD	K.BETSUI	09MAY07
PRODUCT SPEC	製品規格	
APPLICATION SPEC	取付適用規格	
WEIGHT	-	

Tyco Electronics Corporation
Kawasaki, Japan

PULSE LOCK CONNECTOR
24POSITION CAP HOUSING ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-172730	-

CUSTOMER DRAWING

SCALE	SHEET	REV
尺度 1:1	1 OF 1	E3

一般公差 (GENERAL TOLERANCE)	10以下: ±0.2 10以上 30以下: ±0.25 30以上 100以下: ±0.3 角度: ±3°
-----------------------------	---

MATERIAL
材料
HSG: PBT
CONTACT: BRASS

FINISH
仕上