

84 INCHES LENGTH




Connector A
112234
BNC Jack Straight
Bulkhead - Rear Mount Brass Nickel

50 Ohm RG-174
Continuity/Hi-Pot

Connector B
132245
SMA Jack Right Angle
Bulkhead - Rear Mount Brass Gold + Heatshrink

Assembly & Label Notes

Assembly label to be placed ~ 2" from end of connector A and/ or heat shrink
Assembly shall be built with SN96.5 LEAD FREE solder.
See Routing Notes for additional assembly & testing instructions.

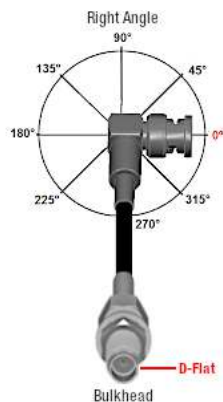

Connector A		Cable		Connector B	
Part #:	112234	Part #:	RG-174	Part #:	132245
Description:	BNC Clamp BHD JK RG188 500	Description:	RG-174 - PE 0.1	Description:	SMA R/A BHD JK RG174 RG316 LMR100 500
Type:	BNC	Dielectric:	PE	Type:	SMA
Gender:	Jack	Shielding:	Braid	Gender:	Jack
Body Type:	Straight	Diameter:	0.1	Body Type:	Right Angle
Contact Type:	Crimp	Impedance:	50 Ohm	Contact Type:	Solder
Polarity:	Standard	Sheathing:	None	Polarity:	Standard
Impedance:	50 Ohm	Testing:	Continuity Hi-Pot	Impedance:	50 Ohm
Mounting:	Bulkhead - Rear Mount	Length:	84 Inches	Mounting:	Bulkhead - Rear Mount
Body Material:	Brass			Body Material:	Brass
Body Finish:	Nickel			Body Finish:	Gold
IP Rating:	None			IP Rating:	None
Contact Material:	Beryllium Copper			Contact Material:	Beryllium Copper
Contact Finish:	Silver			Contact Finish:	Gold
Max. Freq.:	4 GHz			Max. Freq.:	12.4 GHz
Booting:	BNC Jack Straight BHD			Booting:	SMA Jack Right Angle
				Clacking:	0°



CONTROLLED DOCUMENT - DO NOT COPY

THIS DRAWING MAY CONTAIN PATENTED OR PROPRIETARY INFORMATION AND MUST NOT BE USED FOR ANY PURPOSE DETRIMENTAL TO CUSTOM CABLE INC. IT MAY NOT BE REPRODUCED OR TRANSCRIBED IN ANY FORM WITHOUT THE WRITTEN CONSENT OF CUSTOM CABLE INC. ACCEPTANCE OF THIS DRAWING ESTABLISHES AND AGREEMENT OF THE FOREGOING.

Title:
BNC-ST-JK/SMA-RA-JK G174 84I

Part No:
Q-0402P0003084i

UNLESS SPECIFIED
TOLERANCE:
0-18 inches +/- 1/2"
over 18" +/- 2%
ASSEMBLY:
CENTER LABEL IF LENGTH
IS LESS THAN 12 INCHES