

National Semiconductor is now part of
Texas Instruments.

Search <http://www.ti.com/> for the latest technical
information and details on our current products and services.

LM95172

13-Bit to 16-Bit 200°C Digital Temp Sensor with 3-Wire Interface

General Description

The LM95172EWG is an integrated digital-output temperature sensor with a Serial Peripheral Interface (SPI) and MICROWIRE™-compatible interface in a 10-pin Cerpack high temperature ceramic package. It features a very linear Sigma-Delta Analog-to-Digital Converter (ADC), high accuracy, fast conversion rates, and extremely low output noise. With an operating temperature as low as -40°C and optimized accuracy from 120°C to 200°C, it is ideal for high-temperature applications.

The over-temperature alarm output ($\overline{\text{OVERTEMP}}$) asserts when the die temperature exceeds a programmed T_{HIGH} limit. The user-programmed T_{LOW} limit creates a temperature-stabilizing hysteresis when the ambient temperature is near the trip point.

The LM95172EWG can be programmed to operate from 13 bits (0.0625°C per LSB) to 16 bits (0.0078125°C per LSB) resolution. The LM95172EWG powers up in 35 ms, the fastest conversion time, with temperature output set at 13-bit resolution. The resolution may then be changed to 14-, 15- or 16-bits. When in the 13-, 14- or 15-bit resolution mode, the least significant bit in the 16-bit temperature register toggles after the completion of each conversion. This bit may be monitored to verify that the conversion is complete.

The high noise immunity of the Serial I/O (S/I/O) output makes the LM95172EWG ideal for use in challenging electromagnetic environments.

Applications

- Automotive high temperature applications
- Industrial Power Controllers
- Industrial motors, gear boxes
- Geothermal instrumentation
- High Temperature Test Equipment


Features

- LM95172EWG is AEC-Q100 Grade 0 qualified and is manufactured on an Automotive Grade Flow.
- 13-bit (0.0625°C LSB) to 16-bit (0.0078125°C LSB) temperature resolution
- Wide -40°C to +200°C temperature range
- 35 ms best conversion time tracks fast temp changes
- $\overline{\text{OVERTEMP}}$ digital output switches when $T_{\text{DIE}} > T_{\text{HIGH}}$
- Shutdown mode saves power yet wakes up for one-shot temperature update
- SPI and MICROWIRE Bus interface
- 10-Pin Cerpack high-temperature ceramic package

Key Specifications

| | |
|-------------------------------------|---|
| ■ Analog and Digital Supply Voltage | 3.0V to 5.5V |
| ■ Total Supply Current | Operating 400 μA (typ) |
| | Shutdown -40°C to +140°C 4 μA (max) |
| | Shutdown -40°C to +175°C 12 μA (max) |
| | Shutdown -40°C to +200°C 28 μA (max) |
| ■ Temperature Accuracy | |
| | +175°C to +200°C $\pm 3.0^\circ\text{C}$ (max) |
| | +130°C to +160°C $\pm 1.0^\circ\text{C}$ (max) |
| | +120°C to +130°C $\pm 2.0^\circ\text{C}$ (max) |
| | +160°C to +175°C $\pm 2.0^\circ\text{C}$ (max) |
| | -40°C to +120°C $\pm 3.5^\circ\text{C}$ (max) |
| ■ Temperature Resolution | |
| | 13-bit mode 0.0625°C/LSB |
| | 16-bit mode 0.0078125°C/LSB |
| ■ Conversion Time | |
| | 13-bit mode 43 ms (max) |
| | 16-bit mode 350 ms (max) |

Connection Diagram

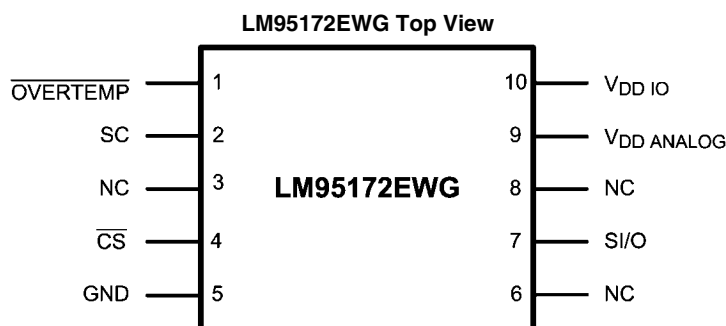


30076602

MICROWIRE™ is a trademark of National Semiconductor Corporation.
 TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Pin Descriptions

| Pin Number | Name | Type | Description | Typical Connection |
|------------|------------------------------|---------------|------------------------------------|---|
| 1 | $\overline{\text{OVERTEMP}}$ | Output | $\overline{\text{OVERTEMP}}$ Alarm | Over-temperature Alarm Output, Open-drain. Active Low on POR. Requires a pull-up resistor to $V_{\text{DD IO}}$. |
| 2 | SC | Input | Serial Clock input | Serial clock from the Controller |
| 3 | NC | N/A | No Connect | Do not connect to this pin. |
| 4 | $\overline{\text{CS}}$ | Input | Chip Select input | Chip Select input for the bus. Low pass filtered. |
| 5 | GND | Ground | Power Supply Ground | Ground |
| 6 | NC | N/A | No Connect | Do not connect to this pin. |
| 7 | SI/O | Bidirectional | Serial I/O | Serial I/O Data line to or from the Controller |
| 8 | NC | N/A | No Connect | Do not connect to this pin. |
| 9 | $V_{\text{DD ANALOG}}$ | Power | Analog Power Supply Voltage | DC Voltage from 3.0V to 5.5V. Bypass with a 10 nF ceramic capacitor near the pad to ground. |
| 10 | $V_{\text{DD IO}}$ | Power | Digital Power Supply Voltage | DC Voltage from 3.0V to 5.5V. Bypass with a 10 nF ceramic capacitor near the pin to ground. |

Simplified Block Diagram

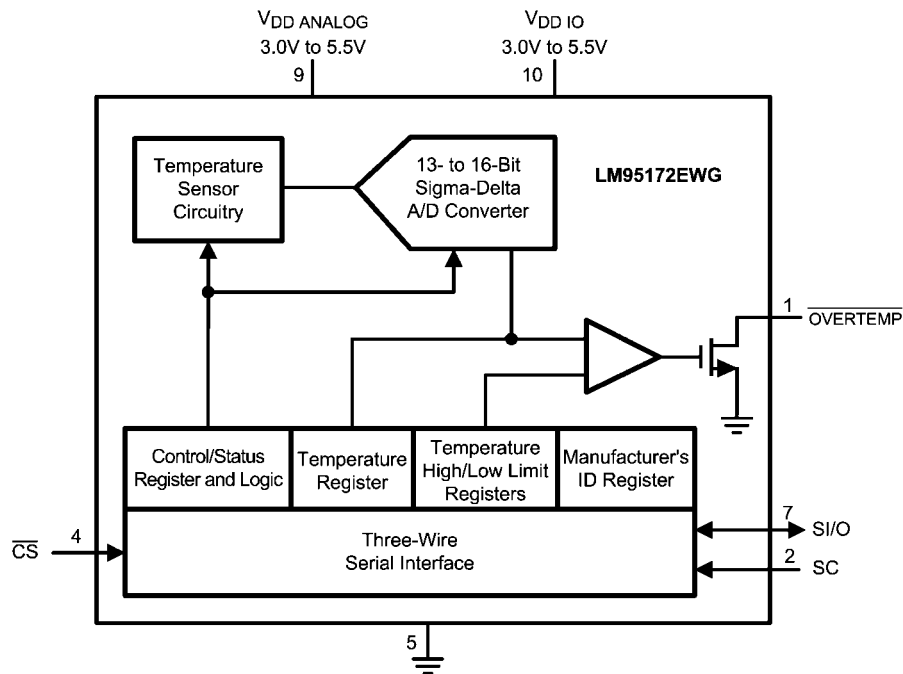


30076601

Ordering Information

| Order Number | NS Package Number | Transport Media |
|--------------|-------------------|------------------|
| LM95172EWG | WG10A | 54 units in tray |

Typical Application

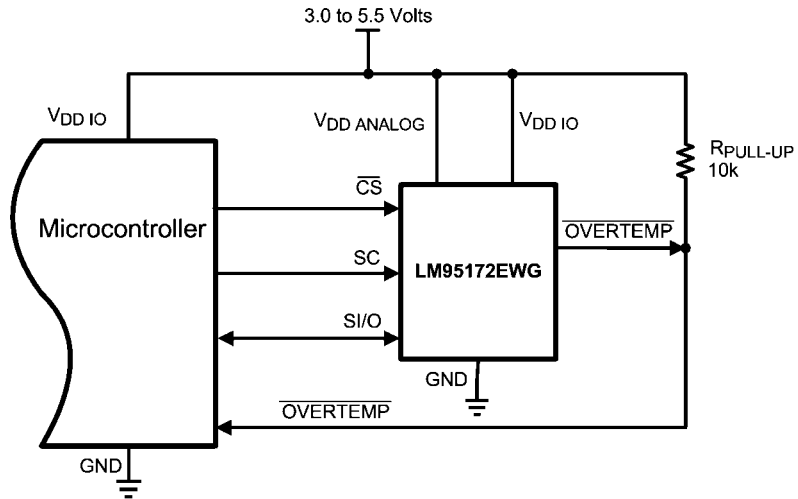

30076603

FIGURE 1. Microcontroller Interface - normal connection

Absolute Maximum Ratings (Note 1)

| | |
|---|----------------------------------|
| $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ Supply Voltages | -0.2V to 6.0V |
| Voltage at any Pin | -0.2V to ($V_{DD\ IO} + 0.2V$) |
| Input Current at any Pin | 5 mA |
| Storage Temperature | -65°C to +175°C |
| Soldering Information | |
| Infrared or Convection (20 sec.) | 235°C |
| ESD Susceptibility <small>(Note 7)</small> | |
| Human Body Model | 2500 V |
| Machine Model | 250 V |
| Charged Device Model | 1000 V |

Operating Ratings

| | |
|------------------------------|-----------------|
| Specified Temperature Range | -40°C to +200°C |
| Analog Supply Voltage Range | +3.0V to +5.5V |
| $V_{DD\ ANALOG}$ | |
| Digital Supply Voltage Range | +3.0V to +5.5V |
| $V_{DD\ IO}$ | |

Package Thermal Resistances

| Package | θ_{JA} |
|-----------------|---------------|
| 10-Lead CERPACK | 175°C/W |

Temperature-to-Digital Converter Characteristics

Unless otherwise noted, these specifications apply for $V_{DD\ ANALOG} = V_{DD\ IO} = 3.0V$ to $3.6V$. (Note 8) **Boldface limits apply for $T_A = -40^\circ C$ to $+200^\circ C$** ; all other limits $T_A = 25^\circ C$, unless otherwise noted.

| Parameter | Conditions | Typical <small>(Note 3)</small> | LM95172EWG Limits <small>(Note 2)</small> | Units <small>(Limit)</small> | |
|---|--|--------------------------------------|---|------------------------------|---------------|
| Temperature Accuracy <small>(Note 8)</small> | $T_A = +175^\circ C$ to $+200^\circ C$ | | ± 3.0 | °C (max) | |
| | $T_A = +130^\circ C$ to $+160^\circ C$ | | ± 1.0 | | |
| | $T_A = +120^\circ C$ to $+130^\circ C$ | | ± 2.0 | | |
| | $T_A = +160^\circ C$ to $+175^\circ C$ | | ± 2.0 | | |
| | $T_A = -40^\circ C$ to $+120^\circ C$ | | ± 3.5 | | |
| Resolution | Res 1 Bit Res 0 Bit 0 0 | 13 0.0625 | | Bits °C | |
| | 0 1 | 14 0.03125 | | Bits °C | |
| | 1 0 | 15 0.015625 | | Bits °C | |
| | 1 1 | 16 0.0078125 | | Bits °C | |
| Temperature Conversion Time | For 13 Bits Resolution | | 43 | ms (max) | |
| | For 14 Bits Resolution | | 87 | | |
| | For 15 Bits Resolution | | 175 | | |
| | For 16 Bits Resolution | | 350 | | |
| Total Quiescent Current <small>(Note 9)</small> | Bus Inactive Continuous Conversion Mode | $T_A = -40^\circ C$ to $140^\circ C$ | 400 | 456 | μA (max) |
| | | $T_A = -40^\circ C$ to $175^\circ C$ | | 510 | |
| | | $T_A = -40^\circ C$ to $200^\circ C$ | 500 | 650 | |
| | Shutdown Mode | $T_A = -40^\circ C$ to $140^\circ C$ | | 4 | |
| | | $T_A = -40^\circ C$ to $175^\circ C$ | | 12 | |
| | | $T_A = -40^\circ C$ to $200^\circ C$ | 28 | 75 | |

| Parameter | Conditions | Typical (Note 3) | LM95172EWG Limits (Note 2) | Units (Limit) |
|-----------------------------|--|---------------------|----------------------------------|------------------|
| Power-On Reset Threshold | $T_A = -40^{\circ}\text{C}$ to 140°C | | 0.9 | V (min) |
| | | | 2.1 | V (max) |
| | $T_A = -40^{\circ}\text{C}$ to 175°C | | 0.8 | V (min) |
| | | | 2.1 | V (max) |
| | $T_A = -40^{\circ}\text{C}$ to 200°C | | 0.3 | V (min) |
| | | | 2.1 | V (max) |

Logic Electrical Characteristics

Digital DC Characteristics

Unless otherwise noted, these specifications apply for $V_{DD\ ANALOG} = V_{DD\ IO} = 3.0V$ to $3.6V$. (Note 8). **Boldface limits apply for $T_A = -40^\circ C$ to $200^\circ C$** ; all other limits $T_A = +25^\circ C$, unless otherwise noted.

| Symbol | Parameter | Conditions | Typical (Note 3) | Limits (Note 2) | Units (Limit) |
|-------------------------------------|---|--------------------------------|---------------------|--------------------------|------------------|
| V_{IH} | Logical "1" Input Voltage | | | $0.75 \times V_{DD\ IO}$ | V (min) |
| V_{IL} | Logical "0" Input Voltage | | | $0.25 \times V_{DD\ IO}$ | V (max) |
| V_{HYST} Digital Input Hysteresis | | $V_{DD\ IO} = 3.0V$ | 0.63 | 0.42 | V (min) |
| | | $V_{DD\ IO} = 3.3V$ | 0.79 | 0.56 | |
| | | $V_{DD\ IO} = 3.6V$ | 0.97 | 0.72 | |
| | | $V_{DD\ IO} = 4.5V$ | | 0.9 | |
| | | $V_{DD\ IO} = 5.0V$ | | 1.0 | |
| | | $V_{DD\ IO} = 5.5V$ | | 1.1 | |
| I_{IH} | Logical "1" Input Leakage Current | $V_{IN} = V_{DD\ IO}$ | | 1 | μA (max) |
| I_{IL} | Logical "0" Input Current | $V_{IN} = 0V$ | | -1 | μA (max) |
| V_{OH} | Output High Voltage | $I_{OH} = 100\ \mu A$ (Source) | | $V_{DD\ IO} - 0.2$ | V (min) |
| | | $I_{OH} = 2\ mA$ (Source) | | $V_{DD\ IO} - 0.45$ | |
| V_{OL} | Output Low Voltage | $I_{OL} = 100\ \mu A$ (Sink) | | 0.2 | V (max) |
| | | $I_{OL} = 2\ mA$ (Sink) | | 0.45 | |
| | $\overline{OVERTEMP}$ Output Saturation Voltage | $I_{OL} = 2\ mA$ (Sink) | | 0.45 | V(max) |

Serial Bus Digital Switching Characteristics

Unless otherwise noted, these specifications apply for $V_{DD\text{ANALOG}} = V_{DD\text{IO}} = 3.0\text{V}$ to 3.6V (Note 8); C_L (load capacitance) on output lines = 100 pF unless otherwise specified. **Boldface limits apply for $T_A = -40^\circ\text{C}$ to 200°C** ; all other limits $T_A = +25^\circ\text{C}$, unless otherwise noted.

| Symbol | Parameter | Typical (Note 3) | Limits (Note 2) | Units (Limit) |
|------------------|--|---------------------|--------------------|---------------------|
| t_1 | SC (Serial Clock) Period | | 765 | ns (min) |
| t_2 | $\overline{\text{CS}}$ (Chip Select) Low to SC High Set-Up Time (Note 5) | | 1.25 | μs (min) |
| t_3 | $\overline{\text{CS}}$ Low to SI/O Output Delay (Note 5) | | 1 | μs (max) |
| t_4 | SC Low to SI/O Output Delay | | 120 | ns (max) |
| t_5 | $\overline{\text{CS}}$ High to Data Out (SI/O) TRI-STATE | | 220 | ns (max) |
| t_6 | SC High to SI/O Input Hold Time | | 50 | ns (min) |
| t_7 | SI/O Input to SC High Set-Up Time | | 30 | ns (min) |
| t_8 | SC Low to $\overline{\text{CS}}$ High Hold Time | | 50 | ns (min) |
| t_{TA} | Data Turn-Around Time: SI/O input (write to LM95172EWG) to output (read from LM95172EWG) | | 130 | ns (max) |
| t_{BUF} | Bus free time between communications: $\overline{\text{CS}}$ High to $\overline{\text{CS}}$ Low. (Note 5) | | 5 | μs (min) |

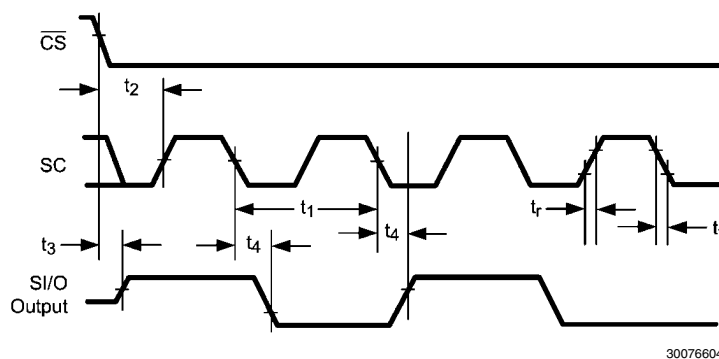


FIGURE 2. Data Output Timing Diagram

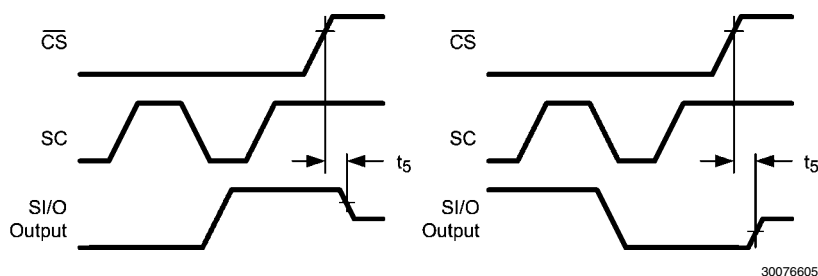


FIGURE 3. TRI-STATE Data Output Timing Diagram

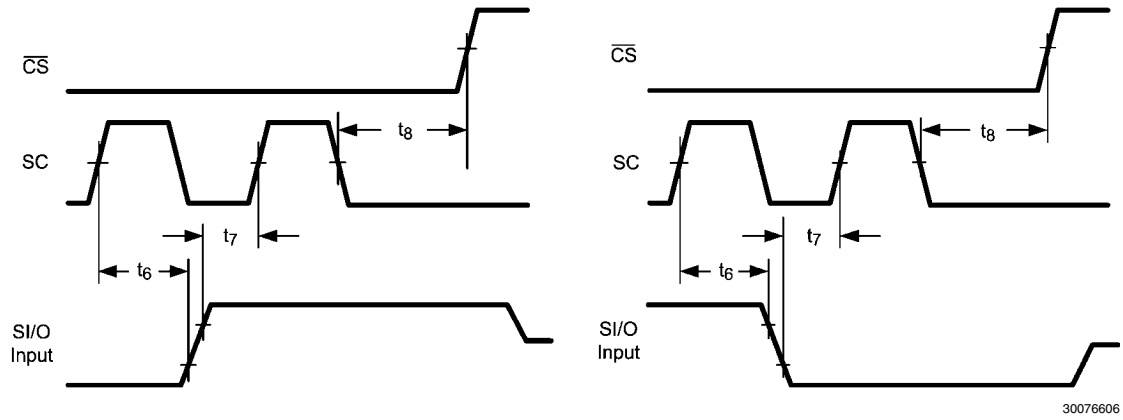
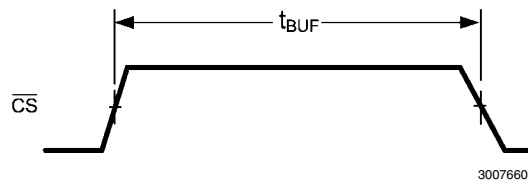
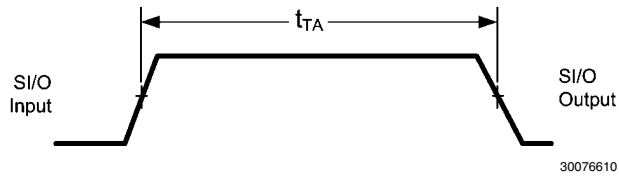


FIGURE 4. Data Input Timing Diagram

FIGURE 5. t_{BUF} Timing Definition DiagramFIGURE 6. t_{TA} Timing Definition Diagram

Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur, including inoperability and degradation of device reliability and/or performance. Functional operation of the device and/or non-degradation at the Absolute Maximum Ratings or other conditions beyond those indicated in the Operating Ratings is not implied. The Operating Ratings indicate conditions at which the device is functional and the device should not be operated beyond such conditions.

Note 2: The Electrical characteristics tables list guaranteed specifications under the listed Operating Ratings except as otherwise modified or specified by the Electrical Characteristics Conditions and/or Notes. Typical specifications are estimations only and are not guaranteed.

Note 3: Typical values represent most likely parametric norms at specific conditions (Example V_{CC} ; specific temperature) and at the recommended Operating Conditions at the time of product characterizations and are not guaranteed.

Note 4: Specification is guaranteed by characterization and is not tested in production

Note 5: Specification is guaranteed by design and is not tested in production

Note 6: Invalid. The LM95172EWG will return a "0" if read. If written to, no valid register will be modified.

Note 7: Human body model, 100 pF discharged through a 1.5 k Ω resistor. Machine model, 200 pF discharged through a 1.5 k Ω resistor. The Charged Device Model (CDM) is a specified circuit characterizing an ESD event that occurs when a device acquires charge through some triboelectric (frictional) or electrostatic induction processes and then abruptly touches a grounded object or surface.

Note 8: The LM95172EWG will operate properly over the $V_{DD\ ANALOG} = 3.0V$ to 5.5V and $V_{DD\ IO} = 3.0V$ to 5.5V supply voltage ranges.

Note 9: Total Quiescent Current includes the sum of the currents into the $V_{DD\ ANALOG}$ and the $V_{DD\ IO}$ Pins.

Note 10: This specification is provided only to indicate how often temperature data is updated. The LM95172EWG can be read at any time without regard to conversion state (and will yield last conversion result). A conversion in progress will not be interrupted. The output shift register will be updated at the completion of the read and a new conversion restarted.

TRI-STATE Test Circuit

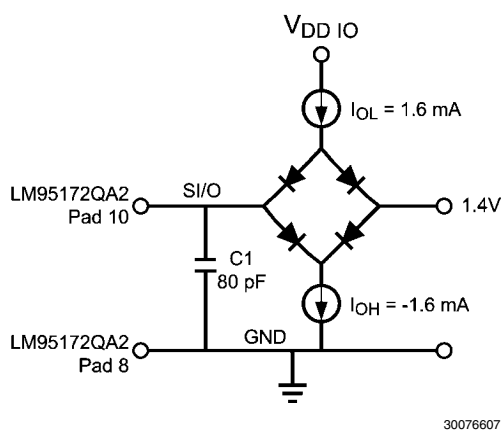


FIGURE 7.

1.0 Functional Description

The LM95172EWG temperature sensor incorporates a temperature sensor and a 13-bit to 16-bit $\Sigma\Delta$ ADC (Sigma-Delta Analog-to-Digital Converter). Compatibility of the LM95172EWG's three wire serial interface with SPI and MI-

CROWIRE allows simple communications with common microcontrollers and processors. Shutdown mode can be used to optimize current drain for different applications. A Manufacturer's/Device ID register identifies the LM95172EWG as National Semiconductor product. See Figure 8 for the Functional Block Diagram.

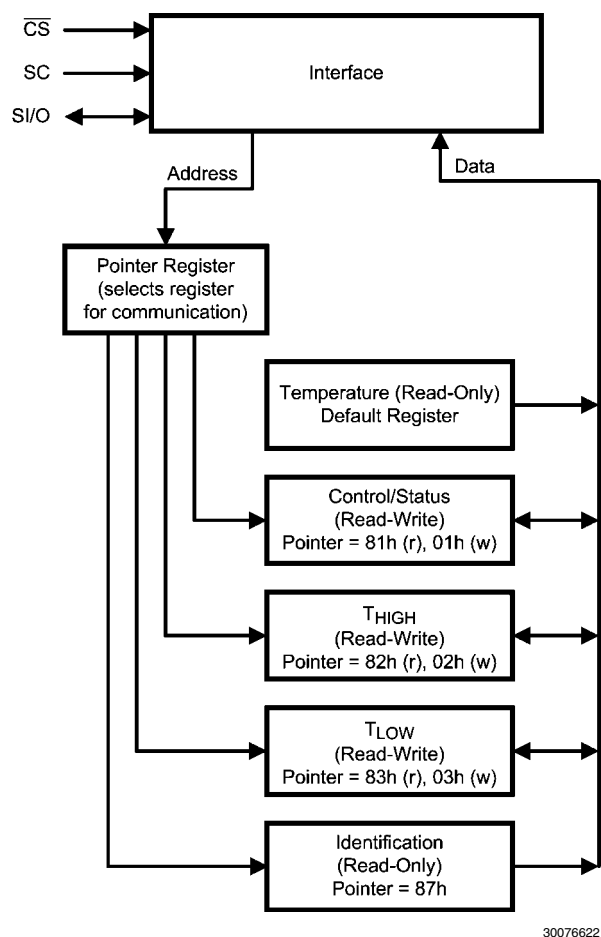


FIGURE 8. LM95172EWG Functional Block Diagram

1.1 INITIAL SOFTWARE RESET AND POWER-UP SEQUENCES AND POWER ON RESET (POR)

1.1.1 Software Reset Sequence

A software reset sequence must be followed, after the initial $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ supply voltages reach their specified minimum operating voltages, in order to ensure proper operation of the LM95172EWG.

The software reset sequence is as follows:

1. Allow $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ to reach their specified minimum operating voltages, as specified in the Operating Ratings section, and in a manner as specified in section 1.1.2 below.
2. Write a "1" to the Shutdown bit, Bit 15 of the Control/Status Register, and hold it high for at least the specified maximum conversion time for the initial default of 13-bits resolution, in order to ensure that a complete reset operation has occurred. (See the Temperature Conversion Time specifications within the Temperature-to-Digital Characteristics section.)
3. Write a "0" to the Shutdown bit to restore the LM95172EWG to normal mode.
4. Wait for at least the specified maximum conversion time for the initial default of 13-bits resolution in order to ensure that accurate data appears in the Temperature Register.

1.1.2 Power-Up Sequence

Warning: In all cases listed below the $V_{DD\ ANALOG}$ waveform must not lag the $V_{DD\ IO}$ waveform

A. Linear Power-up

In the case where the $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ voltage-vs.-time function is linear, the specified minimum operating voltage must be reached in 5 ms or less.

B. Resistor-Capacitor (R-C) Charging Exponential Power-up

In the case where the $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ voltage-vs.-time function is as a typical R-C Charging exponential function the time constant must be less than or equal to 1.25 ms.

C. Other Power-up Functions

In the case where the $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ voltage-vs.-time characteristic follows another function the following requirements must be met:

- (1) The specified minimum operating voltage values for $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ must be reached in 5 ms or less.
- (2) The slope of the $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ power-up curves must be greater than or equal to 0.7 V/ms at any time before the specified minimum operating voltage is reached.
- (3) The slope of the $V_{DD\ ANALOG}$ and $V_{DD\ IO}$ power-up curves must not allow ringing such that the voltage is allowed to drop below the specified minimum operating voltage at any time after the specified minimum operating voltage is reached.

1.1.3 Power On Reset (POR)

After the requirements of section 1.1.1 and 1.1.2 above are met each register will then contain its defined POR default value. Any of the following actions may cause register values to change from their POR value:

1. The master writes different data to any Read/Write (R/W) bits, or
2. The LM95172EWG is powered down.

The specific POR Value of each register is listed in Section 1.7 under Internal Register Structure.

1.2 ONE SHOT CONVERSION


The LM95172EWG features a one-shot conversion bit, which is used to initiate a single conversion and comparison cycle when the LM95172EWG is in shutdown mode. While the LM95172EWG is in shutdown mode, writing a "1" to the One-Shot bit in the Control/Status Register will cause the LM95172EWG to perform a single temperature conversion and update the Temperature Register and the affected status bits. Operating the LM95172EWG in this one-shot mode allows for extremely low average-power consumption, making it ideal for low-power applications.

When the One-shot bit is set, the LM95172EWG initiates a temperature conversion. After this initiation, but before the completion of the conversion, and resultant register updates, the LM95172EWG is in a "one-shot" state. During this state, the Data Available (DAV) flag in the Control/Status Register is "0" and the Temperature Register contains the value 8000h

(-256°C). All other registers contain the data that was present before initiating the one-shot conversion. After the temperature measurement is complete, the DAV flag will be set to "1" and the temperature register will contain the resultant measured temperature.

1.3 OVERTEMP OUTPUT

The Over-temperature ($\overline{\text{OVERTEMP}}$) output is a temperature switch signal that indicates when the measured temperature exceeds the T_{HIGH} programmed limit. The programmable T_{HIGH} register sets the high temperature limit and the T_{LOW} register is used to set the hysteresis. The T_{LOW} register also sets the temperature below which the $\overline{\text{OVERTEMP}}$ output resets. The $\overline{\text{OVERTEMP}}$ output of the LM95172EWG behaves as a temperature comparator. The following explains the operation of $\overline{\text{OVERTEMP}}$. Figure 9 illustrates the $\overline{\text{OVERTEMP}}$ output behavior.

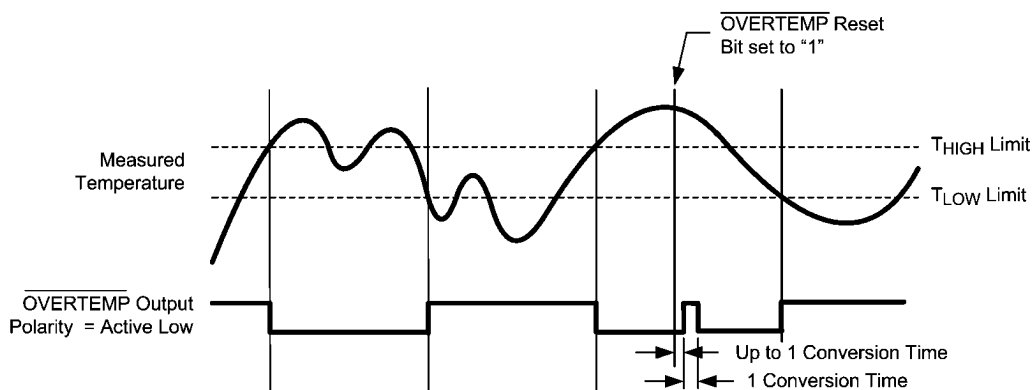

NOTE: The $\overline{\text{OVERTEMP}}$ output asserts when the measured temperature is *greater than* the T_{HIGH} value.

30076621

FIGURE 9. LM95172EWG $\overline{\text{OVERTEMP}}$ vs. Temperature Response Diagram

The $\overline{\text{OVERTEMP}}$ Output will assert when the measured temperature is greater than the T_{HIGH} value. $\overline{\text{OVERTEMP}}$ will reset if any of the following events happen:

1. The temperature falls below the value stored in the T_{LOW} register, or
2. A "1" is written to the $\overline{\text{OVERTEMP}}$ Reset bit in the Control/Status Register.

If $\overline{\text{OVERTEMP}}$ is cleared by the master writing a "1" to the $\overline{\text{OVERTEMP}}$ Reset bit while the measured temperature still exceeds the T_{HIGH} value, $\overline{\text{OVERTEMP}}$ will assert again after the completion of the next temperature conversion. Placing the LM95172EWG in shutdown mode or triggering a one-shot conversion does not cause $\overline{\text{OVERTEMP}}$ to reset.

1.4 COMMUNICATING WITH THE LM95172EWG

The serial interface consists of three lines: \overline{CS} (Chip Select), SC (Serial Clock), and the bi-directional SI/O (Serial I/O) data line. A high-to-low transition of the \overline{CS} line initiates the communication. The master (processor) always drives the chip select and the clock. The first 16 clocks shift the temperature data out of the LM95172EWG on the SI/O line (a temperature read). Raising the \overline{CS} at anytime during the communication will terminate this read operation. Following this temperature read, the SI/O line becomes an input and a command byte can be written to the LM95172EWG. This command byte

contains a R/W bit and the address of the register to be communicated with next (see Section 1.7 Internal Register Structure). When writing, the data is latched in after every 8 bits. The processor must write at least 8 bits in order to latch the data. If \overline{CS} is raised before the falling edge of the 8th command bit, no data will be latched into the command byte. If \overline{CS} is raised after the 8th bit, but before the 16th bit, of a write to a 16-bit data register, only the most significant byte of the data will be latched. This command-data-command-data sequence may be performed as many times as desired.

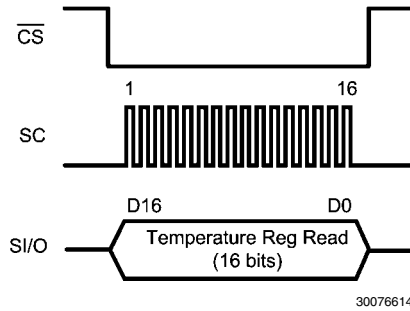


FIGURE 10. Reading the Temperature Register

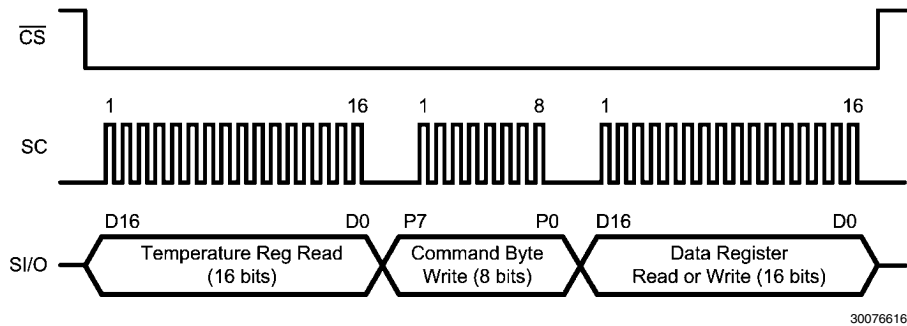


FIGURE 11. Reading the Temperature Register followed by a read or write from another register (Control/Status, T_{HIGH} , T_{LOW} , or Identification register)

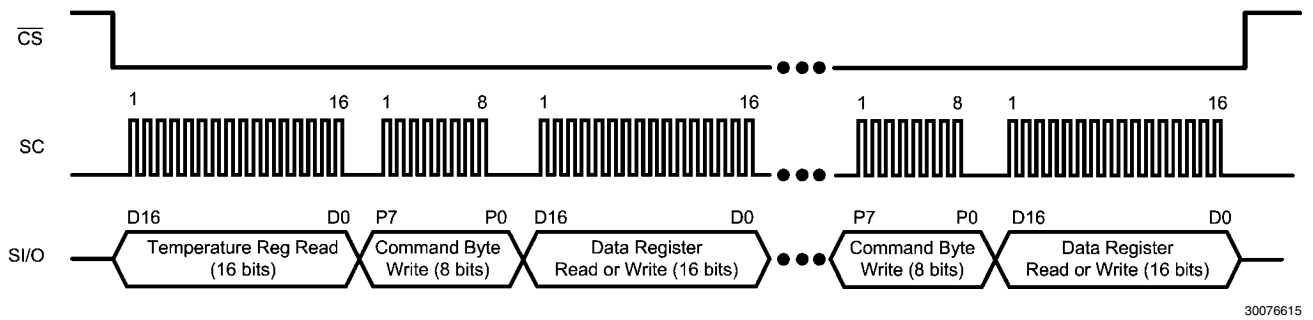


FIGURE 12. Reading the Temperature Register followed by repeated commands and Data Register accesses (Control/Status, T_{HIGH} , T_{LOW} , or Identification register)

1.5 TEMPERATURE DATA FORMAT

Temperature data is represented by a 13- to 16-bit, two's complement word with a Least Significant Bit (LSB) equal to

0.0625 °C (13-bits), 0.03125 °C (14-bits), 0.015625 °C (15-bits) or 0.0078125 °C (16-bits). See Section 1.7.2 for definition of the bits in the Temperature Register.

13-Bit Resolution. First Bit (D15) is Sign, the last bit (D0) is Toggle and bits D1 and D2 are always 0.

| Temperature | 13-bit Resolution Digital Output | | |
|-------------|----------------------------------|-------------|---------------|
| | 16-bit Binary | All 16 Bits | Bits D15 - D3 |
| | | Hex | Hex |
| +175°C | 0101011110000 000 | 5780 | 0AF0 |
| | 0101011110000 001 | 5781 | |
| +150°C | 0100101100000 000 | 4B00 | 0960 |
| | 0100101100000 001 | 4B01 | |
| +80°C | 0010100000000 000 | 2800 | 0500 |
| | 0010100000000 001 | 2801 | |
| +25°C | 0000110010000 000 | 0C80 | 0190 |
| | 0000110010000 001 | 0C81 | |
| +0.0625°C | 0000000000001 000 | 0008 | 0001 |
| | 0000000000001 001 | 0009 | |
| 0°C | 0000000000000 000 | 0000 | 0000 |
| | 0000000000000 001 | 0001 | |
| -0.0625°C | 1111111111111 000 | FFF8 | 1FFF |
| | 1111111111111 001 | FFF9 | |
| -40°C | 1110110000000 000 | EC00 | 1D80 |
| | 1110110000000 001 | EC01 | |

14-Bit Resolution. First bit (D15) is Sign, the last bit (D0) is Toggle and bit D1 is always 0.

| Temperature | 14-bit Resolution Digital Output | | |
|-------------|----------------------------------|-------------|---------------|
| | 16-bit Binary | All 16 Bits | Bits D15 - D2 |
| | | Hex | Hex |
| +175°C | 01010111100000 00 | 5780 | 15E0 |
| | 01010111100000 01 | 5781 | |
| +150°C | 01001011000000 00 | 4B00 | 12C0 |
| | 01001011000000 01 | 4B01 | |
| +80°C | 00101000000000 00 | 2800 | 0A00 |
| | 00101000000000 01 | 2801 | |
| +25°C | 00001100100000 00 | 0C80 | 0320 |
| | 00001100100000 01 | 0C81 | |
| +0.03125°C | 00000000000001 00 | 0004 | 0001 |
| | 00000000000001 01 | 0005 | |
| 0°C | 00000000000000 00 | 0000 | 0000 |
| | 00000000000000 01 | 0001 | |
| -0.03125°C | 11111111111111 00 | FFFC | 3FFF |
| | 11111111111111 01 | FFFD | |
| -40°C | 11101100000000 00 | EC00 | 3B00 |
| | 11101100000000 01 | EC01 | |

15-Bit Resolution. First bit (D15) is Sign and the last bit (D0) is Toggle.

| Temperature | 15-bit Resolution Digital Output | | |
|-------------|----------------------------------|-------------|---------------|
| | 16-bit Binary | All 16 Bits | Bits D15 - D1 |
| | | Hex | Hex |
| +175°C | 010101111000000 0 | 5780 | 2BC0 |
| | 010101111000000 1 | 5781 | |
| +150°C | 010010110000000 0 | 4B00 | 2580 |
| | 010010110000000 1 | 4B01 | |
| +80°C | 001010000000000 0 | 2800 | 1400 |
| | 001010000000000 1 | 2801 | |
| +25°C | 000011001000000 0 | 0C80 | 0640 |
| | 000011001000000 1 | 0C81 | |
| +0.015625°C | 000000000000001 0 | 0002 | 0001 |
| | 000000000000001 1 | 0003 | |
| 0°C | 000000000000000 0 | 0000 | 0000 |
| | 000000000000000 1 | 0001 | |
| -0.015625°C | 111111111111111 0 | FFFE | 7FFF |
| | 111111111111111 1 | FFFF | |
| -40°C | 111011000000000 0 | EC00 | 7600 |
| | 111011000000000 1 | EC01 | |

16-Bit Resolution. First bit (D15) is Sign and the last bit (D0) is the LSB.

| Temperature | 16-bit Resolution Digital Output | |
|--------------|----------------------------------|-------------|
| | 16-bit Binary | All 16 Bits |
| | | Hex |
| +175°C | 0101 0111 1000 0000 | 5780 |
| +150°C | 0100 1011 0000 0000 | 4B00 |
| +80°C | 0010 1000 0000 0000 | 2800 |
| +25°C | 0000 1100 1000 0000 | 0C80 |
| +0.0078125°C | 0000 0000 0000 0001 | 0001 |
| 0°C | 0000 0000 0000 0000 | 0000 |
| -0.0078125°C | 1111 1111 1111 1111 | FFFF |
| -40°C | 1110 1100 0000 0000 | EC00 |

The first data byte is the most significant byte with most significant bit first, permitting only as much data as necessary to be read to determine temperature condition. For instance, if the first four bits of the temperature data indicate an overtemperature condition, the host processor could immediately take action to remedy the excessive temperatures.

1.6 SHUTDOWN MODE

Shutdown Mode is enabled by writing a "1" to the Shutdown Bit, Bit 15 of the Control/Status Register, and holding it high for at least the specified maximum conversion time at the ex-

isting temperature resolution setting. (see Temperature Conversion Time specifications under the Temperature-to-Digital Characteristics section). For example, if the LM95172EWG is set for 16-bit resolution before shutdown, then Bit 15 of the Control/Status register must go high and stay high for the specified maximum conversion time for 16-bits resolution.

The LM95172EWG will always finish a temperature conversion and update the temperature registers before shutting down.

Writing a "0" to the Shutdown Bit restores the LM95172EWG to normal mode.

1.7 INTERNAL REGISTER STRUCTURE

The LM95172EWG has four registers that are accessible by issuing a command byte (a R/\overline{W} Bit plus the register address: Control/Status, T_{HIGH} , T_{LOW} , and Identification). Which of these registers will be read or written is determined by the Command Byte. See Section 1.4, "Communicating with the LM95172EWG", for a complete description of the serial communication protocol. The following diagram describes the Command Byte and lists the addresses of the various registers. On power-up, the Command Byte will point to the Temperature Register by default. The temperature is read by lowering the \overline{CS} line and then reading the 16-Bit temperature register; all other registers are accessed by writing a Command Byte after reading the temperature.

All registers can be communicated with, either in Continuous Conversion mode or in Shutdown mode. When the LM95172EWG has been placed in Shutdown Mode, the Temperature register will contain the temperature data which resulted from the last temperature conversion (whether it was the result of a continuous-conversion reading or a one-shot reading).

1.7.1 Command Byte

| P7 | P6 | P5 | P4 | P3 | P2 | P1 | P0 |
|------------------|----|----|----|----|-----------------|----|----|
| R/\overline{W} | 0 | 0 | 0 | 0 | Register Select | | |

Bit <7> Read/ \overline{Write} Bit. Tells the LM95172EWG if the host will be writing to, or reading from, the register to which this byte is pointing.

Bits <6:3> Not Used. **These Bits must be zero.** If an illegal address is written, the LM95172EWG will return 0000h on the subsequent read.

Bits <2:0> Pointer Address Bits. Points to desired register. See table below.

| P2 | P1 | P0 | Register |
|----|----|----|-------------------|
| 0 | 0 | 0 | Invalid. (Note 6) |
| 0 | 0 | 1 | Control/Status |
| 0 | 1 | 0 | T_{HIGH} |
| 0 | 1 | 1 | T_{LOW} |
| 1 | 0 | 0 | Invalid. (Note 6) |
| 1 | 0 | 1 | |
| 1 | 1 | 0 | |
| 1 | 1 | 1 | Identification |

Power-On Reset state: 00h

Reset Conditions: Upon Power-on Reset

1.7.2 Temperature Register

(Read Only): Default Register

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|------|-------|------|------|------|-----|-----|-----|
| Sign | 128°C | 64°C | 32°C | 16°C | 8°C | 4°C | 2°C |

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-------|--------|---------|----------|-----------|------------|-------------------------------------|
| 1°C | 0.5°C | 0.25°C | 0.125°C | 0.0625°C | 0.03125°C | 0.015625°C | Conversion - Toggle/ 0.0078125°C |

Bit <15:1>: Temperature Data Byte. Represents the temperature that was measured by the most recent temperature conversion in two's complement form. On power-up, this data is invalid until the DAV Bit in the Control/Status Register is high (that is, after completion of the first conversion).

The resolution is user-programmable from 13-Bit resolution (0.0625°C) through 16-Bit resolution (0.0078125°C). The desired resolution is programmed through Bits 4 and 5 of the Control/Status Register. See the description of the Control/Status Register for details on resolution selection.

The Bits not used for a selected resolution are always set to "0" and are not to be considered part of a valid temperature reading. For example, for 14-Bit resolution, Bit <1> is not used and, therefore, it is invalid and is always zero.

Bit <0>: Conversion Toggle or, if 16-Bit resolution has been selected, this is the 16-Bit temperature LSB.

When in 13-Bit, 14-Bit, or 15-Bit resolution mode, this Bit toggles each time the Temperature register is read if a conversion has completed since the last read. If conversion has not completed, the value will be the same as the last read.

When in 16-Bit resolution mode, this is the Least Significant Bit of the temperature data.

Reset Conditions: See Sections 1.1.1 through 1.1.3 for reset conditions.

One-Shot State: 8000h (-256°C)

1.7.3 Control/Status Register

(Read/Write) Pointer Address: 81h (Read); 01h (Write)

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|----------|---------------------------------------|----------------------|--|-------------------|------------------|-----|
| SD | One-Shot | $\overline{\text{OVERTEMP}}$ Reset | Conversion Toggle | $\overline{\text{OVERTEMP}}$ Status | T_{HIGH} | T_{LOW} | DAV |

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|---|-------------------------------------|------|------|----|----------|----------|----|
| $\overline{\text{OVERTEMP}}$ Disable | $\overline{\text{OVERTEMP}}$ POL | RES1 | RES0 | 0 | reserved | reserved | 0 |

Bit <15>: Shutdown (SD) Bit. Writing a "1" to this bit and holding it high for at least the specified maximum conversion time, at the existing temperature resolution setting, enables the Shutdown Mode. Writing a "0" to this bit restores the LM95172EWG to normal mode.

Bit <14>: One-Shot Bit. When in shutdown mode (Bit <15> is "1"), initiates a single temperature conversion and update of the temperature register with new temperature data. Has no effect when in continuous conversion mode (i.e., when Bit <15> is "0"). Always returns a "0" when read.

Bit <13>: $\overline{\text{OVERTEMP}}$ Reset Bit. Writing a "1" to this Bit resets the $\overline{\text{OVERTEMP}}$ Status bit and, after a possible wait up to one temperature conversion time, the $\overline{\text{OVERTEMP}}$ pin. It will always return a "0" when read.

Bit <12>: Conversion Toggle Bit. Toggles each time the Control/Status register is read if a conversion has completed since the last read. If conversion has not been completed, the value will be the same as last read.

Bit <11>: $\overline{\text{OVERTEMP}}$ Status Bit. This Bit is "0" when $\overline{\text{OVERTEMP}}$ output is low and "1" when $\overline{\text{OVERTEMP}}$ output is high. The $\overline{\text{OVERTEMP}}$ output is reset under the following conditions: (1) Cleared by writing a "1" to the $\overline{\text{OVERTEMP}}$ Reset Bit (Bit <13>) in this register or (2) Measured temperature falls below the T_{LOW} limit. If the temperature is still above T_{HIGH} , and $\overline{\text{OVERTEMP}}$ Reset is set to "1", then the Bit and the pin clear until the next conversion, at which point the Bit and pin would assert again.

Bit <10>: Temperature High (T_{HIGH}) Flag Bit. This Bit is set to "1" when the measured temperature exceeds the T_{HIGH} limit stored in the programmable T_{HIGH} register. The flag is reset to "0" when both of two conditions are met: (1) temperature no longer exceeds the programmed T_{HIGH} limit **and** (2) upon reading the Control/Status Register. If the temperature no longer exceeds the T_{HIGH} limit, the status Bit remains set until it is read by the master so that the system can check the history of what caused the $\overline{\text{OVERTEMP}}$ to assert.

Bit <9>: Temperature Low (T_{LOW}) Flag Bit. This Bit is set to "1" when the measured temperature falls below the T_{LOW} limit stored in the programmable T_{LOW} register. The flag is reset to "0" when both of two conditions are met: (1) temperature is no longer below the programmed T_{LOW} limit **and** (2) upon reading the Control/Status Register. If the temperature is no longer below, or equal to, the T_{LOW} limit, the status Bit remains set until it is read by the master so that the system can check the history of what caused the $\overline{\text{OVERTEMP}}$ to assert.

Bit <8>: Data Available (DAV) Status Bit. This Bit is "0" when the temperature sensor is in the process of converting a new temperature. It is "1" when the conversion is done. It is reset after each read and goes high again after one temperature conversion is done. In one-shot mode: after initiating a temperature conversion while operating, this status Bit can be monitored to indicate when the conversion is done. After triggering the one-shot conversion, the data in the temperature register is invalid until this Bit is high (i.e., after completion of the first conversion).

Bit <7>: $\overline{\text{OVERTEMP}}$ Disable Bit. When set to "0" the $\overline{\text{OVERTEMP}}$ output is enabled. When set to "1" the $\overline{\text{OVERTEMP}}$ output is disabled. This Bit also controls the $\overline{\text{OVERTEMP}}$ Status Bit (this register, Bit <11>) since that Bit reflects the state of the $\overline{\text{OVERTEMP}}$ pin.

Bit <6>: $\overline{\text{OVERTEMP}}$ Polarity Bit. When set to "1", $\overline{\text{OVERTEMP}}$ is active-high. When "0" it is active-low.

Control/Status Register (Continued)

Bit <5:4>: Temperature Resolution Bits. Selects one of four user-programmable temperature data resolutions as indicated in the following table.

| Control/Status Register | | Resolution | |
|-------------------------|-------|------------|-----------|
| Bit 5 | Bit 4 | Bits | °C |
| 0 | 0 | 13 | 0.0625 |
| 0 | 1 | 14 | 0.03125 |
| 1 | 0 | 15 | 0.015625 |
| 1 | 1 | 16 | 0.0078125 |

Bit <3>: Always write a zero to this Bit.

Bit <2:1>: Reserved Bits. Will return whatever was last written to them. Value is zero on power-up.

Bit <0>: Always write a zero to this Bit.

Reset State: 0000h

Reset Conditions: Upon Power-on Reset.

1.7.4 T_{HIGH}: Upper Limit Register

(Read/Write) Pointer Address: 82h (Read); 02h (Write)

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|------|-------|------|------|------|-----|-----|-----|
| Sign | 128°C | 64°C | 32°C | 16°C | 8°C | 4°C | 2°C |

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-------|--------|----------|----|----|----|----|
| 1°C | 0.5°C | 0.25°C | Reserved | | | | |

Bit <15:5>: Upper-Limit Temperature byte. If the measured temperature, stored in the temperature register, exceeds this user-programmable temperature limit, the $\overline{\text{OVERTEMP}}$ pin will assert and the T_{HIGH} flag in the Control/Status register will be set to "1".

Bit <4:0>: Reserved. Returns all zeroes when read.

Reset State: 4880h (+145°C)

Reset Conditions: Upon Power-on Reset.

1.7.5 T_{LOW}: Lower Limit Register

(Read/Write) Pointer Address: 83h (Read); 03h (Write)

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|------|-------|------|------|------|-----|-----|-----|
| Sign | 128°C | 64°C | 32°C | 16°C | 8°C | 4°C | 2°C |

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-------|--------|----------|----|----|----|----|
| 1°C | 0.5°C | 0.25°C | Reserved | | | | |

Bit <15:5>: Lower-Limit Temperature byte. If the measured temperature that is stored in the temperature register falls below this user-programmable temperature limit, the $\overline{\text{OVERTEMP}}$ pin will not assert and the T_{LOW} flag in the Control/Status register will be set to "1".

Bit <4:0>: Reserved. Returns all zeroes when read.

Reset State: 4600h (+140°C)

Reset Conditions: Upon Power-on Reset.

1.7.6 MFGID: Manufacturer, Product, and Step ID Register

(Read Only) Pointer Address: 87h

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 |
|-----|-----|-----|-----|-----|-----|----|----|
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|----|----|----|----|----|----|----|----|
| 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 |

Bit <15:8>: Manufacturer Identification Byte. Always returns 80h to uniquely identify the manufacturer as National Semiconductor Corporation.


Bit <7:4>: Product Identification Nibble. Always returns 30h to uniquely identify this part as the LM95172EWG.

Bit <3:0>: Die Revision Nibble. Returns 0h to uniquely identify the revision level as zero.

Reset State: 8030h


Reset Conditions: Upon Power-on Reset.

2.0 Typical Applications

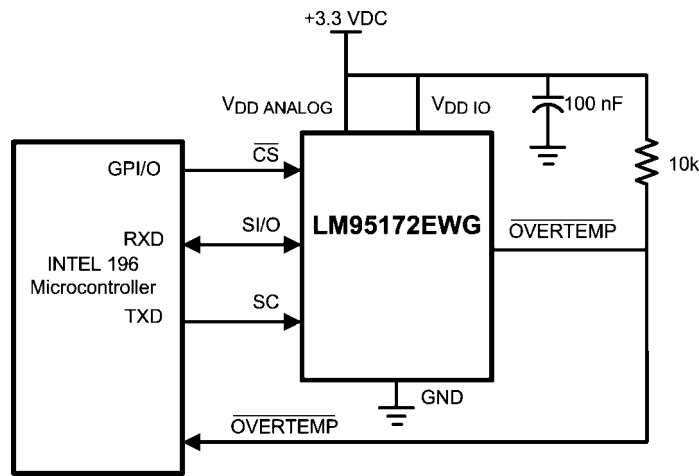

30076620





FIGURE 13. Temperature monitor using Intel 196 processor

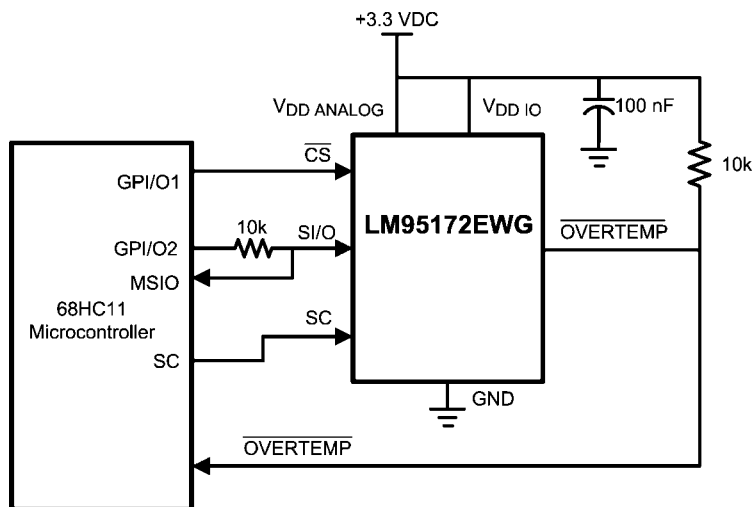

30076619

FIGURE 14. LM95172EWG digital input control using microcontroller's general purpose I/O.

Physical Dimensions inches (millimeters) unless otherwise noted

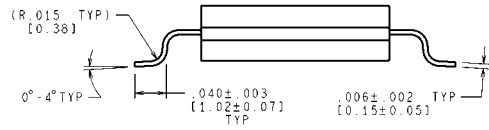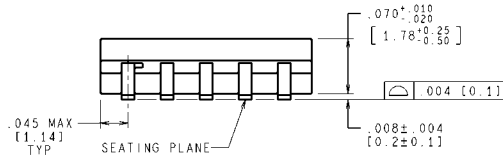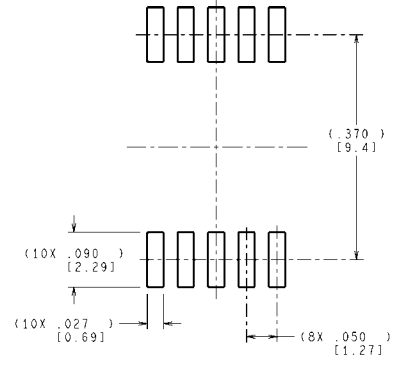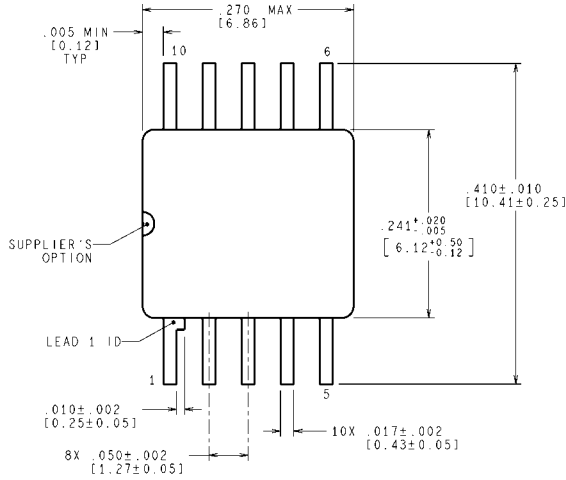

ML-PRF-38535
 CONFIGURATION CONTROL

CONTROLLING DIMENSION IS INCH
 VALUES IN [] ARE MILLIMETERS
 DIMENSIONS IN () FOR REFERENCE ONLY

WG10A (Rev F)

**10-pin Cerpack Package
 LM95172EWG**

Notes

LM95172

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

| Products | | Design Support | |
|--------------------------------|--|------------------------------|--|
| Amplifiers | www.national.com/amplifiers | WEBENCH® Tools | www.national.com/webench |
| Audio | www.national.com/audio | App Notes | www.national.com/appnotes |
| Clock and Timing | www.national.com/timing | Reference Designs | www.national.com/refdesigns |
| Data Converters | www.national.com/adc | Samples | www.national.com/samples |
| Interface | www.national.com/interface | Eval Boards | www.national.com/evalboards |
| LVDS | www.national.com/lvds | Packaging | www.national.com/packaging |
| Power Management | www.national.com/power | Green Compliance | www.national.com/quality/green |
| Switching Regulators | www.national.com/switchers | Distributors | www.national.com/contacts |
| LDOs | www.national.com/ldo | Quality and Reliability | www.national.com/quality |
| LED Lighting | www.national.com/led | Feedback/Support | www.national.com/feedback |
| Voltage References | www.national.com/vref | Design Made Easy | www.national.com/easy |
| PowerWise® Solutions | www.national.com/powerwise | Applications & Markets | www.national.com/solutions |
| Serial Digital Interface (SDI) | www.national.com/sdi | Mil/Aero | www.national.com/milaero |
| Temperature Sensors | www.national.com/tempensors | SolarMagic™ | www.national.com/solarmagic |
| PLL/VCO | www.national.com/wireless | PowerWise® Design University | www.national.com/training |

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com