
Technical Data Sheet


STRAIGHT MALE RECEPTACLE FOR PCB SMT TYPE EDGE-CARD - SMOOTH BORE

Radiall 🚺



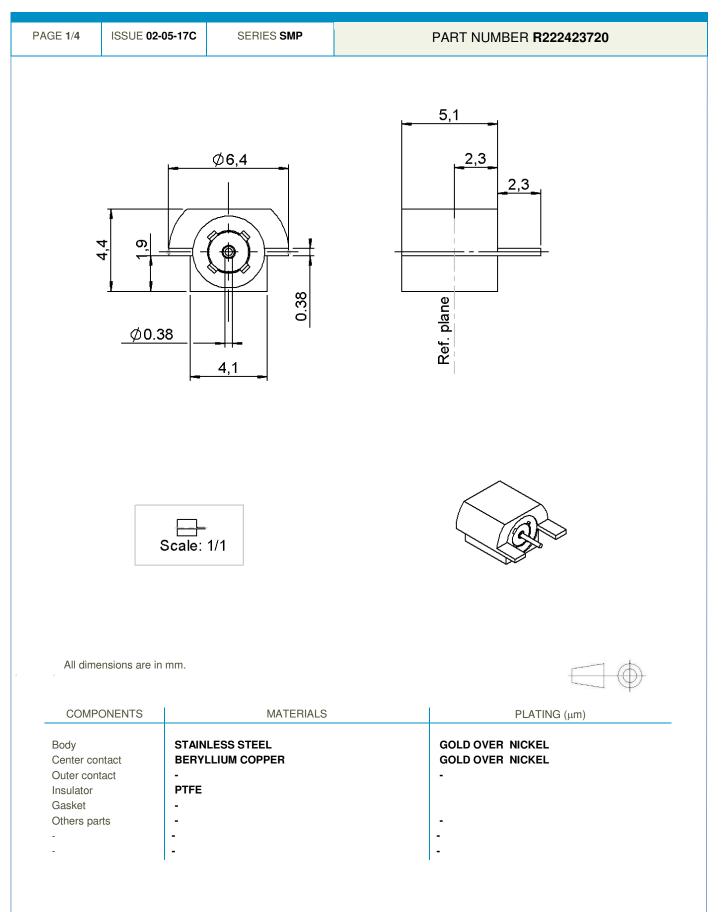

STRAIGHT MALE RECEPTACLE FOR PCB SMT TYPE EDGE-CARD - SMOOTH BORE

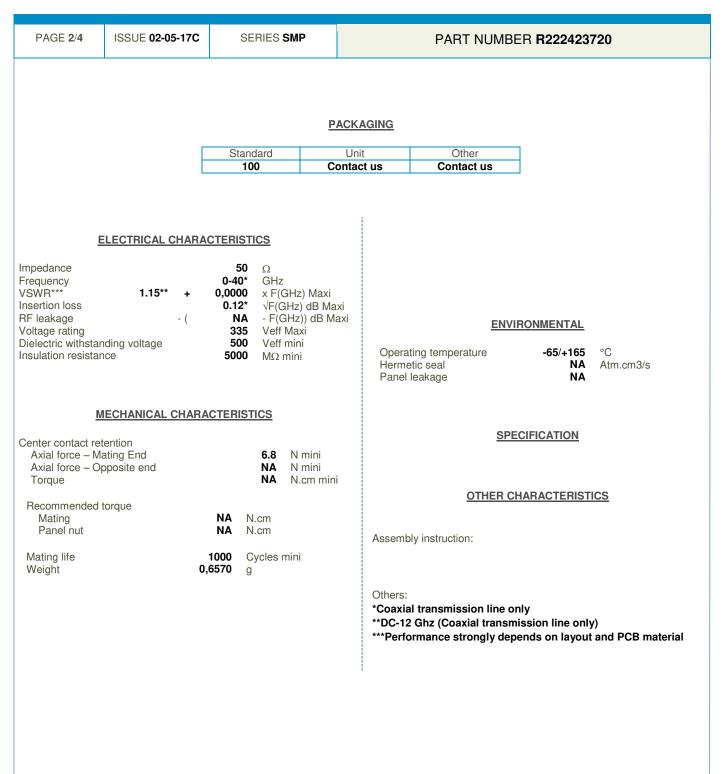

Radiall 🚺



STRAIGHT MALE RECEPTACLE FOR PCB SMT TYPE EDGE-CARD - SMOOTH BORE

PAGE 3 /4	ISSUE 02-05-17C


SERIES SMP

PART NUMBER R222423720

SOLDER PROCEDURE

- Deposition of solder paste 'Sn Ag4 Cu0.5' on mounting zone by screen printing application. We recommend a low residue flux. We advise a thickness of 150 microns (.5.9 microinch). Verify that the edges of the zone are clean.
- Placement of the receptacle on the mounting zone with an automatic machine of 'pick and place' type.
 Video camera is recommended for the positioning of the component. Adhesive agents must not be used on the receptacle.
- 3. Soldering by infra-red reflow. Below, please find the typical profile to use.
- 4. Cleaning of printed circuit boards.
- 5. Checking of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

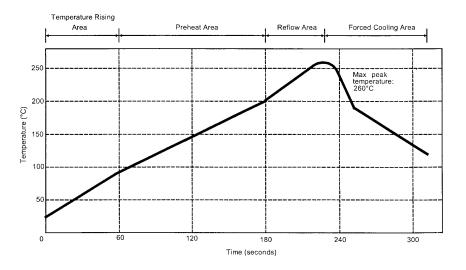

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Technical Data Sheet

STRAIGHT MALE RECEPTACLE FOR PCB SMT TYPE EDGE-CARD - SMOOTH BORE

Radiall 🚺

