



**ALPHA & OMEGA**  
SEMICONDUCTOR

**AO9926B**

**20V Dual N-Channel MOSFET**

### General Description



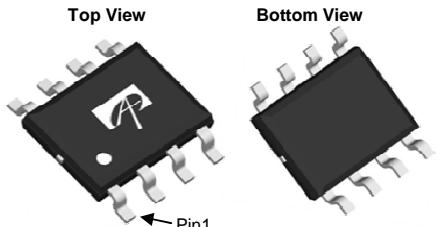
The AO9926B uses advanced trench technology to provide excellent  $R_{DS(ON)}$ , low gate charge and operation with gate voltages as low as 1.8V while retaining a 12V  $V_{GS(MAX)}$  rating. This device is suitable for use as a uni-directional or bi-directional load switch.

### Product Summary

$V_{DS}$	20V
$I_D$ (at $V_{GS}=10V$ )	7.6A
$R_{DS(ON)}$ (at $V_{GS}=10V$ )	< 23mΩ
$R_{DS(ON)}$ (at $V_{GS}=4.5V$ )	< 26mΩ
$R_{DS(ON)}$ (at $V_{GS}=2.5V$ )	< 34mΩ
$R_{DS(ON)}$ (at $V_{GS}=1.8V$ )	< 52mΩ



SOIC-8



### Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Drain-Source Voltage	$V_{DS}$	20	V
Gate-Source Voltage	$V_{GS}$	$\pm 12$	V
Continuous Drain Current	$I_D$	7.6	A
$T_A=70^\circ\text{C}$		6.1	
Pulsed Drain Current <sup>C</sup>	$I_{DM}$	38	
Power Dissipation <sup>B</sup>	$P_D$	2	W
$T_A=70^\circ\text{C}$		1.28	
Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 150	°C

### Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient <sup>A</sup>	$R_{\theta JA}$	48	62.5	°C/W
Maximum Junction-to-Ambient <sup>A,D</sup>		74	90	°C/W
Maximum Junction-to-Lead	$R_{\theta JL}$	32	40	°C/W

**Electrical Characteristics ( $T_J=25^\circ\text{C}$  unless otherwise noted)**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>STATIC PARAMETERS</b>						
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	20			V
$I_{\text{DSS}}$	Zero Gate Voltage Drain Current	$V_{DS}=20\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 12\text{V}$			$\pm 100$	nA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	0.4	0.75	1.1	V
$I_{\text{D(ON)}}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	38			A
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=7.6\text{A}$ $T_J=125^\circ\text{C}$		16.5 25	23	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=7\text{A}$		18.5	26	$\text{m}\Omega$
		$V_{GS}=2.5\text{V}, I_D=6\text{A}$		24	34	$\text{m}\Omega$
		$V_{GS}=1.8\text{V}, I_D=2\text{A}$		32	52	$\text{m}\Omega$
$g_{\text{FS}}$	Forward Transconductance	$V_{DS}=5\text{V}, I_D=7.6\text{A}$		25		S
$V_{\text{SD}}$	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.7	1	V
$I_S$	Maximum Body-Diode Continuous Current				2.5	A
<b>DYNAMIC PARAMETERS</b>						
$C_{\text{iss}}$	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=15\text{V}, f=1\text{MHz}$	420	525	630	pF
$C_{\text{oss}}$	Output Capacitance		65	95	125	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance		45	75	105	pF
$R_g$	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	0.8	1.7	2.6	$\Omega$
<b>SWITCHING PARAMETERS</b>						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, I_D=7.6\text{A}$		12.5		nC
$Q_g(4.5\text{V})$	Total Gate Charge			6		nC
$Q_{\text{gs}}$	Gate Source Charge			1		nC
$Q_{\text{gd}}$	Gate Drain Charge			2		nC
$t_{\text{D(on)}}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, R_L=1.3\Omega, R_{\text{GEN}}=3\Omega$		3		ns
$t_r$	Turn-On Rise Time			7.5		ns
$t_{\text{D(off)}}$	Turn-Off Delay Time			20		ns
$t_f$	Turn-Off Fall Time			6		ns
$t_{\text{rr}}$	Body Diode Reverse Recovery Time	$I_F=7.6\text{A}, dI/dt=100\text{A}/\mu\text{s}$		14		ns
$Q_{\text{rr}}$	Body Diode Reverse Recovery Charge	$I_F=7.6\text{A}, dI/dt=100\text{A}/\mu\text{s}$		6		nC

A. The value of  $R_{\text{gJA}}$  is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, in a still air environment with  $T_A=25^\circ\text{C}$ . The value in any given application depends on the user's specific board design.

B. The power dissipation  $P_D$  is based on  $T_{J(\text{MAX})}=150^\circ\text{C}$ , using  $\leq 10\text{s}$  junction-to-ambient thermal resistance.

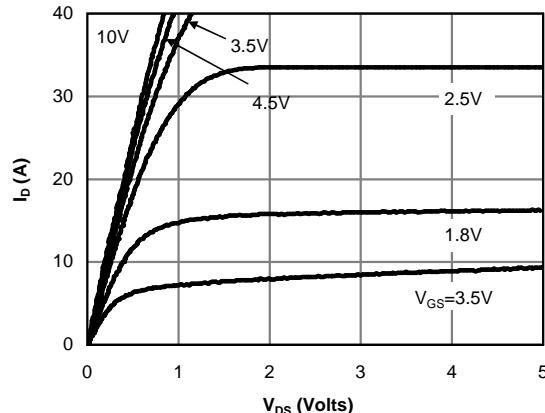
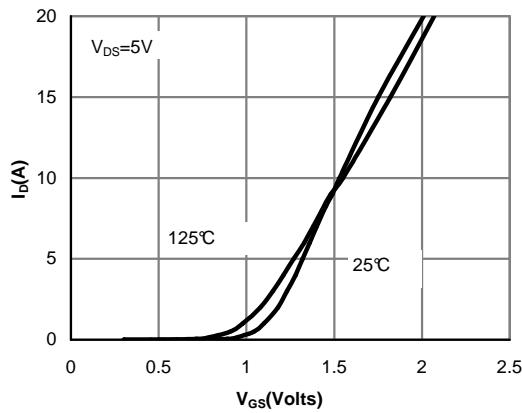
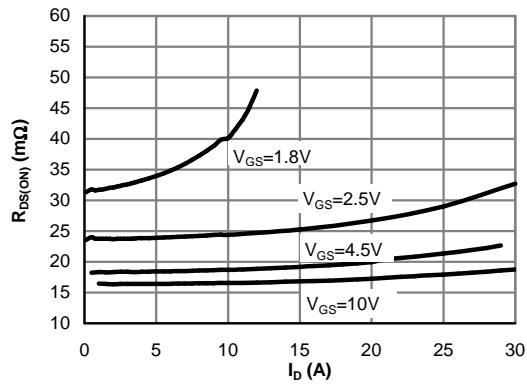
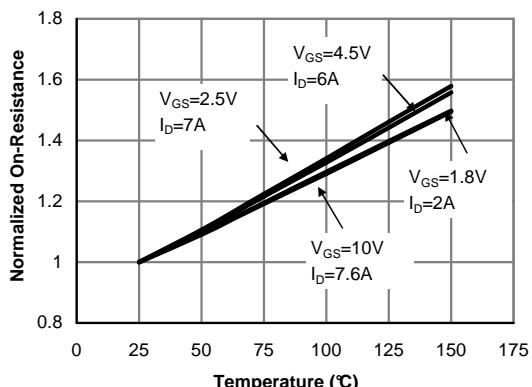
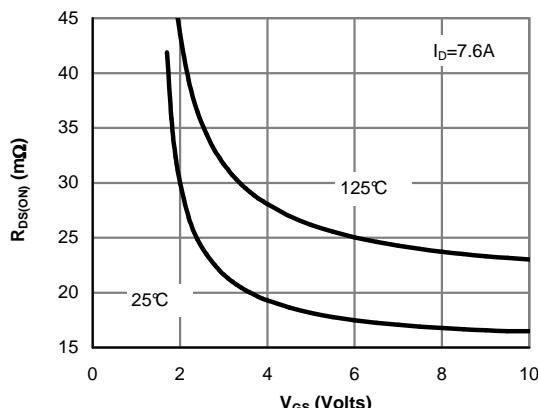
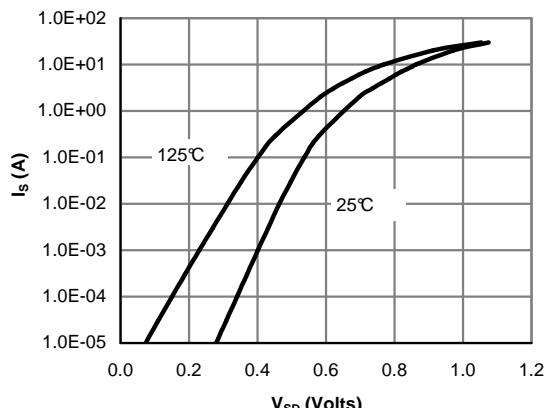
C. Repetitive rating, pulse width limited by junction temperature  $T_{J(\text{MAX})}=150^\circ\text{C}$ . Ratings are based on low frequency and duty cycles to keep initial  $T_J=25^\circ\text{C}$ .

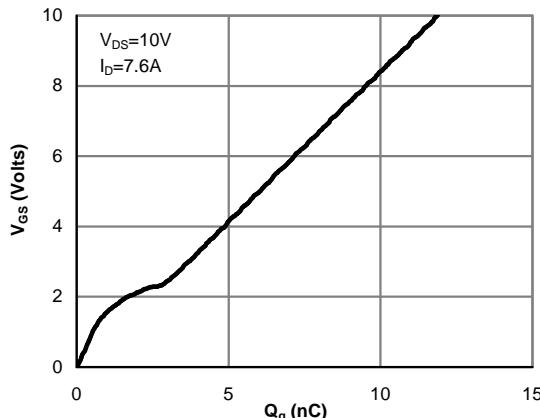
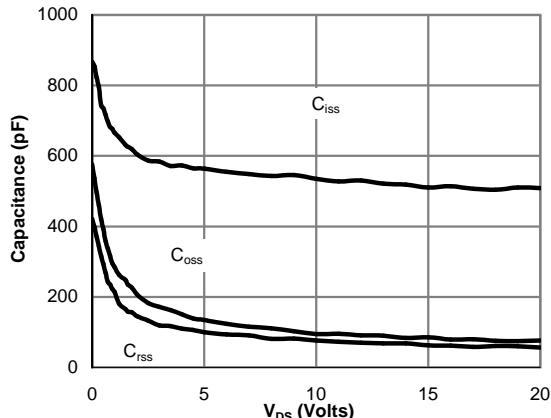
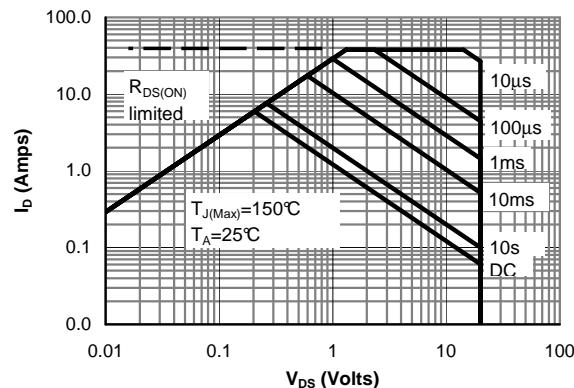
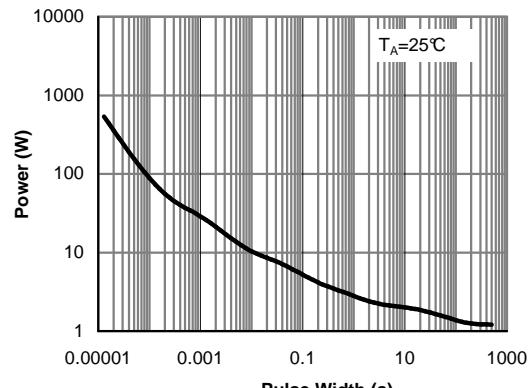
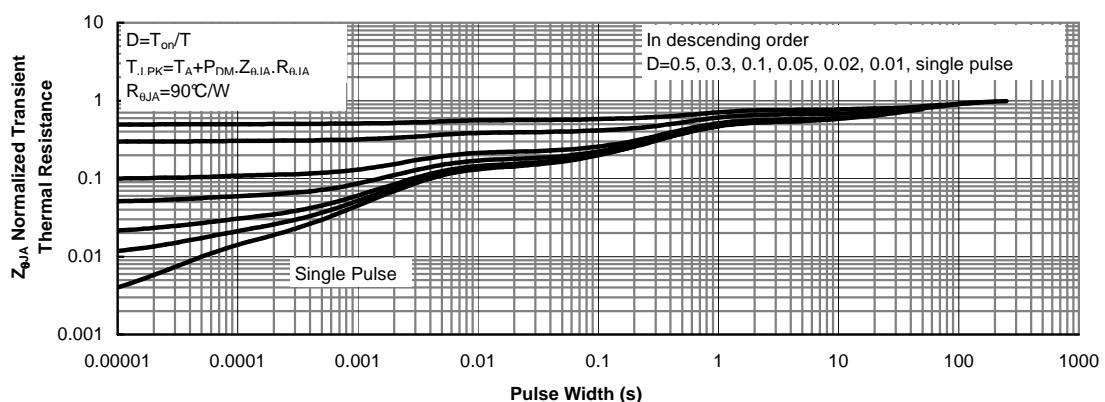
D. The  $R_{\text{gJA}}$  is the sum of the thermal impedance from junction to lead  $R_{\text{gUL}}$  and lead to ambient.

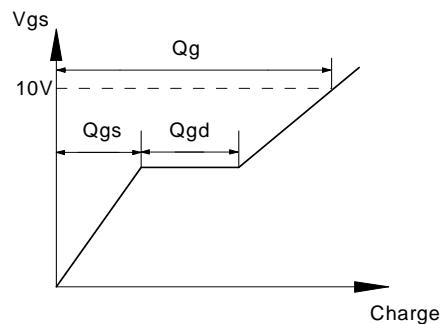
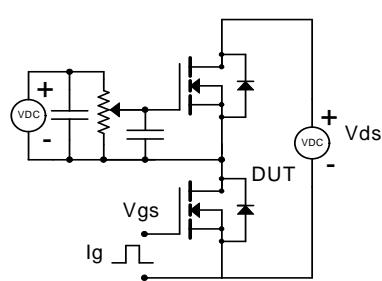
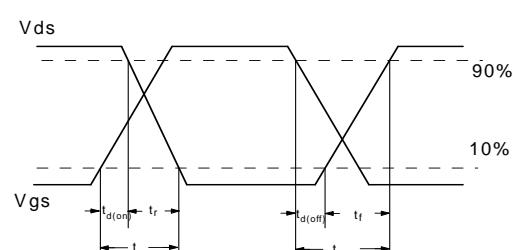
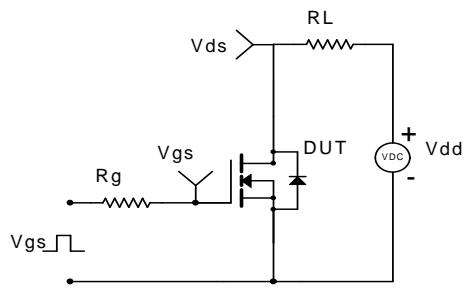
E. The static characteristics in Figures 1 to 6 are obtained using <300μs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-ambient thermal impedance which is measured with the device mounted on 1in<sup>2</sup> FR-4 board with 2oz. Copper, assuming a maximum junction temperature of  $T_{J(\text{MAX})}=150^\circ\text{C}$ . The SOA curve provides a single pulse rating.

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Fig 1: On-Region Characteristics (Note E)**

**Figure 2: Transfer Characteristics (Note E)**

**Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)**

**Figure 4: On-Resistance vs. Junction Temperature (Note E)**

**Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)**

**Figure 6: Body-Diode Characteristics (Note E)**

**TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS**

**Figure 7: Gate-Charge Characteristics**

**Figure 8: Capacitance Characteristics**

**Figure 9: Maximum Forward Biased Safe Operating Area (Note F)**

**Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)**

**Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)**

**Gate Charge Test Circuit & Waveform**

**Resistive Switching Test Circuit & Waveforms**

**Diode Recovery Test Circuit & Waveforms**
