

Serial to Fiber Converter | PSI-MOS-RS232/FO 850 E

 perle.com/products/serial-extendrs/psi-mos-rs232-fo850e-rs232-to-fiber.shtml

PSI-MOS-RS232/FO 850 E Serial to Fiber Converter

Connect RS232 devices to fiber optic cable

- Extend serial data up to 2.6 miles
- Immune to EMI, RFI and transient surges
- Point-to-point or star configuration
- ST type fiber connectors
- Configurable DB9 Male DTE / DCE RS232 Connector

The PSI-MOS-RS232/FO 850 E Serial to Fiber Converter transparently connects RS232 devices to fiber optic cable. By transmitting RS232 data over optical fiber, these serial media converters provide an economical path to extend the reach of serial devices.



Long Distance Serial Data Transmission over Fiber

RS232 Serial transmission is limited to 20 Kbps over a distance of only 15 meters (50 feet). Using the FO 850 E Serial to Fiber Converter you can extend your serial data transmission up to 4.2km (2.6 miles). The result is that any two pieces of asynchronous serial equipment, located miles apart, can communicate at half or full duplex over fiber optic cable at rates up to 115.2 kbps.

EMI, RFI and Transient Surge Immunity

Another advantage of the FO 850 E fiber optic transmission system is the electrically isolated connection of devices. Electromagnetic interference (EMI) is a common phenomenon in typical environments like industrial plants, warehouses and factory floors. This interference can cause corruption of data over RS232 or copper-based Ethernet links. Data transmitted over fiber optic cable however is completely immune to this type of noise, thus preventing the negative effects of voltage equalization currents and electromagnetic interference on the data cables. A Serial to Fiber Media Converter therefore enables you to inter-connect your serial devices over fiber ensuring optimal data transmission, increased availability of the system, and improved network design flexibility for point-to-point connections and star structures.

Flexible Fiber Optic Connections

The FO 850 E operates at 850 nm wavelength, using a separate LED emitter and photo-detector on ST type connectors. Almost any multimode glass fiber size can be used including 50/125 m, 62.5/125 m, and 200/230 m.

Power Budget Considerations

Calculating the power budget is critically important with planning the fiber optic link. The optical power budget is the amount of light required to transmit data successfully over distance through a fiber-optic connection. The amount of light energy available within the setup will dictate the length of the fiber optic cable run between serial media converters within the network. Optical power budgets are critical to help businesses avoid signal distortion. To learn how to calculate optical power budget read our technical note. Transmit and receive dBm can be found in the Hardware specifications.


Transmit each serial signal out over 10 fiber optic lines

Up to ten (10) Serial to Fiber Converters can be grouped together using the TBUS DIN Rail bus system for voltage and data. This allows the serial converter to operate as a star coupler, taking the serial data input signal and distributing it to all Fiber optic output ports.

High Quality Features and Support

The FO 850 E are also equipped with comprehensive diagnostic functions to increase system availability, simplify start-up and permanently monitor the optical transmission quality. This allows for more efficient troubleshooting and less on-site maintenance. These cost and time saving features, along with free worldwide technical support, make the FO 850 E RS232 serial to fiber converter the smart choice for IT professionals.

- Connections can be plugged in using a COMBICON screw terminal block
- Supply voltage and data signals routed through via DIN rail connectors
- High-quality electrical isolation between all interfaces (RS-232, fiber optic ports, power supply, DIN rail connector)
- Redundant power supply possible by means of optional system power supply unit
- Approved for use in zone 2
- Intrinsically safe fiber optic interface (Ex op is) for direct connection to devices in zone 1
- Integrated optical diagnostics for continuous monitoring of fiber optic paths
- Floating switch contact for leading alarm generation in relation to critical fiber optic paths
- Automatic data rate detection for all data rates up to 115.2 kbps



PSI-MOS-RS232/FO 850 E Technical Specifications

Ambient conditions

Ambient temperature (operation) -20 °C ... 60 °C



Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	30 % ... 95 % (non-condensing)
Altitude	5000 m (For restrictions see manufacturer's declaration)
Degree of protection	IP20
Noise immunity	EN 61000-6-2:2005



RS-232



Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Type of test	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6
Test result	5g, 10-150 Hz, 2.5 h, in XYZ direction
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27
Test result	15g, 11 ms period, half-sine shock pulse
Shock	15g in all directions in acc. with IEC 60068-2-27
Noise emission	EN 55011
Noise immunity	EN 61000-6-2:2005
Free from substances that could impair the application of coating	according to P-VW 3.10.7 57 65 0 VW-AUDI-Seat central standard
Connection in acc. with standard	CUL
Standards/regulations	EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6
Vibration (operation)	In acc. with IEC 60068-2-6: 5g, 150 Hz
Conformance	CE-compliant

ATEX	II 3 G Ex nA nC IIC T4 Gc X II (2) G [Ex op is Gb] IIC (PTB 06 ATEX 2042 I II (2) D [Ex op is Db] IIIC (PTB 06 ATEX 2042
UL, USA/Canada	Class I, Zone 2, AEx nc IIC T5 Class I, zone 2, Ex nC nL IIC T5 X Class I, Div. 2, Groups A, B, C, D

Optical interface FO

Number of FO ports	1
Transmit capacity, minimum	-4.6 dBm (200/230 μ m) -17.6 dBm (50/125 μ m) -13.6 dBm (62,5/125 μ m)
Minimum receiver sensitivity	-33.2 dBm
Wavelength	850 nm
Transmission length incl. 3 dB system reserve	2800 m (with F-K 200/230 8 dB/km with quick connector) 4200 m (with F-G 50/125 2.5 dB/km) 4800 m (with F-G 62,5/125 3.0 dB/km)
Transmission medium	PCF fiber Multi-mode fiberglass
Transmission protocol	Transparent to protocol for RS-232 interface
Connection method	B-FOC (duplex ST®)

General

Transmission channels	2 (1/1), RxD, TxD, full duplex
Bit distortion, input	\pm 35 % (permitted)
Bit distortion, output	< 6.25 %
Electrical isolation	VCC // V.24 (RS-232)
Test voltage data interface/power supply	1.5 kVrms (50 Hz, 1 min.)
Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Noise emission	EN 55011

Net weight	221.1 g
Housing material	PA 6.6-FR
Color	green
MTBF	320 Years (Telcordia standard, 25°C temperature operating cycle (5 days a week, 8 hours a day) 48 Years (Telcordia standard, 40°C temperature operating cycle (5 days a week, 12 hours a day)
Conformance	CE-compliant
ATEX	II 3 G Ex nA nC IIC T4 Gc X (Please follow the installation instructions in the documentation!) II (2) G [Ex op is Gb] IIC (PTB 06 ATEX 2042) follow the special installation instructions in the documentation!) II (2) D [Ex op is Db] IIIC (PTB 06 ATEX 2042) follow the special installation instructions in the documentation!)
UL, USA/Canada	Class I, Zone 2, AEx nc IIC T5 Class I, zone 2, Ex nC nL IIC T5 X Class I, Div. 2, Groups A, B, C, D
Digital outputs	
Output name	Relay output
Output description	Alarm output
Number of outputs	1
Maximum switching voltage	60 V DC 42 V AC
Limiting continuous current	0.46 A
Power supply	
Nominal supply voltage	24 V DC (With UL approval)
Supply voltage range	18 V DC ... 30 V DC


Max. current consumption	120 mA
Typical current consumption	120 mA (24 V DC)
Connection method	COMBICON plug-in screw terminal block

Serial interface

Interface 1	V.24 (RS-232) interface in acc. with ITU-T V.24, V.28, V.29, V.30, V.32, V.35, V.36, V.38, V.39, V.42, V.43, V.44, V.45, V.46, V.47, V.48, V.49, V.50, V.51, V.52, V.53, V.54, V.55, V.56, V.57, V.58, V.59, V.60, V.61, V.62, V.63, V.64, V.65, V.66, V.67, V.68, V.69, V.70, V.71, V.72, V.73, V.74, V.75, V.76, V.77, V.78, V.79, V.80, V.81, V.82, V.83, V.84, V.85, V.86, V.87, V.88, V.89, V.90, V.91, V.92, V.93, V.94, V.95, V.96, V.97, V.98, V.99, V.100, V.101, V.102, V.103, V.104, V.105, V.106, V.107, V.108, V.109, V.110, V.111, V.112, V.113, V.114, V.115, V.116, V.117, V.118, V.119, V.120, V.121, V.122, V.123, V.124, V.125, V.126, V.127, V.128, V.129, V.130, V.131, V.132, V.133, V.134, V.135, V.136, V.137, V.138, V.139, V.140, V.141, V.142, V.143, V.144, V.145, V.146, V.147, V.148, V.149, V.150, V.151, V.152, V.153, V.154, V.155, V.156, V.157, V.158, V.159, V.160, V.161, V.162, V.163, V.164, V.165, V.166, V.167, V.168, V.169, V.170, V.171, V.172, V.173, V.174, V.175, V.176, V.177, V.178, V.179, V.180, V.181, V.182, V.183, V.184, V.185, V.186, V.187, V.188, V.189, V.190, V.191, V.192, V.193, V.194, V.195, V.196, V.197, V.198, V.199, V.200, V.201, V.202, V.203, V.204, V.205, V.206, V.207, V.208, V.209, V.210, V.211, V.212, V.213, V.214, V.215, V.216, V.217, V.218, V.219, V.220, V.221, V.222, V.223, V.224, V.225, V.226, V.227, V.228, V.229, V.230, V.231, V.232, V.233, V.234, V.235, V.236, V.237, V.238, V.239, V.240, V.241, V.242, V.243, V.244, V.245, V.246, V.247, V.248, V.249, V.250, V.251, V.252, V.253, V.254, V.255, V.256, V.257, V.258, V.259, V.260, V.261, V.262, V.263, V.264, V.265, V.266, V.267, V.268, V.269, V.270, V.271, V.272, V.273, V.274, V.275, V.276, V.277, V.278, V.279, V.280, V.281, V.282, V.283, V.284, V.285, V.286, V.287, V.288, V.289, V.290, V.291, V.292, V.293, V.294, V.295, V.296, V.297, V.298, V.299, V.300, V.301, V.302, V.303, V.304, V.305, V.306, V.307, V.308, V.309, V.310, V.311, V.312, V.313, V.314, V.315, V.316, V.317, V.318, V.319, V.320, V.321, V.322, V.323, V.324, V.325, V.326, V.327, V.328, V.329, V.330, V.331, V.332, V.333, V.334, V.335, V.336, V.337, V.338, V.339, V.340, V.341, V.342, V.343, V.344, V.345, V.346, V.347, V.348, V.349, V.350, V.351, V.352, V.353, V.354, V.355, V.356, V.357, V.358, V.359, V.360, V.361, V.362, V.363, V.364, V.365, V.366, V.367, V.368, V.369, V.370, V.371, V.372, V.373, V.374, V.375, V.376, V.377, V.378, V.379, V.380, V.381, V.382, V.383, V.384, V.385, V.386, V.387, V.388, V.389, V.390, V.391, V.392, V.393, V.394, V.395, V.396, V.397, V.398, V.399, V.400, V.401, V.402, V.403, V.404, V.405, V.406, V.407, V.408, V.409, V.410, V.411, V.412, V.413, V.414, V.415, V.416, V.417, V.418, V.419, V.420, V.421, V.422, V.423, V.424, V.425, V.426, V.427, V.428, V.429, V.430, V.431, V.432, V.433, V.434, V.435, V.436, V.437, V.438, V.439, V.440, V.441, V.442, V.443, V.444, V.445, V.446, V.447, V.448, V.449, V.450, V.451, V.452, V.453, V.454, V.455, V.456, V.457, V.458, V.459, V.460, V.461, V.462, V.463, V.464, V.465, V.466, V.467, V.468, V.469, V.470, V.471, V.472, V.473, V.474, V.475, V.476, V.477, V.478, V.479, V.480, V.481, V.482, V.483, V.484, V.485, V.486, V.487, V.488, V.489, V.490, V.491, V.492, V.493, V.494, V.495, V.496, V.497, V.498, V.499, V.500, V.501, V.502, V.503, V.504, V.505, V.506, V.507, V.508, V.509, V.510, V.511, V.512, V.513, V.514, V.515, V.516, V.517, V.518, V.519, V.520, V.521, V.522, V.523, V.524, V.525, V.526, V.527, V.528, V.529, V.530, V.531, V.532, V.533, V.534, V.535, V.536, V.537, V.538, V.539, V.540, V.541, V.542, V.543, V.544, V.545, V.546, V.547, V.548, V.549, V.550, V.551, V.552, V.553, V.554, V.555, V.556, V.557, V.558, V.559, V.560, V.561, V.562, V.563, V.564, V.565, V.566, V.567, V.568, V.569, V.570, V.571, V.572, V.573, V.574, V.575, V.576, V.577, V.578, V.579, V.580, V.581, V.582, V.583, V.584, V.585, V.586, V.587, V.588, V.589, V.590, V.591, V.592, V.593, V.594, V.595, V.596, V.597, V.598, V.599, V.600, V.601, V.602, V.603, V.604, V.605, V.606, V.607, V.608, V.609, V.610, V.611, V.612, V.613, V.614, V.615, V.616, V.617, V.618, V.619, V.620, V.621, V.622, V.623, V.624, V.625, V.626, V.627, V.628, V.629, V.630, V.631, V.632, V.633, V.634, V.635, V.636, V.637, V.638, V.639, V.640, V.641, V.642, V.643, V.644, V.645, V.646, V.647, V.648, V.649, V.650, V.651, V.652, V.653, V.654, V.655, V.656, V.657, V.658, V.659, V.660, V.661, V.662, V.663, V.664, V.665, V.666, V.667, V.668, V.669, V.670, V.671, V.672, V.673, V.674, V.675, V.676, V.677, V.678, V.679, V.680, V.681, V.682, V.683, V.684, V.685, V.686, V.687, V.688, V.689, V.690, V.691, V.692, V.693, V.694, V.695, V.696, V.697, V.698, V.699, V.700, V.701, V.702, V.703, V.704, V.705, V.706, V.707, V.708, V.709, V.710, V.711, V.712, V.713, V.714, V.715, V.716, V.717, V.718, V.719, V.720, V.721, V.722, V.723, V.724, V.725, V.726, V.727, V.728, V.729, V.730, V.731, V.732, V.733, V.734, V.735, V.736, V.737, V.738, V.739, V.740, V.741, V.742, V.743, V.744, V.745, V.746, V.747, V.748, V.749, V.750, V.751, V.752, V.753, V.754, V.755, V.756, V.757, V.758, V.759, V.760, V.761, V.762, V.763, V.764, V.765, V.766, V.767, V.768, V.769, V.770, V.771, V.772, V.773, V.774, V.775, V.776, V.777, V.778, V.779, V.780, V.781, V.782, V.783, V.784, V.785, V.786, V.787, V.788, V.789, V.790, V.791, V.792, V.793, V.794, V.795, V.796, V.797, V.798, V.799, V.800, V.801, V.802, V.803, V.804, V.805, V.806, V.807, V.808, V.809, V.810, V.811, V.812, V.813, V.814, V.815, V.816, V.817, V.818, V.819, V.820, V.821, V.822, V.823, V.824, V.825, V.826, V.827, V.828, V.829, V.830, V.831, V.832, V.833, V.834, V.835, V.836, V.837, V.838, V.839, V.840, V.841, V.842, V.843, V.844, V.845, V.846, V.847, V.848, V.849, V.850, V.851, V.852, V.853, V.854, V.855, V.856, V.857, V.858, V.859, V.860, V.861, V.862, V.863, V.864, V.865, V.866, V.867, V.868, V.869, V.870, V.871, V.872, V.873, V.874, V.875, V.876, V.877, V.878, V.879, V.880, V.881, V.882, V.883, V.884, V.885, V.886, V.887, V.888, V.889, V.890, V.891, V.892, V.893, V.894, V.895, V.896, V.897, V.898, V.899, V.900, V.901, V.902, V.903, V.904, V.905, V.906, V.907, V.908, V.909, V.910, V.911, V.912, V.913, V.914, V.915, V.916, V.917, V.918, V.919, V.920, V.921, V.922, V.923, V.924, V.925, V.926, V.927, V.928, V.929, V.930, V.931, V.932, V.933, V.934, V.935, V.936, V.937, V.938, V.939, V.940, V.941, V.942, V.943, V.944, V.945, V.946, V.947, V.948, V.949, V.950, V.951, V.952, V.953, V.954, V.955, V.956, V.957, V.958, V.959, V.960, V.961, V.962, V.963, V.964, V.965, V.966, V.967, V.968, V.969, V.970, V.971, V.972, V.973, V.974, V.975, V.976, V.977, V.978, V.979, V.980, V.981, V.982, V.983, V.984, V.985, V.986, V.987, V.988, V.989, V.990, V.991, V.992, V.993, V.994, V.995, V.996, V.997, V.998, V.999, V.1000
Connection method	D-SUB 9 plug
Transmission medium	Copper
Transmission length	≤ 15 m
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section flexible max.	2.5 mm ²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	14
Serial transmission speed	115.2 kbps (NRZ)

Dimensions

Width	35 mm
Height	99 mm
Depth	105 mm

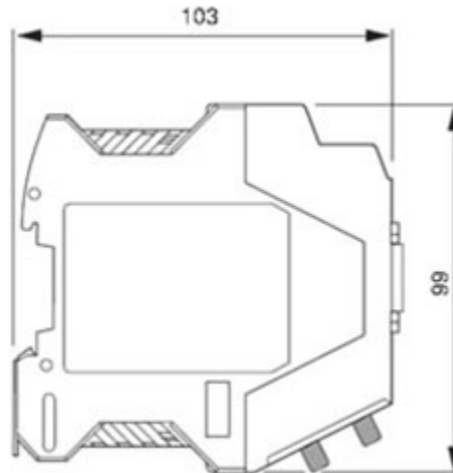

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
Reach and RoHS Compliant	Reach and RoHS Compliant

Approvals

cUL Listed
 cULus Listed
 UL Listed
 ATEX
 EAC
 DNV
 cUL Recognized
 cULus Recognized
 UL Recognized

Commercial data

Packing unit	1
Weight per piece	222.7 g
Country of origin	Germany
Warranty	1 Year

Classifications

eCl@ss 4.0	27230207
eCl@ss 4.1	27230207


eCl@ss 5.0	27230207
eCl@ss 5.1	27230207
eCl@ss 6.0	27230207
eCl@ss 7.0	27230207
eCl@ss 8.0	19179290
eCl@ss 9.0	19179290
ETIM 2.0	EC001423
ETIM 3.0	EC001423
ETIM 4.0	EC001423
ETIM 5.0	EC000310
ETIM 6.0	EC000310
UNSPSC 6.01	30211506
UNSPSC 7.0901	39121008
UNSPSC 11	39121008
UNSPSC 12.01	39121008
UNSPSC 13.2	43222604

PSI-MOS-RS232/FO 850 E Serial to Fiber Media Converter Applications

- near heavy electrical equipment
- in environments with electrical (EMI) or radio (RFI) interference
- in environments with transient surges
- in industrial plants, warehouses and factory floors
- enabling asynchronous serial equipment to communicate at half or full duplex, with rates up to 115.2 kbps, over optical fiber


Point-to-point connections between serial devices over fiber


You can use two PSI-MOS-RS232/FO 850 E Serial to Fiber Converters to easily convert a data link from copper cable to fiber optics.

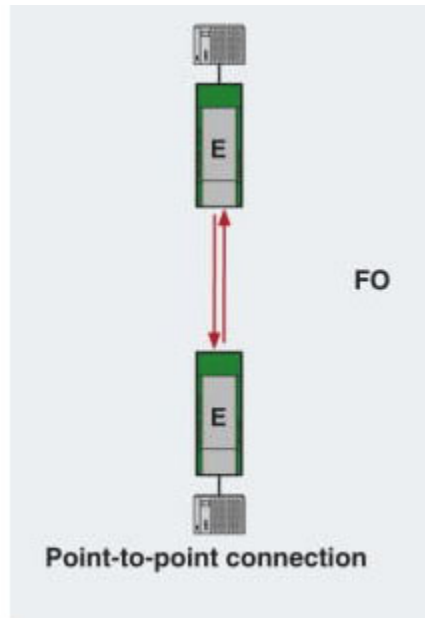



Star structures

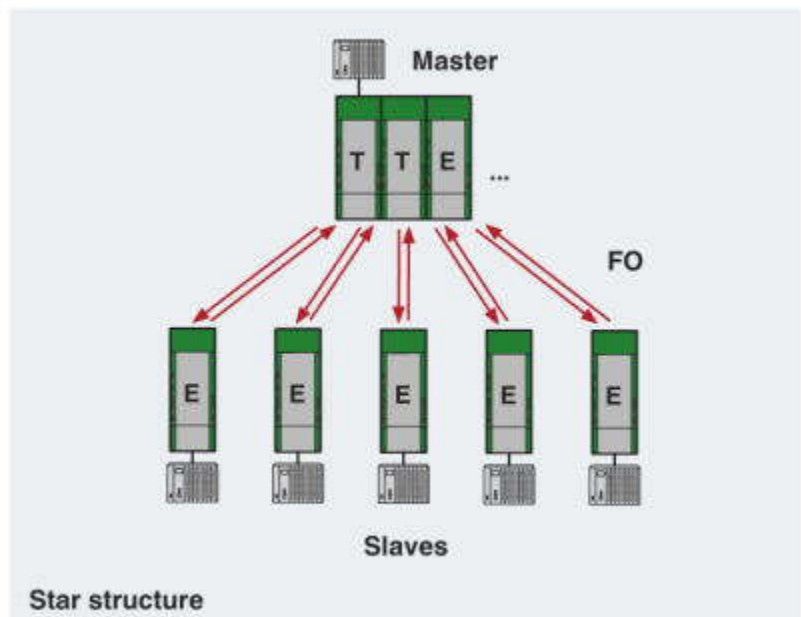You can network RS-232 devices within a star structure as a master/slave network. Depending on the number of star lines required, several PSI-MOS-RS232/FO 850 E Serial to Fiber Converters are connected to TBUS DIN Rail bus systems for voltage and data. This makes up to 10 fiber optic ports available. Cross-wiring for RS-232 data and for the supply voltage is provided automatically by the DIN rail connector.




Product Image	Description	Power Cord	Product Number
	PSI-MOS-RS232/FO 850 E - RS232 to fiber converter. DB9M serial to duplex fiber multimode 850nm (ST) [4.2km, 2.6 miles] - power supply optional	None	27083718
	PSI-MOS-RS232/FO 850 E - RS232 to fiber converter. DB9M serial to duplex fiber multimode 850nm (ST) [4.2km, 2.6 miles] – 24VDC USA wall power adapter included	USA	27083714
	PSI-MOS-RS232/FO 850 E - RS232 to fiber converter. DB9M serial to duplex fiber multimode 850nm (ST) [4.2km, 2.6 miles] – 24VDC UK wall power adapter included	UK	27083711
	PSI-MOS-RS232/FO 850 E - RS232 to fiber converter. DB9M serial to duplex fiber multimode 850nm (ST) [4.2km, 2.6 miles] – 24VDC EU wall power adapter included	EU	27083712

Accessories

Accessory Image	Description	Model Number	Accessory Number
Power Supply			
 NO IMAGE AVAILABLE	AC US WALL MOUNT ADAPT TL 24VDC , 18W wall power adapter, with tinned leads - 0 to 60C. For use with TC EXTENDER, PSI-MOS Converters, PSM-ME Isolator, PSM-ME Converter and PSM-ME Repeater	AC US WALL MOUNT ADAPT TL24VDC	2300234
 NO IMAGE AVAILABLE	AC UK WALL MOUNT ADAPT TL 24VDC , 18W wall power adapter with tinned leads - 0 to 60C. For use with TC EXTENDER, PSI-MOS Converters, PSM-ME Isolator, PSM-ME Converter and PSM-ME Repeater	AC UK WALL MOUNT ADAPT TL24VDC	2300235

Accessory Image	Description	Model Number	Accessory Number
 <p data-bbox="191 464 310 506">NO IMAGE AVAILABLE</p>	<p data-bbox="358 281 911 468">AC EU WALL MOUNT ADAPT TL 24VDC, 18W wall power adapter with tinned leads - 0 to 60C. For use with TC EXTENDER, PSI-MOS Converters, PSM-ME Isolator, PSM-ME Converter and PSM-ME Repeater</p>	<p data-bbox="964 281 1243 348">AC EU WALL MOUNT ADAPT TL24VDC</p>	<p data-bbox="1312 281 1425 306">2300236</p>
	<p data-bbox="358 598 911 741">UNO-PS/1AC/24DC/60W DIN-Rail Power Supply: 24 VDC, 60 Watt with universal 85 to 264 VAC, -25 to 70°C extended operating temperature.</p>	<p data-bbox="980 598 1227 705">UNO-PS/1AC/24DC/60W Power Supply</p>	<p data-bbox="1312 598 1433 623">29029928</p>
	<p data-bbox="358 949 911 1092">UNO-PS/1AC/24DC/150W Power Supply - DIN-Rail 24 VDC , 150 Watt power supply with universal 85 to 264 VAC, -25 to 70°C extended operating temperature</p>	<p data-bbox="980 949 1227 1056">UNO-PS/1AC/24DC/150W Power Supply</p>	<p data-bbox="1312 949 1433 974">29043768</p>
<p data-bbox="760 1318 862 1350">TBUS</p>			
	<p data-bbox="358 1411 911 1633">Transmit power voltage and data across the bus. Gold-plated contacts with 5 parallel positions. UL 8A / cUL 6A, 150 V. Width 17.5cm. Carton of 10. For use with PSI-MOS Serial to Fiber Converters and PSI-MODEM-SHDSL/SERIAL Copper Extenders.</p>	<p data-bbox="948 1411 1260 1518">ME 17,5 TBUS 1,5/ 5-ST-3,81 GN - TBUS DIN Rail Connector</p>	<p data-bbox="1312 1411 1433 1436">27095618</p>

Accessory Image	Description	Model Number	Accessory Number
	<p>Transmit power voltage across the bus. Gold-plated contacts with 2 parallel positions. UL 8A / cUL 6A, 150 V. Width 17.5cm. Carton of 10. For use with PSI-MOS Serial to Fiber Converters and PSI-MODEM-SHDSL/SERIAL Copper Extenders.</p>	<p>ME 17,5 TBUS 1,5/PP000-3,81 BK - TBUS DIN Rail Connector</p>	<p>28900148</p>