


V_{DS}	30	V
V_{gs} max	± 20	V
R_{DS(on)} max (@ V _{GS} = 10V)	4.9	mΩ
(@ V _{GS} = 4.5V)	6.8	
Q_g typ.	19.4	nC
I_D (@ T _{c(Bottom)} = 25°C)	25⑦	A

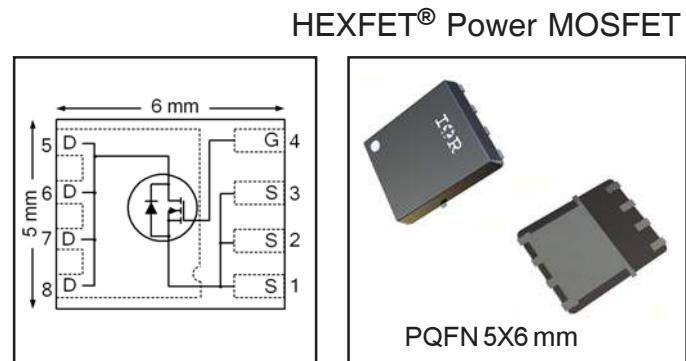

Applications

- Synchronous MOSFET for high frequency buck converters

Features

Low Thermal Resistance to PCB (< 2.3°C/W)
Low Profile (<1.2mm)
Industry-Standard Pinout
Compatible with Existing Surface Mount Techniques
RoHS Compliant Containing no Lead, no Bromide and no Halogen
MSL1, Consumer Qualification

Benefits

Enable better thermal dissipation
Increased Power Density
Multi-Vendor Compatibility
Easier Manufacturing
Environmentally Friendlier
Increased Reliability

Orderable part number	Package Type	Standard Pack		Note
		Form	Quantity	
IRFH8321TRPBF	PQFN 5mm x 6mm	Tape and Reel	4000	

Absolute Maximum Ratings

	Parameter	Max.	Units
V _{GS}	Gate-to-Source Voltage	± 20	V
I _D @ T _A = 25°C	Continuous Drain Current, V _{GS} @ 10V	21	A
I _D @ T _A = 70°C	Continuous Drain Current, V _{GS} @ 10V	17	
I _D @ T _{C(Bottom)} = 25°C	Continuous Drain Current, V _{GS} @ 10V	83⑥⑦	
I _D @ T _{C(Bottom)} = 100°C	Continuous Drain Current, V _{GS} @ 10V	52⑥⑦	
I _D @ T _C = 25°C	Continuous Drain Current, V _{GS} @ 10V (Source Bonding Technology Limited)	25⑦	
I _{DM}	Pulsed Drain Current ①	332	W
P _D @ T _A = 25°C	Power Dissipation ⑤	3.4	
P _D @ T _{C(Bottom)} = 25°C	Power Dissipation ⑤	54	
	Linear Derating Factor ⑤	0.027	W/°C
T _J T _{STG}	Operating Junction and Storage Temperature Range	-55 to + 150	°C

Notes ① through ⑦ are on page 9


Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	30	—	—	V	$V_{\text{GS}} = 0\text{V}$, $I_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	19.7	—	mV/ $^\circ\text{C}$	Reference to 25°C , $I_D = 1.0\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	3.9	4.9	$\text{m}\Omega$	$V_{\text{GS}} = 10\text{V}$, $I_D = 20\text{A}$ ③
		—	5.4	6.8		$V_{\text{GS}} = 4.5\text{V}$, $I_D = 16\text{A}$ ③
$V_{\text{GS(th)}}$	Gate Threshold Voltage	1.2	1.7	2.2	V	$V_{\text{DS}} = V_{\text{GS}}$, $I_D = 50\mu\text{A}$
$\Delta V_{\text{GS(th)}}$	Gate Threshold Voltage Coefficient	—	-6.4	—	mV/ $^\circ\text{C}$	
I_{DSS}	Drain-to-Source Leakage Current	—	—	1.0	μA	$V_{\text{DS}} = 24\text{V}$, $V_{\text{GS}} = 0\text{V}$
		—	—	150		$V_{\text{DS}} = 24\text{V}$, $V_{\text{GS}} = 0\text{V}$, $T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100		$V_{\text{GS}} = -20\text{V}$
g_{fs}	Forward Transconductance	68	—	—	S	$V_{\text{DS}} = 10\text{V}$, $I_D = 20\text{A}$
Q_g	Total Gate Charge	—	39	59	nC	$V_{\text{GS}} = 10\text{V}$, $V_{\text{DS}} = 15\text{V}$, $I_D = 20\text{A}$
Q_g	Total Gate Charge	—	19.4	29.1	nC	$V_{\text{DS}} = 15\text{V}$ $V_{\text{GS}} = 4.5\text{V}$ $I_D = 20\text{A}$
$Q_{\text{gs}1}$	Pre-V _{th} Gate-to-Source Charge	—	5.0	—		
$Q_{\text{gs}2}$	Post-V _{th} Gate-to-Source Charge	—	1.9	—		
Q_{gd}	Gate-to-Drain Charge	—	6.7	—		
Q_{godr}	Gate Charge Overdrive	—	5.8	—		
Q_{sw}	Switch Charge ($Q_{\text{gs}2} + Q_{\text{gd}}$)	—	8.6	—	nC	$V_{\text{DS}} = 16\text{V}$, $V_{\text{GS}} = 0\text{V}$
Q_{oss}	Output Charge	—	16.7	—		
R_G	Gate Resistance	—	0.9	2.7		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	14	—	ns	$V_{\text{DD}} = 15\text{V}$, $V_{\text{GS}} = 4.5\text{V}$ $I_D = 20\text{A}$ $R_G = 1.8\Omega$
t_r	Rise Time	—	20	—		
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	12	—		
t_f	Fall Time	—	6.8	—		
C_{iss}	Input Capacitance	—	2600	—	pF	$V_{\text{GS}} = 0\text{V}$ $V_{\text{DS}} = 10\text{V}$ $f = 1.0\text{MHz}$
C_{oss}	Output Capacitance	—	530	—		
C_{rss}	Reverse Transfer Capacitance	—	270	—		

Avalanche Characteristics







	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	93	mJ
I_{AR}	Avalanche Current ①	—	20	A

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_s	Continuous Source Current (Body Diode)	—	—	25⑦	A	MOSFET symbol showing the integral reverse p-n junction diode. 
I_{SM}	Pulsed Source Current (Body Diode) ①	—	—	332		
V_{SD}	Diode Forward Voltage	—	—	1.0	V	$T_J = 25^\circ\text{C}$, $I_s = 20\text{A}$, $V_{\text{GS}} = 0\text{V}$ ③
t_{rr}	Reverse Recovery Time	—	12	18	ns	$T_J = 25^\circ\text{C}$, $I_F = 20\text{A}$, $V_{\text{DD}} = 15\text{V}$
Q_{rr}	Reverse Recovery Charge	—	20	30	nC	$dI/dt = 500\text{ A}/\mu\text{s}$ ③
t_{on}	Forward Turn-On Time	Time is dominated by parasitic Inductance				

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\text{qJC}} \text{ (Bottom)}$	Junction-to-Case ④	—	2.3	$^\circ\text{C/W}$
$R_{\text{qJC}} \text{ (Top)}$	Junction-to-Case ④	—	31	
R_{qJA}	Junction-to-Ambient ⑤	—	37	
$R_{\text{qJA}} \text{ (<10s)}$	Junction-to-Ambient ⑤	—	25	

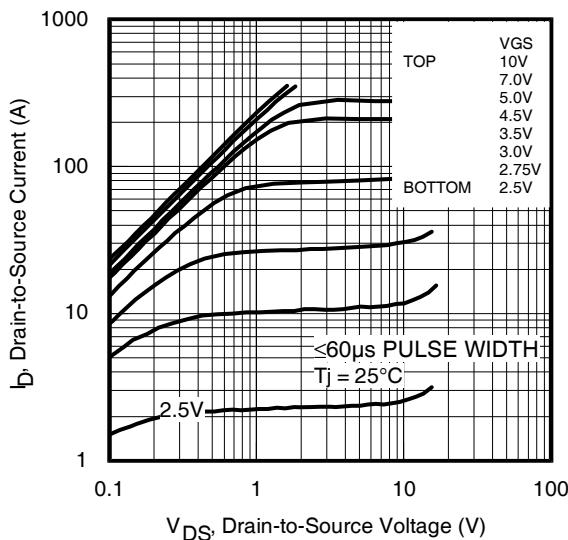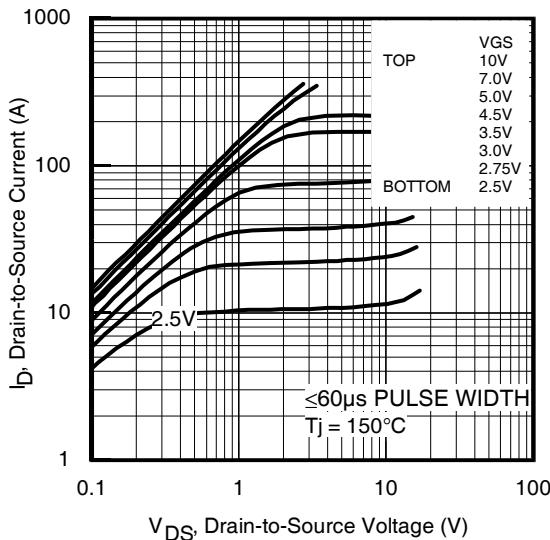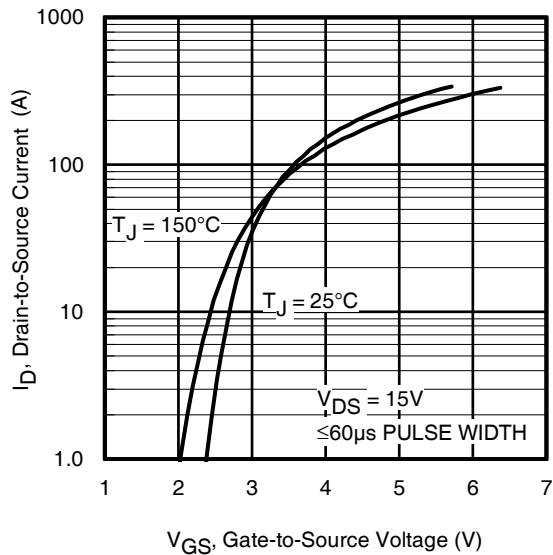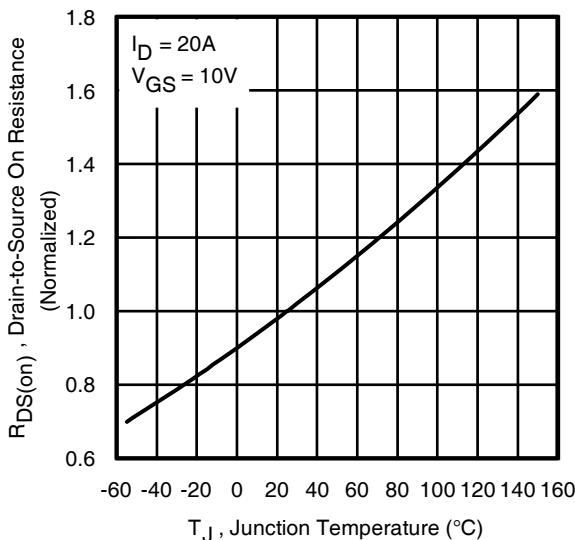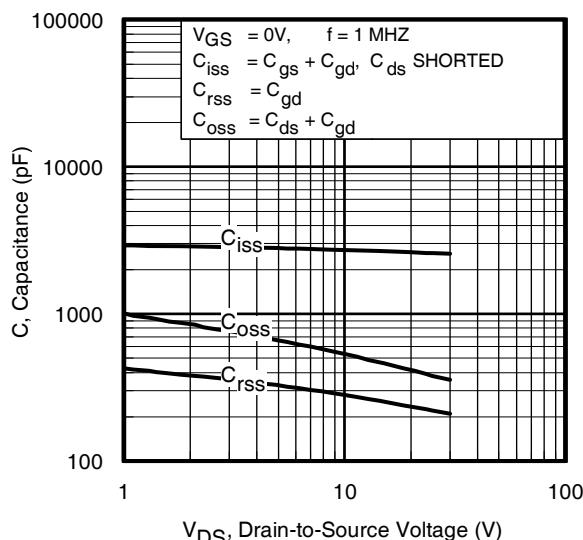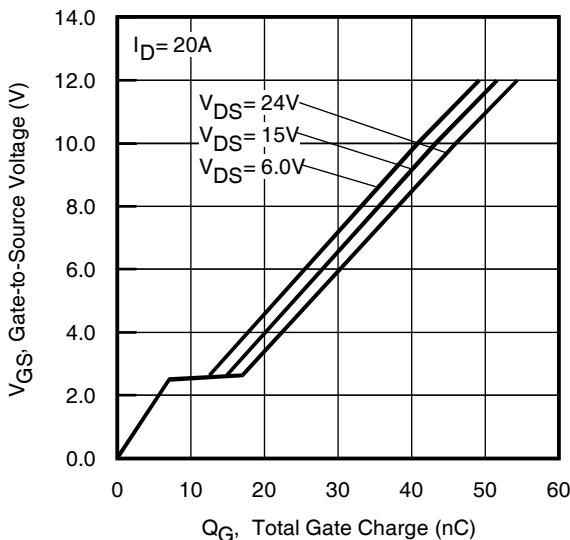**Fig 1.** Typical Output Characteristics**Fig 2.** Typical Output Characteristics**Fig 3.** Typical Transfer Characteristics**Fig 4.** Normalized On-Resistance vs. Temperature**Fig 5.** Typical Capacitance vs. Drain-to-Source Voltage**Fig 6.** Typical Gate Charge vs. Gate-to-Source Voltage

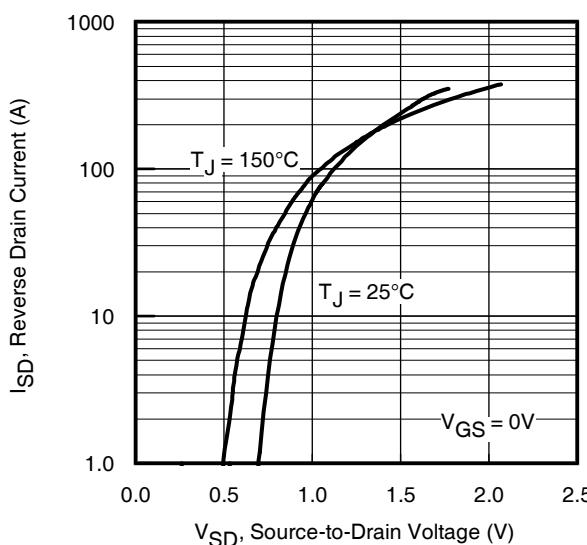


Fig 7. Typical Source-Drain Diode Forward Voltage

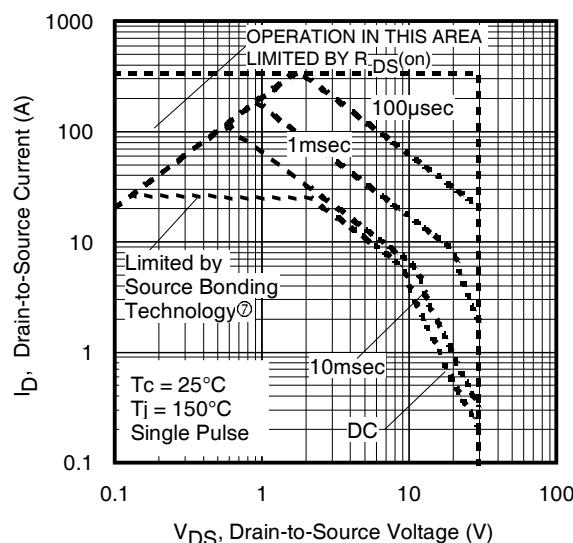


Fig 8. Maximum Safe Operating Area

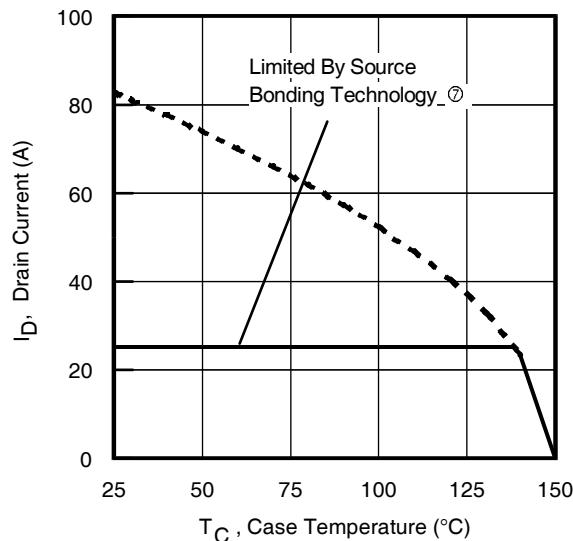


Fig 9. Maximum Drain Current vs. Case (Bottom) Temperature

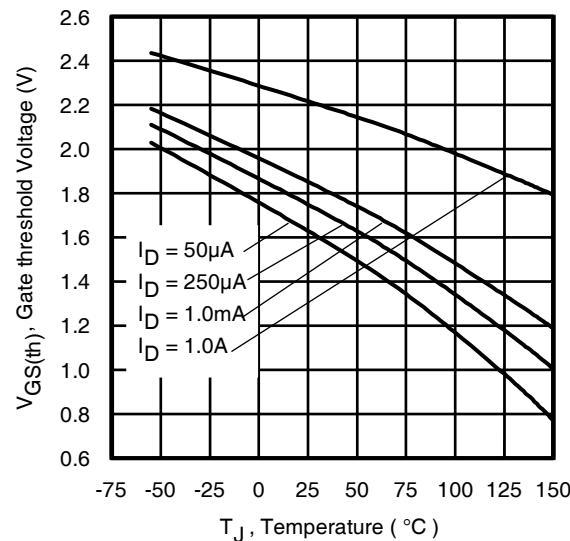


Fig 10. Threshold Voltage vs. Temperature

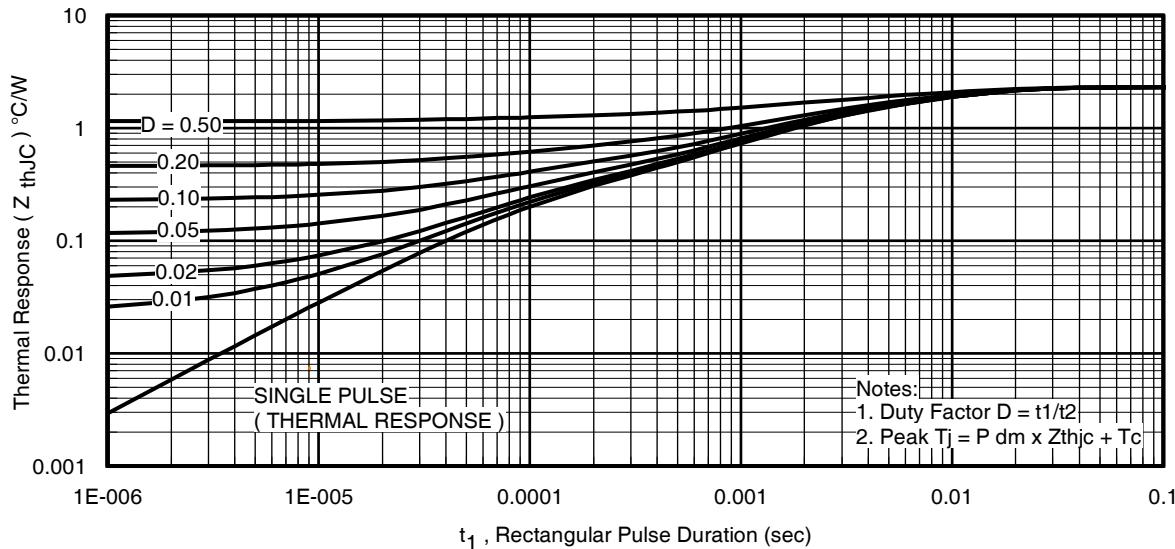
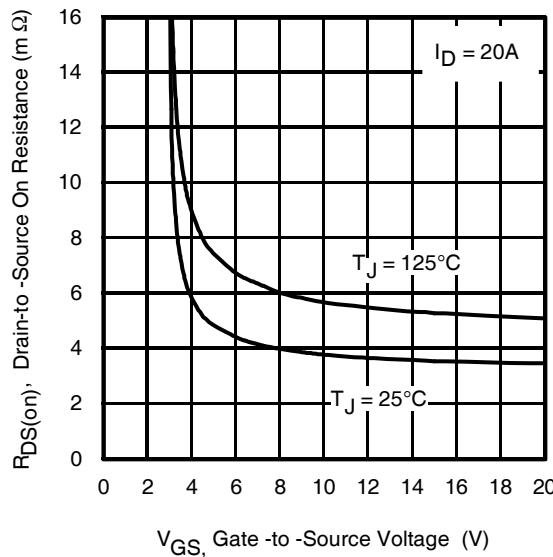
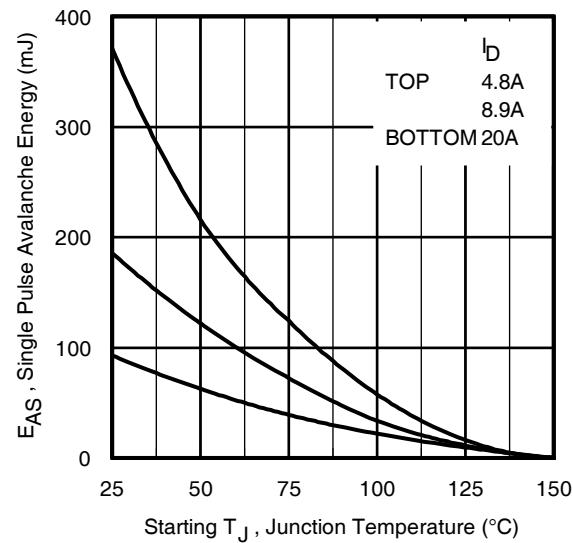
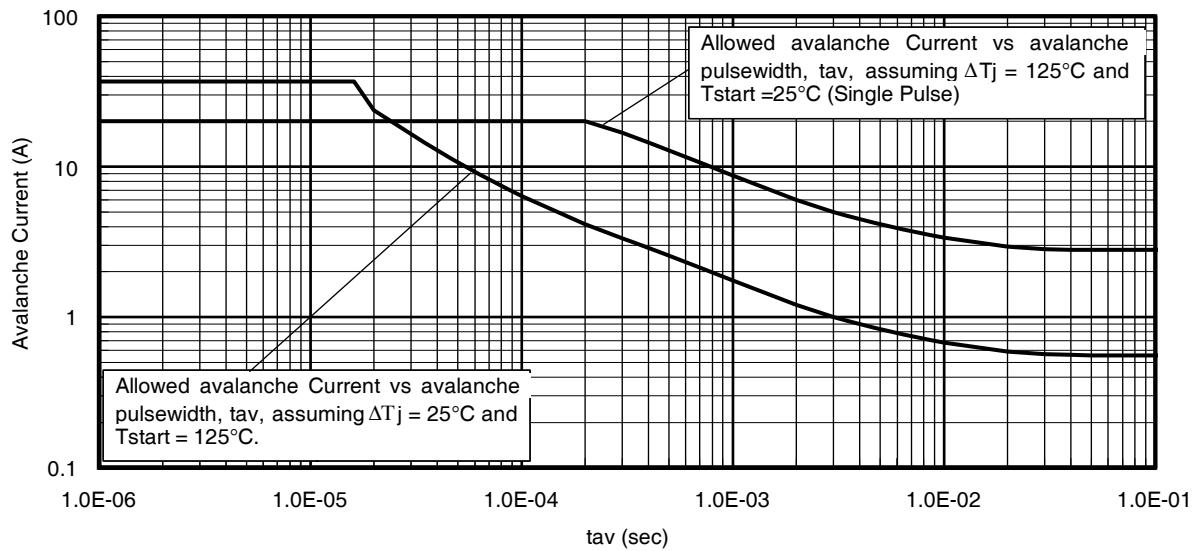


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case (Bottom)

**Fig 12.** On-Resistance vs. Gate Voltage**Fig 13.** Maximum Avalanche Energy vs. Drain Current**Fig 14.** Typical Avalanche Current vs. Pulsewidth

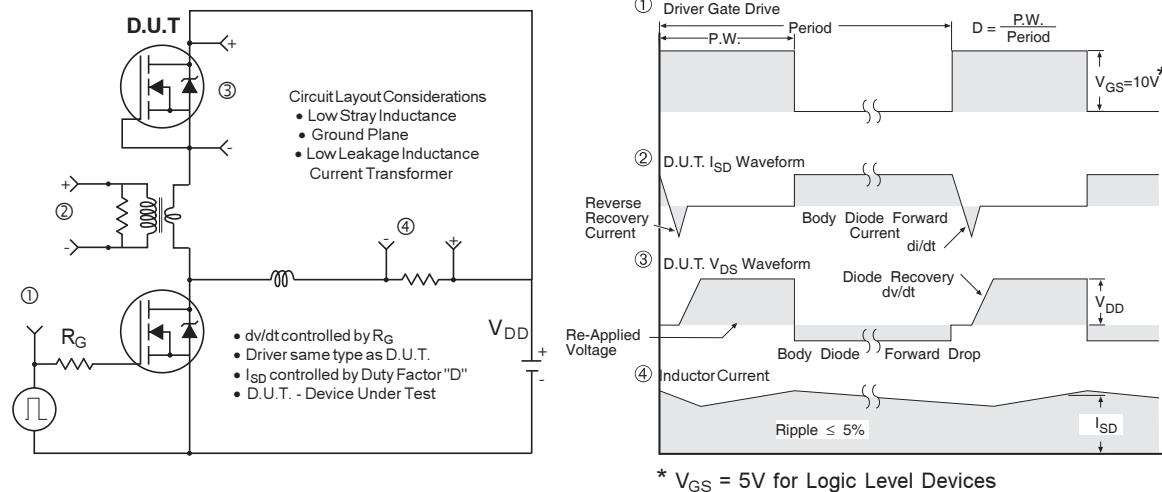


Fig 15. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs

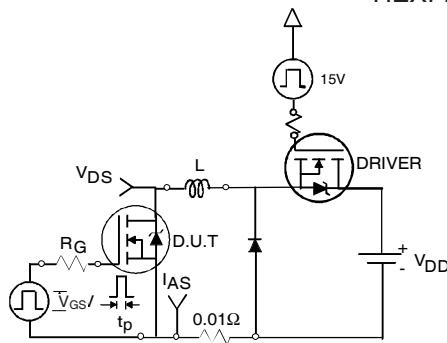


Fig 16a. Unclamped Inductive Test Circuit

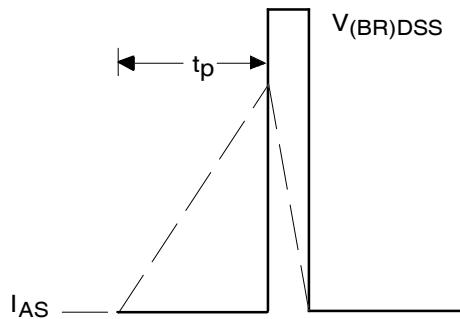


Fig 16b. Unclamped Inductive Waveforms

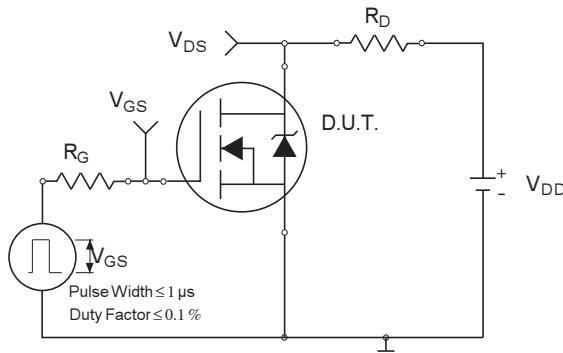


Fig 17a. Switching Time Test Circuit

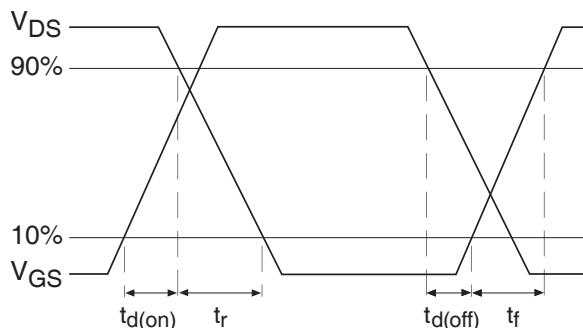


Fig 17b. Switching Time Waveforms

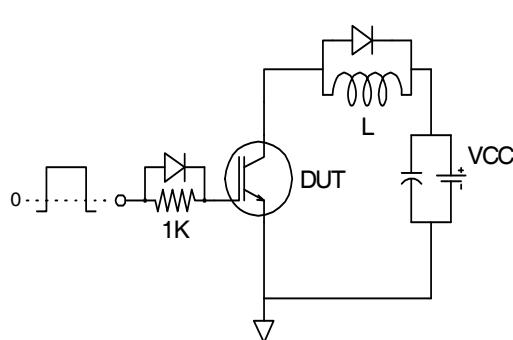


Fig 18a. Gate Charge Test Circuit



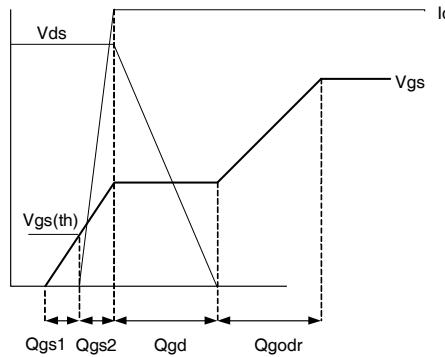


Fig 18b. Gate Charge Waveform

PQFN 5x6 Outline "E" Package Details




SIDEVIEW

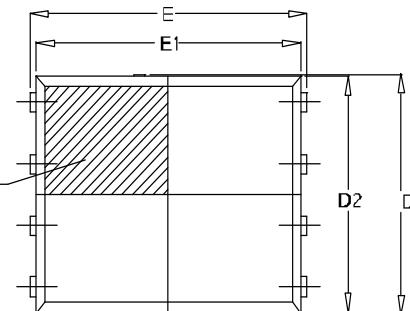

TOP VIEW


SYMBOL	OUTLINE PQFN 5X6E		
	MIN.	NOM	MAX.
A	0.90	1.03	1.17
b	0.33	0.41	0.48
C	0.20	0.25	0.35
D	4.80	4.98	5.15
D1	3.91	4.11	4.31
D2	4.80	4.90	5.00
E	5.90	6.02	6.15
E1	5.65	5.75	5.85
E2	1.10	—	—
e	1.27 BSC		
L	0.05	0.15	0.25
L1	0.38	0.44	0.50
L2	0.51	0.68	0.86
H	3.32	3.45	3.58
I	—	—	0.18

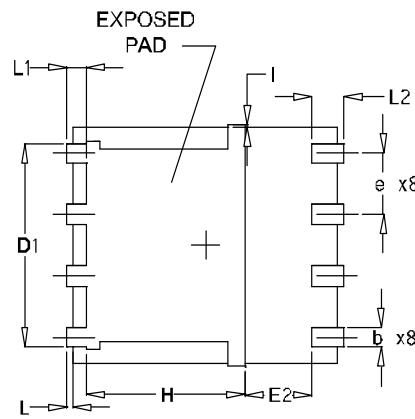

BOTTOM VIEW


For footprint and stencil design recommendations, please refer to application note: [AN-1136](#)
 For PQFN inspection techniques, please refer to application note: [AN-1154](#)

PQFN 5x6 Outline "E" Part Marking

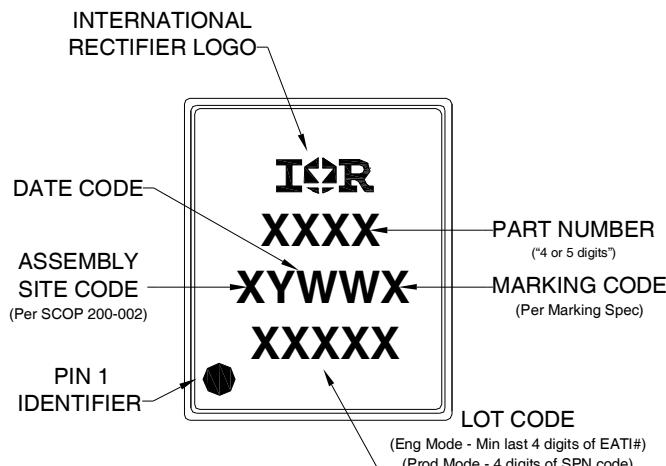


Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

PQFN 5x6 Outline "E" Tape and Reel

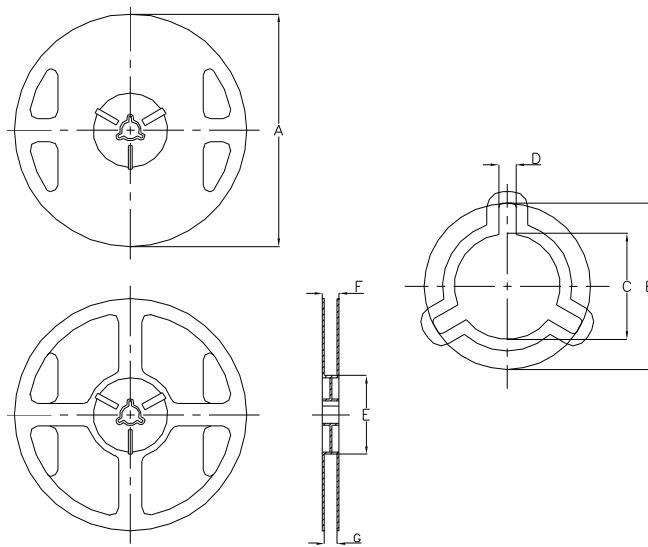

NOTE: Controlling dimensions in mm Std reel quantity is 4000 parts.

REEL DIMENSIONS								
CODE	STANDARD OPTION (QTY 4000)				TR1 OPTION (QTY 400)			
	METRIC	MIN	MAX	IMPERIAL	METRIC	MIN	MAX	IMPERIAL
A	329.5	330.5	12.972	13.011	177.5	178.5	6.988	7.028
B	20.9	21.5	0.823	0.846	20.9	21.5	0.823	0.846
C	12.8	13.5	0.504	0.532	13.2	13.8	0.520	0.543
D	1.7	2.3	0.067	0.091	1.9	2.3	0.075	0.091
E	97	99	3.819	3.898	65	66	2.350	2.598
F	Ref	17.4			Ref	12		
G	13	14.5	0.512	0.571	13	14.5	0.512	0.571

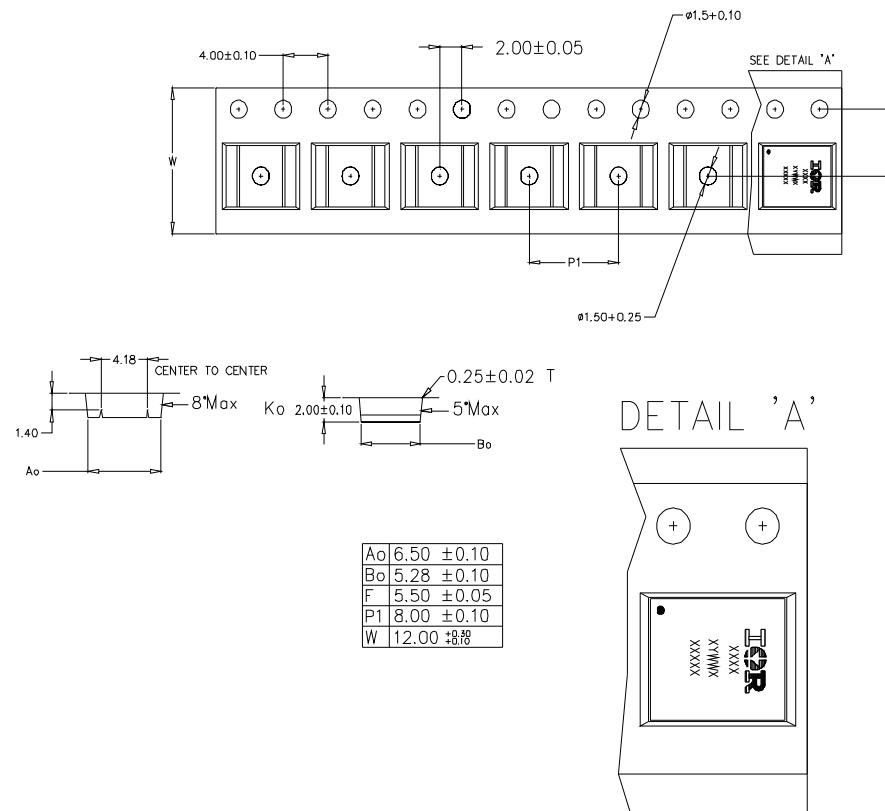

Qualification information[†]

Qualification level	Consumer ^{††} (per JEDEC JESD47F ^{†††} guidelines)	
Moisture Sensitivity Level	PQFN 5mm x 6mm	MSL1 (per JEDEC J-STD-020D ^{†††})
RoHS compliant	Yes	

[†] Qualification standards can be found at International Rectifier's web site
<http://www.irf.com/product-info/reliability>

^{††} Higher qualification ratings may be available should the user have such requirements.
 Please contact your International Rectifier sales representative for further information:
<http://www.irf.com/whoto-call/salesrep/>

^{†††} Applicable version of JEDEC standard at the time of product release.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, $L = 0.46\text{mH}$, $R_G = 50\Omega$, $I_{AS} = 20\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ R_θ is measured at T_J of approximately 90°C .
- ⑤ When mounted on 1 inch square 2 oz copper pad on 1.5x1.5 in. board of FR-4 material.
- ⑥ Calculated continuous current based on maximum allowable junction temperature.
- ⑦ Current is limited to 25A by Source Bonding Technology.

Data and specifications subject to change without notice.

International
 Rectifier

IR WORLD HEADQUARTERS: 101 N. Sepulveda Blvd., El Segundo, California 90245, USA Tel: (310) 252-7105
 TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.