

**SI-3000LSA Series**

**Surface-Mount, Low Current Consumption, Low Dropout Voltage**

**Features**

- Compact surface-mount package (SOP8)
- Output current: 1 A
- Low circuit current at output OFF:  $I_{q(OFF)} \leq 1 \mu A$  ( $V_c = 0 V$ )
- Low dropout voltage:  $V_{DIF} \leq 0.8 V$  (at  $I_o = 1 A$ )  
 $V_{DIF} \leq 1.2 V$  ( $I_o = 1 A$ ) for SI-3018LSA
- 4 types of output voltages (1.8 V, 2.5 V, 3.3 V, 5.0 V) available
- Output ON/OFF control terminal voltage compatible with LS-TTL
- Built-in foldback-type-overcurrent and thermal protection circuits

**Absolute Maximum Ratings**

( $T_a=25^\circ C$ )

Parameter	Symbol	Ratings	Unit
DC Input Voltage	$V_{IN}$	16	V
Output control terminal voltage	$V_c$	$V_{IN}$	V
DC Output Current	$I_o$	1	A
Power Dissipation	$P_{D1}^{*1}$	1.16	W
	$P_{D2}^{*2}$	1.1	W
Junction Temperature	$T_j^{*3}$	-30 to +150	$^\circ C$
Operating Ambient Temperature	$T_{op}$	-30 to +150	$^\circ C$
Storage Temperature	$T_{stg}$	-30 to +150	$^\circ C$
Thermal Resistance (Junction to Lead (pin 8))	$\theta_{j-L}$	36	$^\circ C/W$
Thermal Resistance (Junction to Ambient Air)	$\theta_{j-a}^{*2}$	100	$^\circ C/W$

\*1: When mounted on glass-epoxy board 56.5 x 56.5 mm (copper laminate area 100%).

\*2: When mounted on glass-epoxy board 40 x 40 mm (copper laminate area 100%).

\*3: Thermal protection circuits may be activated if the junction temperature exceeds 135 $^\circ C$ .

**Applications**

- Auxiliary power supplies for PC
- Battery-driven electronic equipment

**Recommended Operating Conditions**

Parameter	Symbol	Ratings				Unit
		SI-3018LSA	SI-3025LSA	SI-3033LSA	SI-3050LSA	
DC Input Voltage Range	$V_{IN}$	3.1 to 3.5 <sup>*1</sup>	<sup>*2</sup> to 3.5 <sup>*1</sup>	<sup>*2</sup> to 5.2 <sup>*1</sup>	<sup>*2</sup> to 8.0	V
DC Output Current Range	$I_o$	0 to 1				A
Operating Junction Temperature	$T_{jop}$	-20 to +125				$^\circ C$
Operating Ambient Temperature	$T_{aop}$	-30 to +85				$^\circ C$

\*1:  $V_{IN}$  (max) and  $I_o$  (max) are restricted by the relation  $P_D = (V_{IN} - V_o) \times I_o$ .

Please calculate these values referring to the reference data on page 71.

\*2: Refer to the Dropout Voltage parameter.

**Electrical Characteristics**

( $T_a=25^\circ C, V_c=2V$ , unless otherwise specified)

Parameter	Symbol	Ratings										Unit			
		SI-3018LSA			SI-3025LSA			SI-3033LSA			SI-3050LSA				
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.		typ.	max.	
Output Voltage	$V_o$	1.764	1.800	1.836	2.450	2.500	2.550	3.234	3.300	3.366	4.90	5.00	5.10	V	
Dropout Voltage	$V_{DIF}$				0.4			0.4			0.4			V	
	Conditions	$V_{IN}=3.3V, I_o=0.5A$			$I_o=0.5A$			$I_o=0.5A$			$I_o=0.5A$				
Line Regulation	$\Delta V_{LINE}$	2	10		2	10		3	10		3	15	mV		
	Conditions	$V_{IN}=3.1$ to 3.5V, $I_o=0.3A$			$V_{IN}=3.1$ to 3.5V, $I_o=0.3A$			$V_{IN}=4.5$ to 5.5V, $I_o=0.3A$			$V_{IN}=6$ to 7V, $I_o=0.3A$				
Load Regulation	$\Delta V_{LOAD}$	10	20		10	20		10	20		10	30	mV		
	Conditions	$V_{IN}=3.3V, I_o=0$ to 1A			$V_{IN}=3.3V, I_o=0$ to 1A			$V_{IN}=5V, I_o=0$ to 1A			$V_{IN}=6V, I_o=0$ to 1A				
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T_a$	$\pm 0.3$			$\pm 0.3$			$\pm 0.3$			$\pm 0.5$			mV/ $^\circ C$	
	Conditions	$V_{IN}=3.3V, I_o=5mA, T_o=0$ to 100 $^\circ C$			$V_{IN}=3.3V, I_o=5mA, T_o=0$ to 100 $^\circ C$			$V_{IN}=5V, I_o=5mA, T_o=0$ to 100 $^\circ C$			$V_{IN}=6V, I_o=5mA, T_o=0$ to 100 $^\circ C$				
Ripple Rejection	$R_{REJ}$	60			57			55			55			dB	
	Conditions	$V_{IN}=3.3V, f=100$ to 120Hz			$V_{IN}=3.3V, f=100$ to 120Hz			$V_{IN}=5V, f=100$ to 120Hz			$V_{IN}=6V, f=100$ to 120Hz				
Quiescent Circuit Current	$I_q$	1.7	2.5		1.7	2.5		1.7	2.5		1.7	2.5	mA		
	Conditions	$V_{IN}=3.3V, I_o=0A$			$V_{IN}=3.3V, I_o=0A$			$V_{IN}=5V, I_o=0A$			$V_{IN}=6V, I_o=0A$				
Circuit Current at Output OFF	$I_{q(OFF)}$	1			1			1			1			$\mu A$	
	Conditions	$V_{IN}=3.3V, I_o=0A, V_c=0V$			$V_{IN}=3.3V, I_o=0A, V_c=0V$			$V_{IN}=5V, I_o=0A, V_c=0V$			$V_{IN}=6V, I_o=0A, V_c=0V$				
Overcurrent Protection Starting Current <sup>*1,3</sup>	$I_{S1}$	1.2			1.2			1.2			1.2			A	
	Conditions	$V_{IN}=3.3V$			$V_{IN}=3.3V$			$V_{IN}=5V$			$V_{IN}=6V$				
$V_c$ Terminal	Control Voltage (Output ON) <sup>*2</sup>	$V_c, I_H$	2.0		2.0			2.0			2.0			V	
	Control Voltage (Output OFF) <sup>*2</sup>	$V_c, I_L$		0.8		0.8			0.8			0.8			
	Control Current (Output ON)	$I_c, I_H$	40	80		40	80		40	80		40	80	$\mu A$	
	Control Current (Output OFF)	$I_c, I_L$		0	-5		0	-5		0	-5		0	-5	$\mu A$
	Conditions	$V_c=2V$													
Conditions														$V_c=0V$	

\*1:  $I_{S1}$  is specified at the 5% drop point of output voltage  $V_o$  on the condition that  $V_{IN} = 3.3 V$  (5 V for SI-3033LSA), and  $I_o = 0.5 A$ .


\*2: Output is OFF when the output control terminal  $V_c$  is open. Each input level is equivalent to LS-TTL level. Therefore, the device can be driven directly by LS-TTLs.

\*3: These products cannot be used in the following applications. Because these applications require a certain current at start-up and so the built-in foldback-type overcurrent protection may cause errors during start-up stage.

- (1) Constant current load (2) Positive and negative power supply (3) Series-connected power supply (4)  $V_o$  adjustment by raising ground voltage

External Dimensions (SOP8)


(Unit : mm)

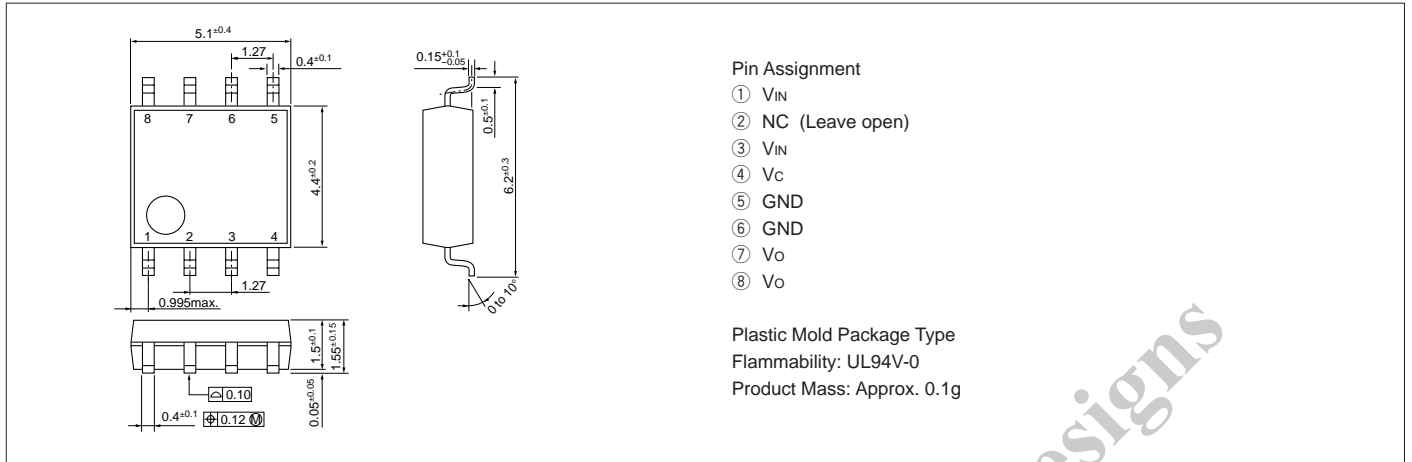

Block Diagram



Typical Connection Diagram

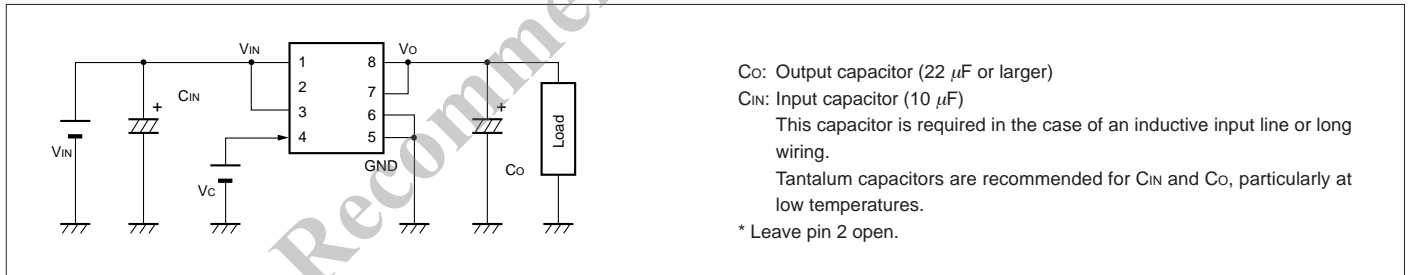

Reference Data

