

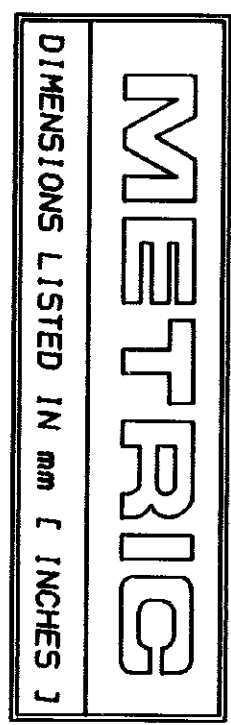


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	F	ZONE	LTR	DESCRIPTION	DATE	APPD
G	14	P			REVISED & REDRAWN PER 0720-0303-93	8-30-93	BB

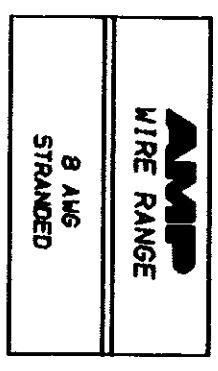

- NOTE:
1. WIRE INSULATION DIA "A" 6.48 [255] MAX
 2. WIRE INSULATION DIA "B" 8.51 [335] MAX

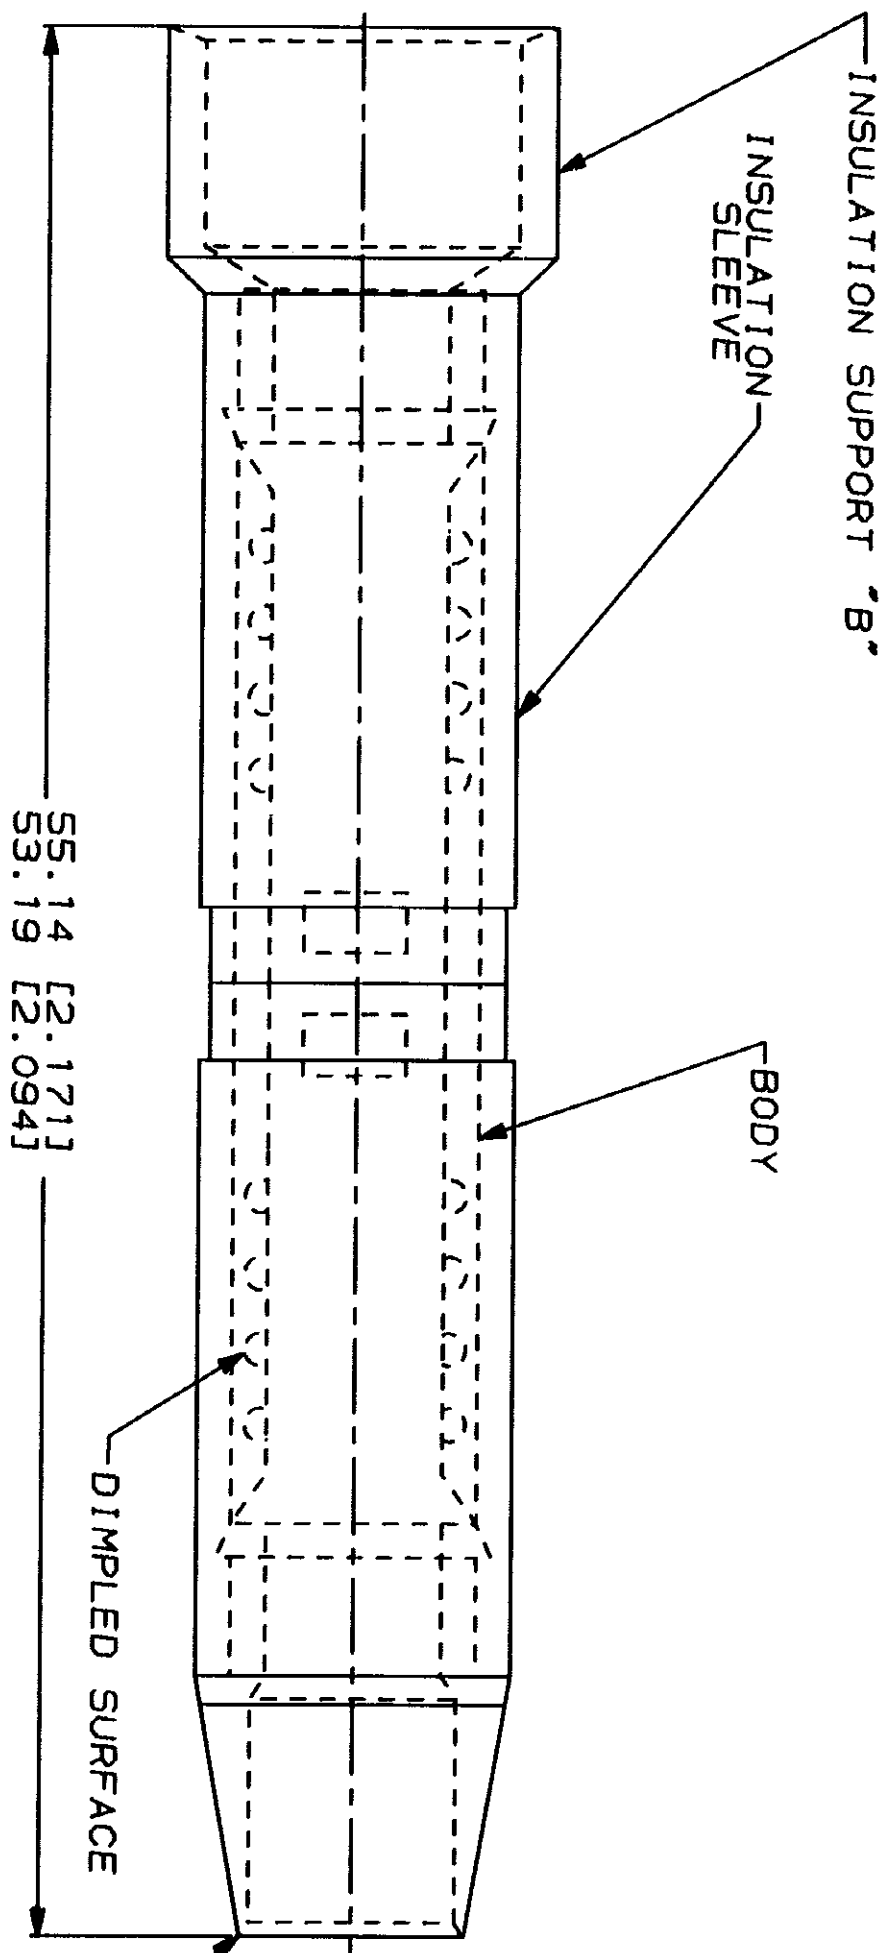

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 8-30-93 S.S. GULLSEN		100		LOOSE PC		324658			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		TOLERANCES ON: 1 PLG DEC # 0.20 (0.008) 2 PLG DEC # - 3 PLG DEC # - 4 PLG DEC # - 5 PLG DEC # - MATERIAL		CHK 8-30-93 R. HERBERY		QTY		PACKAGE TYPE		PART NO	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 6.64-10.5mm² (13,100-20,800)		APPD 8-30-93 B. BAUE		NAME		SPLICE, BUTT, SINGLE TO MULTIPLE, TERMINAL, WIRE SIZE: 8 AWG		AMP INCORPORATED Harrisburg, PA 17105-3608			
TOOLING INFORMATION		1-800-526-5142		STRANDED		APPD 8-30-93 M. BLIS		PRODUCT SPEC		APPLICATION SPEC		SIZE		CAGE CODE	
FOR ORDER ENTRY		1-800-526-5142		FINISH		TIN PLATE		PER MIL-T-10727		WEIGHT		SCALE		DRAWING NO	
												B		00779	
												NTS		324658	
														1 OF 1	

AMP 1400-15 REV 3-92 10 JAN 1994 15:04:32 AMP10744 <UJ12BA>DEPT1132>AMP10744XU.TERMINL-SPLICE-CUST CUSTOMER DRAWING