

HA-2600, HA-2602, HA-2605

12MHz, High Input Impedance
Operational Amplifiers

November 1996

Features

- Bandwidth.....12MHz
- High Input Impedance.....500MΩ
- Low Input Bias Current.....1nA
- Low Input Offset Current.....1nA
- Low Input Offset Voltage.....0.5mV
- High Gain.....150kV/V
- Slew Rate.....7V/μs
- Output Short Circuit Protection
- Unity Gain Stable

Applications


- Video Amplifier
- Pulse Amplifier
- Audio Amplifiers and Filters
- High-Q Active Filters
- High-Speed Comparators
- Low Distortion Oscillators

Ordering Information


| PART NUMBER (BRAND) | TEMP. RANGE (°C) | PACKAGE | PKG. NO. |
|------------------------|---------------------|-----------------|-------------|
| HA2-2600-2 | -55 to 125 | 8 Pin Metal Can | T8.C |
| HA2-2602-2 | -55 to 125 | 8 Pin Metal Can | T8.C |
| HA2-2605-5 | 0 to 75 | 8 Pin Metal Can | T8.C |
| HA3-2605-5 | 0 to 75 | 8 Ld PDIP | E8.3 |
| HA7-2600-2 | -55 to 125 | 8 Ld CERDIP | F8.3A |
| HA7-2602-2 | -55 to 125 | 8 Ld CERDIP | F8.3A |
| HA7-2605-5 | 0 to 75 | 8 Ld CERDIP | F8.3A |
| HA9P2605-5 (H26055) | 0 to 75 | 8 Ld SOIC | M8.15 |

Pinouts

HA-2600/02 (CERDIP)
HA-2605 (PDIP, CERDIP, SOIC)
TOP VIEW



HA-2600/02/05
(METAL CAN)
TOP VIEW



3

OPERATIONAL
AMPLIFIERS

Absolute Maximum Ratings

| | |
|---|-------------------------------|
| Supply Voltage Between V+ and V- Terminals..... | 45V |
| Differential Input Voltage..... | 12V |
| Peak Output Current..... | Full Short Circuit Protection |

Operating Conditions

| | |
|------------------------|----------------|
| Temperature Range | |
| HA-2600/HA-2602-2..... | -55°C to 125°C |
| HA-2605-5..... | 0°C to 75°C |
| HA-2605-9..... | -40°C to 85°C |

Thermal Information

| Thermal Resistance (Typical, Note 1) | θ_{JA} (°C/W) | θ_{JC} (°C/W) |
|---|----------------------|----------------------|
| Metal Can Package | 165 | 80 |
| PDIP Package | 96 | N/A |
| CERDIP Package | 135 | 50 |
| SOIC Package | 157 | N/A |
| Maximum Junction Temperature (Hermetic Package) | 175°C | |
| Maximum Junction Temperature (Plastic Package) | 150°C | |
| Maximum Storage Temperature Range | -65°C to 150°C | |
| Maximum Lead Temperature (Soldering 10s) | 300°C | |
| (SOIC - Lead Tips Only) | | |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

1. θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

Electrical Specifications $V_{SUPPLY} = \pm 15V$, Unless Otherwise Specified


| PARAMETER | TEMP. (°C) | HA-2600-2 | | | HA-2602-2 | | | HA-2605-9 HA-2605-5 | | | UNITS |
|---|---------------|-----------|----------|-----|-----------|----------|-----|------------------------|----------|-----|------------------------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| INPUT CHARACTERISTICS | | | | | | | | | | | |
| Offset Voltage | 25 | - | 0.5 | 4 | - | 3 | 5 | - | 3 | 5 | mV |
| | Full | - | 2 | 6 | - | - | 7 | - | - | 7 | mV |
| Average Offset Voltage Drift | Full | - | 5 | - | - | 5 | - | - | 5 | - | μ V/°C |
| Bias Current (Note 2) | 25 | - | 1 | 10 | - | 15 | 25 | - | 5 | 25 | nA |
| | Full | - | 10 | 30 | - | - | 60 | - | - | 40 | nA |
| Offset Current (Note 2) | 25 | - | 1 | 10 | - | 5 | 25 | - | 5 | 25 | nA |
| | Full | - | 5 | 30 | - | - | 60 | - | - | 40 | nA |
| Differential Input Resistance (Note 12) | 25 | 100 | 500 | - | 40 | 300 | - | 40 | 300 | - | MΩ |
| Input Noise Voltage Density ($f = 1\text{kHz}$) | 25 | - | 11 | - | - | 11 | - | - | 11 | - | nV/ $\sqrt{\text{Hz}}$ |
| Input Noise Current Density ($f = 1\text{kHz}$) | 25 | - | 0.16 | - | - | 0.16 | - | - | 0.16 | - | pA/ $\sqrt{\text{Hz}}$ |
| Common Mode Range | Full | ± 11 | ± 12 | - | ± 11 | ± 12 | - | ± 11 | ± 12 | - | V |
| TRANSFER CHARACTERISTICS | | | | | | | | | | | |
| Large Signal Voltage Gain (Notes 3, 6) | 25 | 100 | 150 | - | 80 | 150 | - | 80 | 150 | - | kV/V |
| | Full | 70 | - | - | 60 | - | - | 70 | - | - | kV/V |
| Common Mode Rejection Ratio (Note 4) | Full | 80 | 100 | - | 74 | 100 | - | 74 | 100 | - | dB |
| Minimum Stable Gain | 25 | 1 | - | - | 1 | - | - | 1 | - | - | V/V |
| Gain Bandwidth Product (Note 5) | 25 | - | 12 | - | - | 12 | - | - | 12 | - | MHz |
| OUTPUT CHARACTERISTICS | | | | | | | | | | | |
| Output Voltage Swing (Note 3) | Full | ± 10 | ± 12 | - | ± 10 | ± 12 | - | ± 10 | ± 12 | - | V |
| Output Current (Note 6) | 25 | ± 15 | ± 22 | - | ± 10 | ± 18 | - | ± 10 | ± 18 | - | mA |
| Full Power Bandwidth (Notes 6, 13) | 25 | 50 | 75 | - | 50 | 75 | - | 50 | 75 | - | kHz |
| TRANSIENT RESPONSE (Note 10) | | | | | | | | | | | |
| Rise Time (Notes 3, 7, 8, 9) | 25 | - | 30 | 60 | - | 30 | 60 | - | 30 | 60 | ns |
| Overshoot (Notes 3, 7, 8, 9) | 25 | - | 25 | 40 | - | 25 | 40 | - | 25 | 40 | % |
| Slew Rate (Notes 3, 7, 9, 14) | 25 | ± 4 | ± 7 | - | ± 4 | ± 7 | - | ± 4 | ± 7 | - | $\text{V}/\mu\text{s}$ |
| Settling Time (Notes 3, 7, 15) | 25 | - | 1.5 | - | - | 1.5 | - | - | 1.5 | - | μs |

Electrical Specifications $V_{SUPPLY} = \pm 15V$, Unless Otherwise Specified (Continued)

| PARAMETER | TEMP. (°C) | HA-2600-2 | | | HA-2602-2 | | | HA-2605-9 HA-2605-5 | | | UNITS |
|--|---------------|-----------|-----|-----|-----------|-----|-----|------------------------|-----|-----|-------|
| | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| POWER SUPPLY CHARACTERISTICS | | | | | | | | | | | |
| Supply Current | 25 | - | 3 | 3.7 | - | 3 | 4 | - | 3 | 4 | mA |
| Power Supply Rejection Ratio (Note 11) | Full | 80 | 90 | - | 74 | 90 | - | 74 | 90 | - | dB |

NOTES:

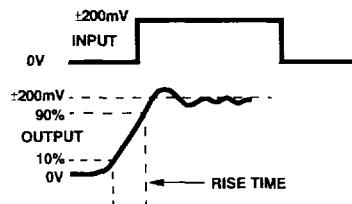2. Typical and minimum specifications for -9 are identical to those of -5. All maximum specifications for -9 are identical to those of -5 except for Full Temperature Bias and Offset Currents, which are 70nA Max
3. $R_L = 2k\Omega$.
4. $V_{CM} = \pm 10V$.
5. $V_{OUT} < 90mV$.
6. $V_{OUT} = \pm 10V$.
7. $C_L = 100pF$.
8. $V_{OUT} = \pm 200mV$.
9. $A_V = +1$.
10. See Transient Response Test Circuits and Waveforms.
11. $\Delta V_S = \pm 5V$.
12. This parameter value guaranteed by design calculations.
13. Full Power Bandwidth guaranteed by slew rate measurement: $FPBW = \frac{\text{Slew Rate}}{2\pi V_{PEAK}}$.
14. $V_{OUT} = \pm 5V$
15. Settling time is characterized at $A_V = -1$ to 0.1% of a 10V step.

Test Circuits and Waveforms

NOTE: Measured on both positive and negative transitions from 0V to +/-200mV and 0V to -200mV at the output.

FIGURE 1. TRANSIENT RESPONSE




FIGURE 2. SLEW RATE


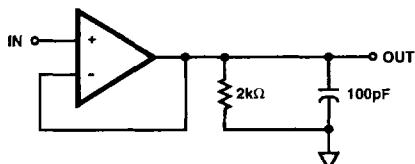



FIGURE 3. SLEW RATE AND TRANSIENT RESPONSE TEST CIRCUIT




NOTE: Tested offset adjustment range is $|V_{OS}| + 1mV$ minimum referred to output. Typical ranges are $\pm 10mV$ with $R_T = 100k\Omega$.

FIGURE 4. SUGGESTED V_{OS} ADJUSTMENT AND COMPENSATION HOOK UP

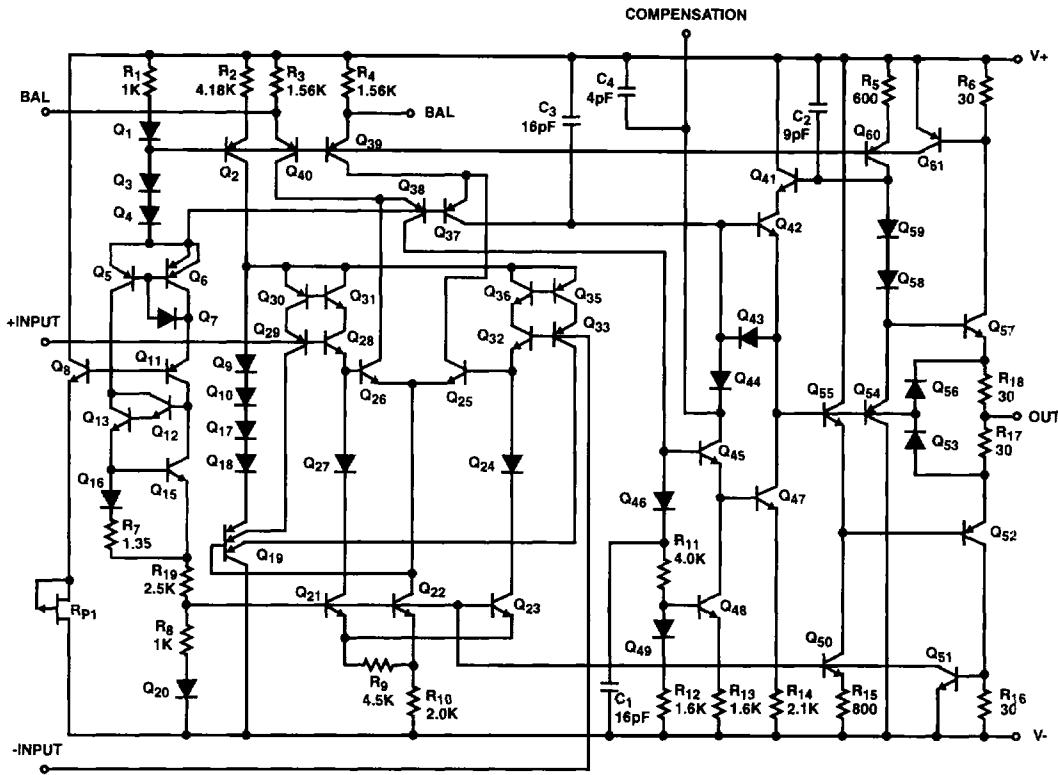Schematic Diagram




Typical Applications

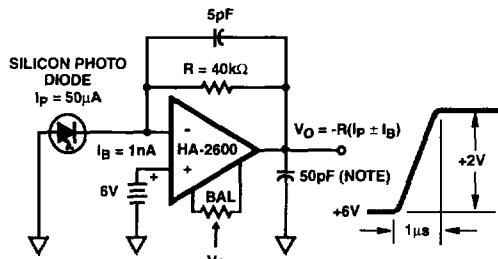

FEATURES:

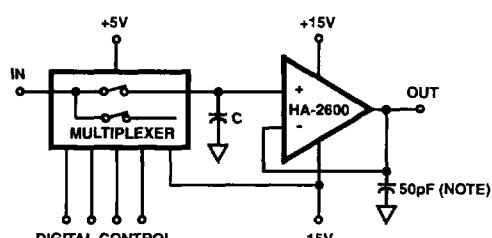1. Constant cell voltage.
2. Minimum bias current error.



NOTE: A small load capacitance is recommended in all applications where practical to prevent possible high frequency oscillations resulting from external wiring parasitics. Capacitance up to 100pF has negligible effect on the bandwidth or slew rate.


FIGURE 5. PHOTO CURRENT TO VOLTAGE CONVERTER

$$\text{DRIIFT RATE} = \frac{I_{\text{BIAS}}}{C}$$

If $C = 1000 \text{ pF}$
Then DRIFT = $0.01 \text{ V}/\mu\text{s}$ (Max)

FIGURE 6. SAMPLE AND HOLD

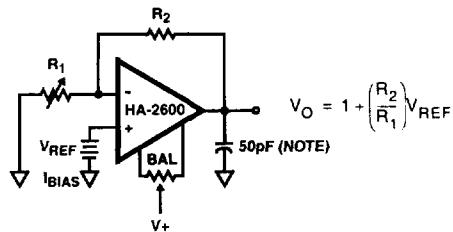Typical Applications (Continued)




FEATURES:

1. Minimum bias current in reference cell.
2. Short Circuit Protection.

NOTE: A small load capacitance is recommended in all applications where practical to prevent possible high frequency oscillations resulting from external wiring parasitics. Capacitance up to 100pF has negligible effect on the bandwidth or slew rate.

FIGURE 7. REFERENCE VOLTAGE AMPLIFIER



FEATURES

1. $Z_{IN} = 10^{12}\Omega$ (Min).
2. $Z_{OUT} = 0.01\Omega$ (Max), B.W. = 12MHz (Typ).
3. Slew Rate = 4V/ μ s (Min), Output Swing = $\pm 10V$ (Min) to 50kHz.

FIGURE 8. VOLTAGE FOLLOWER

Typical Performance Curves $V_S = \pm 15V$, $T_A = 25^\circ C$, Unless Otherwise Specified

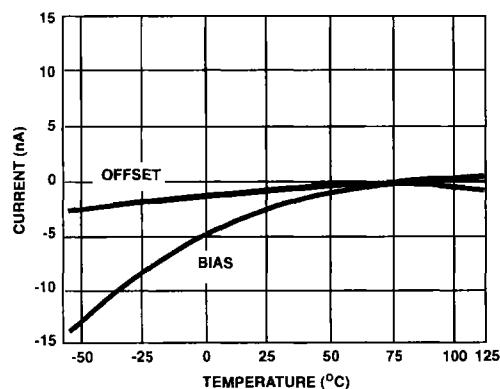


FIGURE 9. INPUT BIAS CURRENT AND OFFSET CURRENT
vs TEMPERATURE

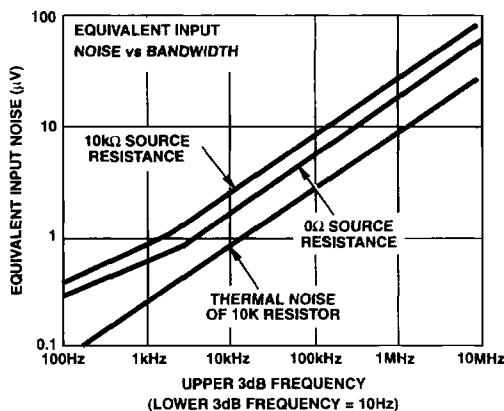


FIGURE 10. BROADBAND NOISE CHARACTERISTICS

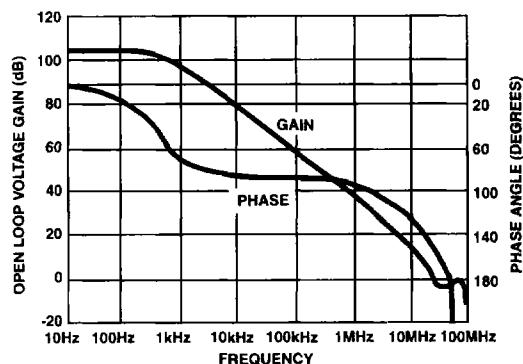


FIGURE 11. OPEN LOOP FREQUENCY RESPONSE

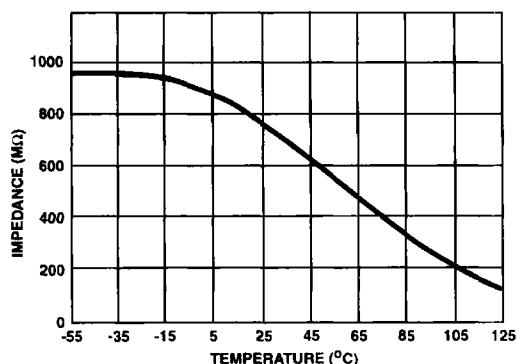


FIGURE 12. INPUT IMPEDANCE vs TEMPERATURE (100Hz)


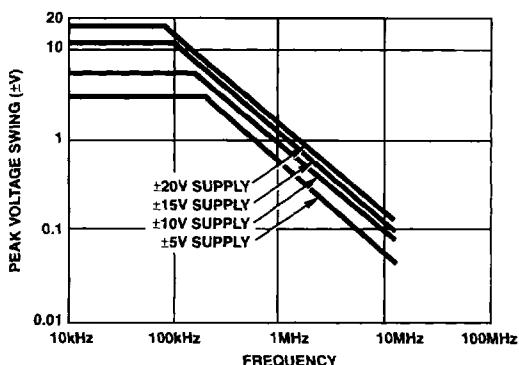
Typical Performance Curves $V_S = \pm 15V$, $T_A = 25^\circ C$, Unless Otherwise Specified (Continued)

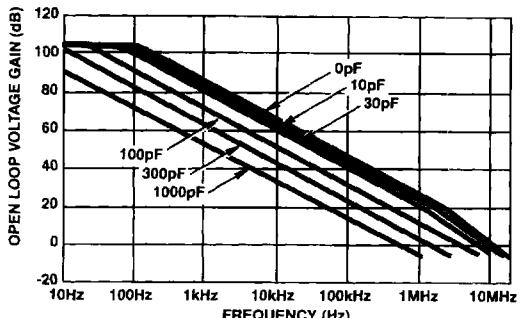FIGURE 13. OUTPUT VOLTAGE SWING vs FREQUENCY



NOTE: External compensation components are not required for stability, but may be added to reduce bandwidth if desired. If External Compensation is used, also connect 100pF capacitor from output to ground.

FIGURE 14. OPEN LOOP FREQUENCY RESPONSE FOR VARIOUS VALUES OF CAPACITORS FROM COMPENSATION PIN TO GROUND

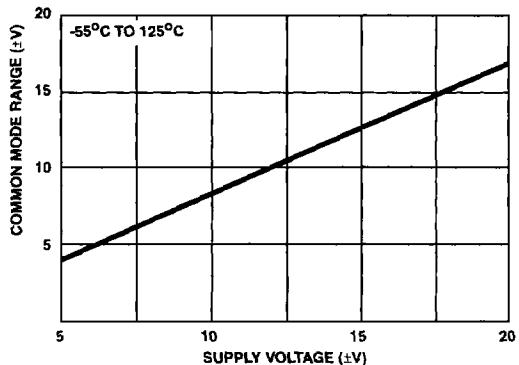


FIGURE 15. COMMON MODE VOLTAGE RANGE vs SUPPLY VOLTAGE

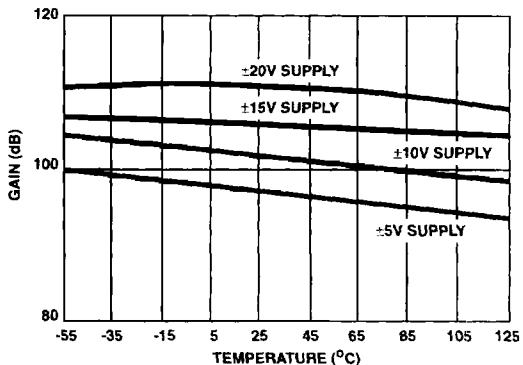


FIGURE 16. OPEN LOOP VOLTAGE GAIN vs TEMPERATURE

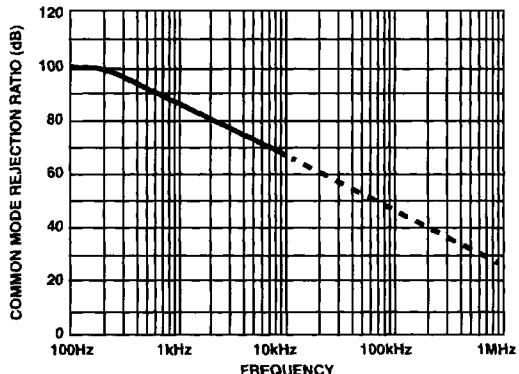


FIGURE 17. COMMON MODE REJECTION RATIO vs FREQUENCY

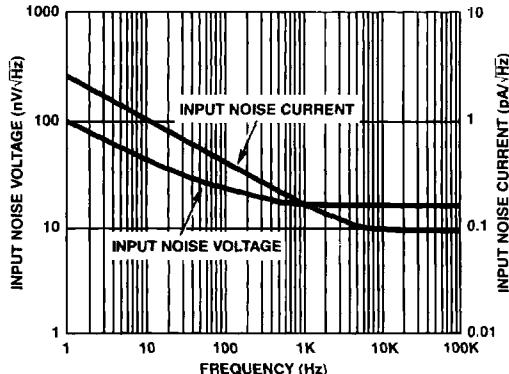


FIGURE 18. NOISE DENSITY vs FREQUENCY

Die Characteristics**DIE DIMENSIONS:**

69 mils x 56 mils x 19 mils
 1750 μ m x 1420 μ m x 483 μ m

METALLIZATION:

Type: Al, 1% Cu
 Thickness: 16k \AA \pm 2k \AA

SUBSTRATE POTENTIAL (Powered Up):

Unbiased

PASSIVATION:

Type: Nitride (Si_3N_4) over Silox (SiO_2 , 5% Phos.)
 Silox Thickness: 12k \AA \pm 2k \AA
 Nitride Thickness: 3.5k \AA \pm 1.5k \AA

TRANSISTOR COUNT:

140

PROCESS:

Bipolar Dielectric Isolation

Metallization Mask Layout

HA-2600, HA-2602, HA-2605

