




Extractor Tool

Application Tooling Specification Sheet



Order No. 63824-3300

FEATURES

- This Extractor Tool is for opening the Secondary Lock from 55 Circuit CMX Receptacle.

SCOPE

Products: CMX Receptacle Connector Assembly, 55 Circuits, Right and Left Slide Orientation.

Housing Series No	Housing Order No.					
560065	560065-5511	560065-5512	560065-5521	560065-5522		
502725	502725-5511	502725-5512	502725-5521	502725-5522	50272-5523	50272-5524

OPERATION:

Opening the (TPA) Secondary Lock

On a CMX receptacle assembly follow the steps below:

1. Insert the extractor tool into the (2) side slots of the (TPA) secondary lock on each sides until it stops. See Figure 1.

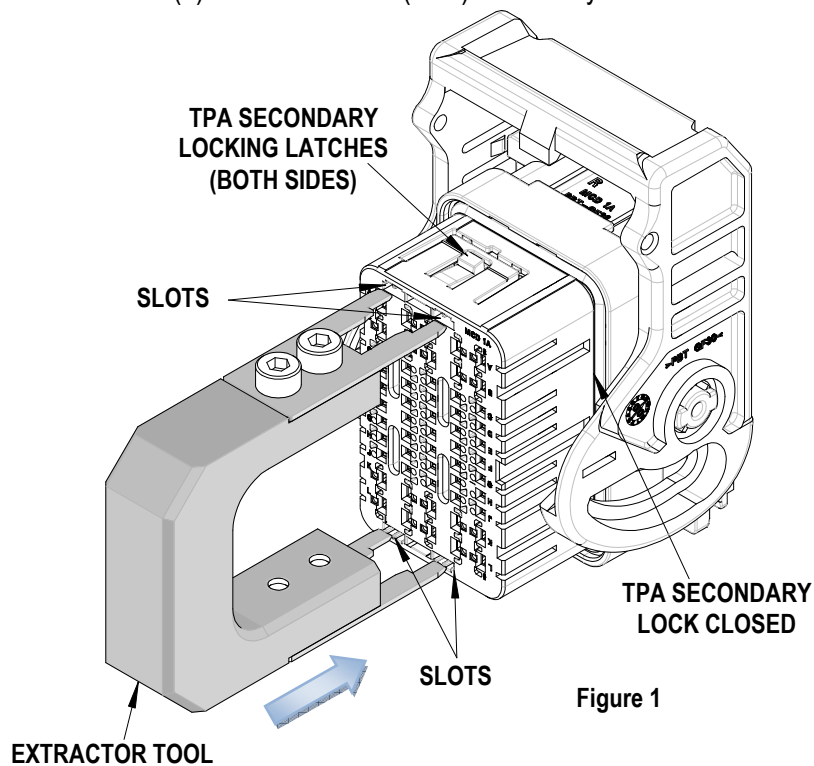

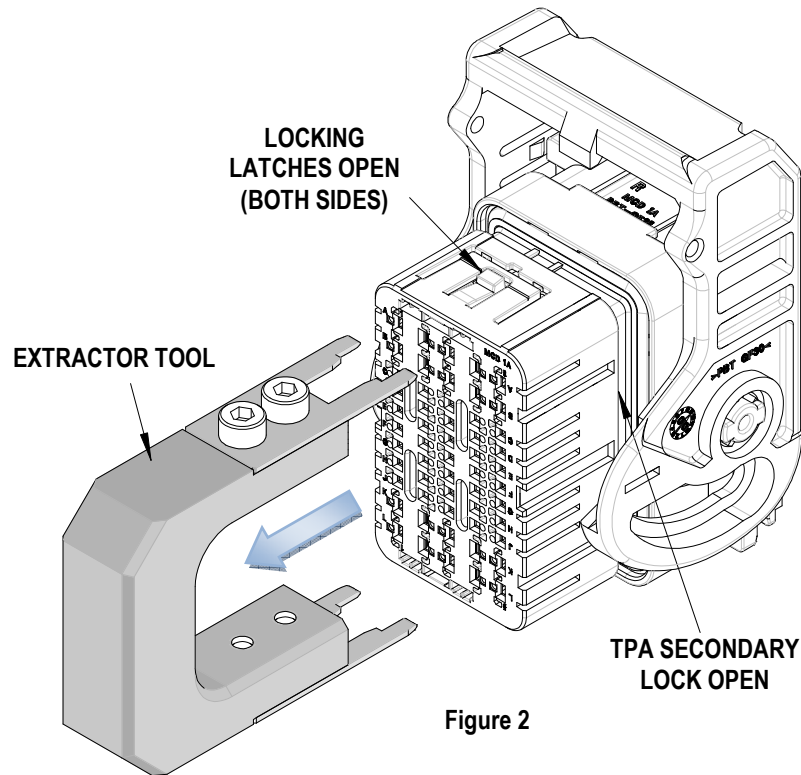


Figure 1

2. While keeping the extractor tool in this position pull down on the sides of the (TPA) secondary lock without touching the latches.
3. Pull the TPA out just enough so that the locking latches are visible.  **Do not remove the TPA.** See Figure 2.
4. Remove the extractor tool and check the position of the TPA.



CAUTION: Molex specifications are valid only when used with Molex terminals, applicators and tooling.

Molex does not offer repair parts for Extractor Tools due to the inexpensive nature of these tools.

Contact Information

For more information on Molex application tooling please contact Molex at 1-800-786-6539.

Visit our Web site at <http://www.molex.com>